



FEAST
ELECTRICAL SUPPLY INC

**ELECTRICAL FITTINGS
& ACCESSORIES**

2026 - US EDITION



Table of Contents

Section One

CONDUIT

1-4

EMT - Electrical Metallic Tubing	1
IMC - Intermediate Metal Conduit	2
Rigid Metal Conduit	3
Flexible Metal Conduit	4
Steel	4
Aluminum	4

Section Two

ELBOWS, NIPPLES & COUPLINGS

5-14

EMT Elbows	5
90° Elbows	5
45° Elbows	5
30° Elbows	6
22.5° Elbows	6
15° Elbows	7
RIGID Steel Elbows	7
90° Rigid Elbows	7
45° Rigid Elbows	8
30° Elbows	8
22.5° Elbows	9
15° Elbows	9
RIGID Steel Special Radius Elbows	10
2" Special Radius Elbows	10
2 1/2" Special Radius Elbows	10
3" Special Radius Elbows	11
4" Special Radius Elbows	11
5" and 6" Rigid Special Radius Elbows	11
RIGID Steel Nipples	12-13
RIGID Steel Couplings	14

Section Three

EMT FITTINGS

15-23

Compression Type	15
Compression Couplings	15
Raintight Compression Couplings	15
Compression Connectors	16
Insulated Compression Connectors	16
Raintight Compression Connector	17
Insulated Raintight Compression Connector	17
Set-Screw Type	18
Set Screw Couplings	18
Set-Screw Connectors	18
Insulated Set-Screw Connectors	19
EMT Slip Couplings	20
EMT Straps	21

Snap-On Type One Hole	21
Snap-On Two Hole	21
Combination Pull Elbows	22
Set-Screw Pull Elbows	22
Set-Screw Pull Elbow/Connector	22
Installation Examples	23

Section Four

RIGID FITTINGS

24-41

Chase Nipples	24
1" Length Chase Nipples	24
Three-Piece Coupling	25
Reducing Bushing	26
Threaded Rigid Conduit and IMC Enlargers	26-27
Grounding Bushings	27-28
Conduit Bushings	28
Insulating Plastic Bushings	29
RIGID Watertight Hubs	29-30
Grounding Watertight Hubs	30-31
Compression Connectors	32
Insulated Compression Connectors	33
Compression Couplings	34
Insulated raintight compression Connectors	35
Raintight Compression Couplings	35
RIGID Offset Nipples	36
Zinc Die Cast 3/4" Offset Nipple	36
Malleable Iron 3/4" Offset Nipple	36
Box Spacer	37
Bonding Locknuts	37
Steel Locknuts	38
Reducing Washers	39
RIGID Straps	40
Snap-On One Hole RIGID Straps	40
Snap-On Two Hole RIGID Straps	40
One Hole Strap	41
Clamp Back	41
Clamp Back	41

Section Five

CONDUIT BODIES

42-56

Conduit Bodies	42-51
EMT - Set-Screw	42
RIGID - Threaded	42
COMBO - (EMT/RIGID/IMC)	43
LB Type - COMBO	43
Threaded C Type	43
C Type	44
Threaded LL Type	44

LLC Type	45
Threaded LR Type	45
LRC Type	46
Threaded T Type	46
T Type	47
TBC Type	47
XC Type	48
Threaded LB Type	48
Threaded C Type	49
Threaded LL	49
Threaded LR Type	50
Threaded T Type	50
Threaded X Type	50
Threaded TB Type	50
Gray Iron Conduit Bodies	52-56
LB Type-Form 7	52
C Type-Form 7	52
T Type-Form 7	53
LL Type-Form 7	53
LR Type-Form 7	54
TB Type-Form 7	54
X Type-Form 7	55
Form 7 Conduit Body Cover	56
Steel	56
Gray Iron	56

Section Six **LIQUIDTIGHT FITTINGS**

57-62

Non-Metallic	57
Straight Connectors	57
90° Connectors	57
Metallic Liquidtight Fittings	58-6
Straight Connector - Zinc Die Cast	58
90° Connector - Zinc Die Cast	58
Straight Connector - Malleable Iron	59
45° Connector - Malleable Iron	59
90° Connector - Malleable Iron	60
Sealing Rings	60
Liquidtight Conduit	61-62
Top-Flex 1 Tubing	61
Metallic Liquidtight Conduit	62

Section Seven **TRANSITION FITTINGS**

63-67

Combination Coupling - EMT/FMC	63
Squeeze Type Combination Couplings	63
Compression Type Combination Couplings	63

Top-Bite Saddle Type Couplings	64
Top-Bite Saddle Type Strap Set Screw Couplings	65
RIGID Combination Couplings	66
Set Screw type Combination Coupling	66
Raintight Compression Couplings	67
Liquid Tight Combination Couplings	67

Section Eight **HANGING & SUPPORT**

68-73

Conduit Support Brackets	68-69
Pipe Hangers	68
Universal Conduit Clamps	69
Right Angle Clamps	70
Parallel Clamps	70
Edge Type Clamps	71
U Bolts - Heavy Duty	71
Beam Clamps	72
Grounding Clamps	72
Accessories	
Knockout Seals	73
Switch Box Support Brackets (F-Brackets)	73

Section Nine **STEEL BOXES & COVERS**

74-91

Gangable Switch Boxes	74-75
3x2" (1 1/2" Deep)	74
3x2" (2" Deep)	74
3x2" (2 1/2" Deep)	74
3x2" (2 3/4" Deep)	75
3x2" (3 1/2" Deep)	75
Multi-Gang Switch Boxes	76
1 5/8" Deep	76
2 1/2" Deep	76
Drawn Boxes	77-78
4x2" Handy Boxes (1 1/2" Deep)	77
4x2" Handy Boxes (1 7/8" Deep)	77
4x2" Handy Boxes (2 1/8" Deep)	78
4x2" Handy Box Extensions & Covers	78
Octagon Boxes	79-80
4" Octagon Boxes 1 1/2" Deep	79
4" Octagon Boxes with Brackets & Supports	79
4" Octagon Drawn Deep Boxes	80
4" Octagon Box Covers	80
Round Pancake Boxes & Covers	81
4" Swivel Covers Round	81
4" Swivel Covers Square	81
Square Boxes	82-85

4 11/16" Square Welded Boxes	82
4 11/16" Box Covers	82
4" Square Drawn Boxes	83
4" Square Drawn Deep Boxes	83
4" Square Welded Boxes	84
4" Square Welded Deep Boxes	84
4" Square Box Covers	85
Switch Box Support Brackets	85
4" Square Box Extensions	86
4" Square Single Gang Device Rings	86
4" Square Double Gang Device Rings	87
4" Square to Round Device Rings	87
4" Industrial Covers	88
Masonry Boxes - Ganged	89
2 1/2" Deep	89
3 1/2" Deep	89
Masonry Boxes - Gangable	90
3 1/2" Deep Gangable	90
Adjustable Device Rings	91
Gang Box Device Rings	91

Section Ten **BX, FLEX, & MC FITTINGS** **92-107**

FMC FITTINGS	92-93
Squeeze Type Straight Connector - Zinc Die Cast	92
Squeeze Type 90° Connector - Zinc Die Cast	92
Squeeze Type Straight Connector - Malleable Iron	93
Squeeze Type 90° Connector - Malleable Iron	93
Top-Bite Saddle Type Connectors	94-96
Straight Connectors	94
45° Connectors	95
90° Connectors	96
FMC Screw-In Connectors	97
Insulated FMC Screw-In Connectors	97
FMC Screw-In Couplings	97
AC & MC Connectors	98-101
AC Connectors	98
Low Profile Saddle Bite Connectors	98
Duplex Saddle Bite Connectors	98
Saddle Type Connectors	99
Strap Type Multi-Purpose Connectors	99
Single Screw, Saddle Type Connectors	100
Steel Connectors	101
Duplex Connectors	102-105
Single Screw BX Connectors - Steel	102
Single Screw BX Connectors - Zinc	102
2 Screw Clamp Type Duplex Connectors	103

90 Degree Duplex Connectors	103
Take-all Connectors	104
BX Connectors	105
BX One Hole Strap	105
Flexible Conduit	106-107
Reduced Wall - Steel	106
Reduced Wall - Aluminum	107

Section Eleven **NM CABLE FITTINGS** **108-109**

Two-Screw NM & SE Connectors	108
Two Screw NM & SEU Connectors	108
PVC Snap-In Connectors	109
Quick-Lock Connectors	109

Section Twelve **CORD GRIP** **110**

Steel Cord Grips	110
------------------	-----

Section Thirteen **WEATHERPROOF** **111-122**

AnyCover™	111
Metal While-In-Use Cover	112
Weatherproof Box Covers	113
Flat Device Covers	113
Duplex Horizontal	114
Toggle Switch Covers	114
Flat Device Covers - 1 Gang	114
Flat Device Covers - 2 Gang	115
Round Lamp Holder Covers	115
Rectangle Lamp Holder Covers	115
Single-Gang Weatherproof Box	116-117
3 Hole	116
4 Hole	116
5 Hole	116
5 Hole	117
Double-Gang Weatherproof Box	117-119
3 Hole	117
4 Hole	117
5 Hole	118
5 Hole	118
6 Hole	118
7 Hole	119
7 Hole	119

Single-Gang Deep Weatherproof Box	119-120
3 Hole	119
5 Hole	120
Double-Gang Deep Weatherproof Box	120
Triple-Gang Deep Weatherproof Box	120
Extension Rings-Blank	121
Extension Flanges - 4 Gang	121
Extension Flanges - 6 Gang	121
Round Boxes	122
Round Extension Boxes	122
Clousure Plugs	122

Section Fourteen ***SERVICE ENTRANCE*** **123-126**

Service Entrance Caps	123-124
Clamp On Type SEC	123
Clamp On Type CEC	124
Roof Flashing	125
Wedge Grip Clamps	125
Service Entrance Elbows-SLB	126

Section Fifteen ***ACCESSORIES GROUNDING*** **127-128**

Universal Snap-in Bushing	127
Aluminum lay-in lugs	127
Aluminum thru-in Lug	128
Double Thru-in Lug	128

EMT - Electrical Metallic Tubing



Features & Benefits:

- **Consistent Quality** – East Electrical EMT Conduit is manufactured for long life, durability and strength, and is suitable for bending. The steel is welded to ensure quality standards are met and exceeded. We do not have any trouble with welds split or wrinkle from severe bending caused by improper raw materials or poor quality control during pipe welding. The product is easy to cut, form and join.
- **Excellent ID smoothness** – During the manufacturing process we remove all ID residual flash and place a protective coating over the galvanizing to providing a much longer life cycle and excellent smoothness. This then ensures more wire capacity, and less friction between wall to wire during pulls.
- **Lower Life-cycle costs** – Our EMT Conduit resists cracking, flaking, peeling, impact, and damage from severe bending. Its physical and mechanical properties ensure that the pipe has an extended life cycle, great for usage or storage without trouble in quality.
- **Protection from Environmental Damage and Mechanical Use** – the thorough inside and outside zinc coating of East Electrical Conduit provides enhanced, second to none corrosion protection.

CAT #	TRADE SIZE IN	NOM O.D. IN	WALL THICKNESS IN	BUNDLE QTY FT	WEIGHT /100 FT LBS	PACKAGE INFORMATION			
						LIFT QUANTITY		LIFT WT	
						PCS	BD'S	FT	LBS
EMT50	1/2"	0.706	0.042	100	30		70	7000	2083
EMT75	3/4"	0.922	0.049	100	46		50	5000	2282
EMT100	1"	1.163	0.057	100	67		30	3000	2024
EMT125	1 1/4"	1.510	0.065	50	101		40	2000	2011
EMT150	1 1/2"	1.740	0.065	50	116		30	1500	1746
EMT200	2"	2.197	0.065	30	148		40	1200	1777
EMT250	2 1/2"	2.875	0.072		216	61		610	1316
EMT300	3"	3.500	0.072		265	51		510	1349
EMT350	3 1/2"	4.000	0.083		348	37		370	1290
EMT400	4"	4.500	0.083		392	30		300	1177



Certifications:

UL797
ANSI® C80.3
Federal Specification WW-C-563



IMC - Intermediate Metal Conduit

Features & Benefits:



- **Consistent Quality** – East Electrical IMC Conduit is manufactured for long life; durability, and strength, and it is suitable for bending. The conduit is produced to ensure quality standards are strictly met and/or exceed. The product is easy to cut, bend and join on the job.
- **Excellent ID Smoothness** – Our IMC conduit has had any ID flash produced during manufacturing removed and a protective coating is added over the galvanizing to ensure a longer life cycle and excellent ID smoothness.
- **Lower Life-cycle costs** – East Electrical IMC Conduit resists cracking, flaking, peeling, impact, and damage from severe bending. Its physical and mechanical properties ensure that the pipe has an extended life cycle, great for usage or storage without trouble in quality.
- **Protection from Environmental Damage and Mechanical Use** – the thorough inside and outside zinc coating of East Electrical Conduit provides enhanced, second to none corrosion protection.

CAT #	TRADE SIZE IN	NOM O.D. IN	NOM I.D. IN	WALL THICKNESS IN	WEIGHT /100 FT LBS	PACKAGE INFORMATION			
						LIFT QUANTITY			LIFT WT LBS
						PCS	BD'S	FT	
IMC50	1/2"	0.815	0.660	0.078	62	350	35	3500	2170
IMC75	3/4"	1.029	0.869	0.083	84	250	50	2500	2100
IMC100	1"	1.290	1.104	0.093	119	170	34	1700	2023
IMC125	1 1/4"	1.638	1.448	0.095	158	135		1350	2133
IMC150	1 1/2"	1.883	1.683	0.100	194	110		1100	2134
IMC200	2"	2.360	2.150	0.105	256	80		800	2048
IMC250	2 1/2"	2.857	2.557	0.150	441	37		370	1632
IMC300	3"	3.476	3.176	0.150	543	30		300	1629
IMC350	3 1/2"	3.971	3.671	0.150	629	24		240	1510
IMC400	4"	4.466	4.166	0.150	700	24		240	1680



Certifications:
 UL1242
 ANSI® C80.6
 Federal Specification WW-C-581



Rigid Metal Conduit



Features & Benefits:

- **Consistent Quality** – East Electrical Rigid metal Conduit is manufactured for long life; durability and strength, and suitable for bending. The conduit is produced to ensure quality standards are strictly met. The product is easy to cut, bend and join on the job.
- **Excellent Inner-Diameter Smoothness.**
- **Lower Life-Cycle Costs** – Our Conduit resists cracking, flaking, peeling, impact, and damage from severe bending. Its physical and mechanical properties ensure that the pipe has an extended Life Cycle.

CAT #	TRADE SIZE IN	NOM O.D. IN	NOM I.D. IN	WALL THICKNESS IN	WEIGHT /100 FT LBS	PACKAGE INFORMATION		
						LIFT QUANTITY PCS	BD'S	FT LBS
GRC50	1/2"	0.840	0.632	0.104	82	25	2500	2050
GRC75	3/4"	1.050	0.836	0.107	109	40	2000	2178
GRC100	1"	1.315	1.063	0.126	161	25	1250	2013
GRC125	1 1/4"	1.660	1.394	0.133	218	90	900	1962
GRC150	1 1/2"	1.900	1.624	0.138	163	80	800	2099
GRC200	2"	2.375	2.083	0.146	350	60	600	2103
GRC250	2 1/2"	2.875	2.489	0.193	559	37	370	2072
GRC300	3"	3.500	3.090	0.205	727	30	300	2183
GRC350	3 1/2"	4.000	3.570	0.215	880	25	250	2200
GRC400	4"	4.500	4.050	0.225	1030	20	200	2059
GRC500	5"	5.563	5.073	0.245	1400	15	150	2101
GRC600	6"	6.625	6.093	0.266	1840	10	100	1841



Certifications:
UL6
ANSI® C80.1
Federal Specification WW-C-581



Flexible Metal Conduit



Features & Benefits:

- Corrosion Resistant
- Smooth interior for easy wire pull through
- Easy to follow contours
- Crush resistant Solid wood reel attached with nylon threaded bolts
- RWS - Steel Construction
- RWA - Aluminum construction



Steel

CAT#	TRADE SIZE	UNIT CTN	OUTSIDE DIAMETER		INSIDE DIAMETER		WT /100 ft LBS	PACKAGE INFORMATION	
	IN		MIN IN	MAX IN	MIN IN	MAX IN		MASTER CASE	WT LBS
RWS-38100	3/8"	COIL	.555	.571	.374	.376	15.9	100'	15.9
RWS-50100	1/2"	COIL	.850	.866	.618	.634	16	100'	16
RWS-50500	1/2"	REEL	.850	.866	.618	.634	16	500'	80
RWS-501000	1/2"	REEL	.850	.866	.618	.634	16	1000'	160
RWS-50100UL	1/2"	COIL	.850	.866	.618	.634	16	100'	16
RWS-75100	3/4"	COIL	1.043	1.063	.827	.846	16	100'	16
RWS-75300	3/4"	REEL	1.043	1.063	.827	.846	16	300'	48
RWS-75500	3/4"	REEL	1.043	1.063	.827	.846	16	500'	80
RWS-75100UL	3/4"	COIL	1.043	1.063	.827	.846	16	100'	16
RWS-751000UL	3/4"	REEL	1.043	1.063	.827	.846	16	1000'	160
RWS-100100	1"	COIL	1.280	1.299	1.039	1.059	50	100'	50
RWS-100200	1"	REEL	1.280	1.299	1.039	1.059	50	200'	100
RWS-100300	1"	REEL	1.280	1.299	1.039	1.059	50	300'	150
RWS-10050UL	1"	COIL	1.280	1.299	1.039	1.059	50	50'	25
RWS-12550	1 1/4"	COIL	1.512	1.535	1.319	1.343	52	50'	26
RWS-125200	1 1/2"	REEL	1.827	1.850	1.496	1.520	63	200'	126
RWS-15050	1 1/2"	COIL	1.827	1.850	1.496	1.520	63	150'	95
RWS-150100	1 1/2"	REEL	1.827	1.850	1.496	1.520	63	50'	32
RWS-20025	2"	COIL	2.335	2.362	2.047	2.075	81	25'	21
RWS-200100	2"	REEL	2.335	2.362	2.047	2.075	81	100'	81
RWS-25025	2 1/2"	COIL						25'	
RWS-30025	3"	COIL						25'	
RWS-35025	3 1/2"	COIL						25'	
RWS-40025	4"	COIL						25'	


Aluminum



CAT#	TRADE SIZE	UNIT CTN	OUTSIDE DIAMETER		INSIDE DIAMETER		WT /100 ft LBS	PACKAGE INFORMATION	
	IN		MIN IN	MAX IN	MIN IN	MAX IN		MASTER CASE	WT LBS
RWA-38100	3/8"	COIL	0.560	0.610	0.375	0.393	7	100'	7
RWA-38250	3/8"	REEL	0.560	0.610	0.375	0.393	7	250'	17.5
RWA-50100	1/2"	COIL	0.860	0.920	0.625	0.645	9.4	100'	9.4
RWA-501000	1/2"	REEL	0.860	0.920	0.625	0.645	9.4	1000'	94
RWA-75100	3/4"	COIL	1.045	1.105	0.812	0.835	12.5	100'	12.5
RWA-75500	3/4"	REEL	1.045	1.105	0.812	0.835	12.5	500'	62.5
RWA-10050	1"	COIL	1.300	1.380	1.000	1.040	19.6	50'	9.8
RWA-100300	1"	REEL	1.300	1.380	1.000	1.040	19.6	300'	58.8
RWA-12550	1 1/4"	COIL	1.550	1.630	1.250	1.300	23.9	50'	11.95
RWA-125200	1 1/2"	REEL	1.850	1.950	1.500	1.575	31.1	200'	62.2
RWA-15025	1 1/2"	COIL	1.850	1.950	1.500	1.575	31.1	25'	7.8
RWA-150100	1 1/2"	REEL	1.850	1.950	1.500	1.575	31.1	100'	31.1
RWA-20025	2"	COIL	2.350	2.450	2.000	1.080	40.2	25'	10
RWA-200100	2"	REEL	2.350	2.450	2.000	1.080	40.2	100'	40.2
RWA-25025	2 1/2"	COIL	2.860	3.060			65.6	25'	16.4
RWA-30025	3"	COIL	3.360	6.560			67.5	25'	16.9
RWA-35025	3 1/2"	COIL	3.860	4.060			76.0	25'	19
RWA-40025	4"	COIL					77.3	25'	19.4

EMT Elbows

90° EMT Elbow

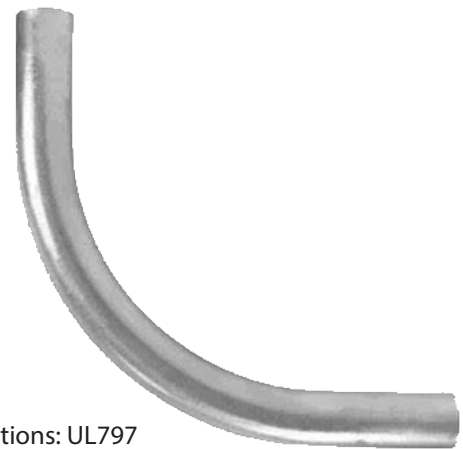


Features & Benefits:

- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East EMT Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 4"



Certifications: UL797

CAT#	TRADE SIZE	MINIMUM UL RADIUS	ST LEG EA END	WT /100pcs	PKG INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT CASE
012EE90	1/2" x 90°	4.0	1.67	24		50	12
034EE90	3/4" x 90°	4.5	2.17	43		50	22
100EE90	1" x 90°	5.75	2.36	77		20	16
125EE90	1 1/4" x 90°	7.25	2.76	142		20	29
150EE90	1 1/2" x 90°	8.25	3.15	187		10	19
200EE90	2" x 90°	9.5	4.25	272		10	27
250EE90	2 1/2" x 90°	10.5	5.24	467		50	234
300EE90	3" x 90°	13	5.87	685		35	240
350EE90	3 1/2" x 90°	15	6.10	1039		35	364
400EE90	4" x 90°	16	7.13	1248		25	312



45° EMT Elbow




Features & Benefits:

- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East EMT Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 4"



Certifications: UL797

CAT#	TRADE SIZE	MINIMUM UL RADIUS	ST LEG EA END	WT 100pcs	PKG INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT CASE
012EE45	1/2" x 45°	4	1.89	17		50	9
034EE45	3/4" x 45°	4.5	2.13	29		50	15
100EE45	1" x 45°	5.75	2.28	51		35	18
125EE45	1 1/4" x 45°	7.25	2.76	94		30	28
150EE45	1 1/2" x 45°	8.25	3.27	126		15	19
200EE45	2" x 45°	9.5	3.94	189		15	29
250EE45	2 1/2" x 45°	10.5	4.53	311		50	156
300EE45	3" x 45°	13	5.91	486		40	195
350EE45	3 1/2" x 45°	15	7.09	754		35	216
400EE45	4" x 45°	16	7.87	926		35	324

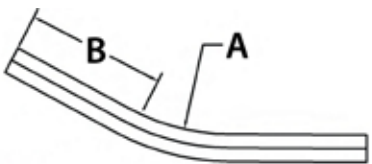

EMT Elbows

30° EMT Elbow




Features & Benefits:

- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East EMT Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 4"



Certifications: UL797

CAT#	TRADE SIZE IN	MINIMUM UL RADIUS IN	ST LEG EA END IN	WT 100pcs LBS	PKG INFORMATION		
					INNER CASE	MASTER CASE	WT CASE
012EE30	1/2" x 30°	4	1.89	14		50	7
034EE30	3/4" x 30°	4.5	2.13	25		50	13
100EE30	1" x 30°	5.75	2.28	42		35	15
125EE30	1 1/4" x 30°	7.25	2.76	78		30	24
150EE30	1 1/2" x 30°	8.25	3.25	105		15	16
200EE30	2" x 30°	9.5	4.29	158		15	24
250EE30	2 1/2" x 30°	10.5	5.12	262		50	131
300EE30	3" x 30°	13	6.14	410		40	164
350EE30	3 1/2" x 30°	15	7.09	639		35	224
400EE30	4" x 30°	16	7.09	788		35	276

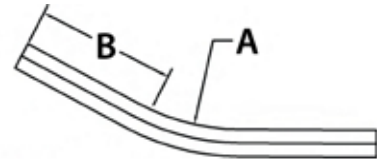

22.5° EMT Elbow




Features & Benefits:

- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East EMT Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 4"



Certifications: UL797

CAT#	TRADE SIZE IN	MINIMUM UL RADIUS IN	ST LEG EA END IN	WT 100pcs LBS	PKG INFORMATION		
					INNER CASE	MASTER CASE	WT CASE
012EE225	1/2" x 22.5°	4.00	1.87	13		50	7
034EE225	3/4" x 22.5°	4.50	2.11	23		50	12
100EE225	1" x 22.5°	5.75	2.26	38		35	13
125EE225	1 1/4" x 22.5°	7.25	2.76	70		30	21
150EE225	1 1/2" x 22.5°	8.25	3.25	94		15	14
200EE225	2" x 22.5°	9.50	4.29	143		10	15
250EE225	2 1/2" x 22.5°	10.50	5.12	237	1	50	119
300EE225	3" x 22.5°	13.00	6.14	373	1	40	149
350EE225	3 1/2" x 22.5°	15.00	6.73	582	1	35	204
400EE225	4" x 22.5°	16.00	7.09	720	1	35	252

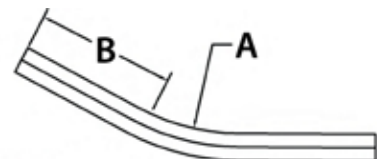

EMT Elbows

15° EMT Elbow




Features & Benefits:

- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East EMT Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 4"

Certifications: UL797



CAT#	TRADE SIZE	MINIMUM UL RADIUS	ST LEG EA END	WT 100pcs	PKG INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT CASE
012EE15	1/2" x 15°	4	1.89	12		50	6
034EE15	3/4" x 15°	4.5	2.13	20		50	10
100EE15	1" x 15°	5.75	2.28	34		35	12
125EE15	1 1/4" x 15°	7.25	2.76	62		30	19
150EE15	1 1/2" x 15°	8.27	3.27	84		15	13
200EE15	2" x 15°	9.5	4.29	128		15	19
250EE15	2 1/2" x 15°	10.5	5.12	212		50	106
300EE15	3" x 15°	13	6.14	335		40	134
350EE15	3 1/2" x 15°	15	6.73	525		35	184
400EE15	4" x 15°	16	7.09	651		35	228

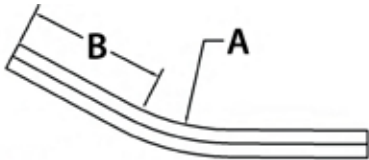

Rigid Steel Elbows

90° Rigid Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6"

Certifications: UL6



CAT#	TRADE SIZE	MINIMUM UL RADIUS	ST LEG EA END	WT 100pcs	PKG INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT CASE
012RE90	1/2" x 90°	4	1.67	66		50	33
034RE90	3/4" x 90°	4.5	2.17	104		50	52
100RE90	1" x 90°	5.75	2.36	185		20	37
125RE90	1 1/4" x 90°	7.25	2.76	307		20	62
150RE90	1 1/2" x 90	8.25	3.15	421		10	42
200RE90	2" x 90°	9.5	4.25	644		10	65
250RE90	2 1/2" x 90°	10.5	5.24	1212	1	50	606
300RE90	3" x 90°	13	5.87	1884	1	35	660
350RE90	3 1/2" x 90°	15	6.73	2624	1	35	919
400RE90	4" x 90°	16	7.13	3274	1	25	819
500RE90	5" x 90°	24	11.14	6997	1	1	70
600RE90	6" X 90°	30	13.27	11286	1	1	113

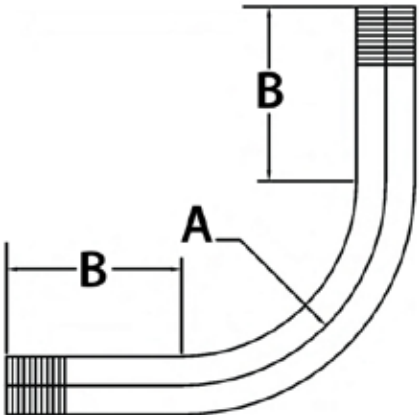

Rigid Steel Elbows

45° Rigid Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6"



Certifications: UL6

CAT#	TRADE SIZE IN	MINIMUM UL RADIUS IN	ST LEG EA END IN	WT 100pcs LBS	PKG INFORMATION		
					INNER CASE	MASTER CASE	WT CASE
012RE45	1/2" x 45°	4	1.87	48		50	24
034RE45	3/4" x 45°	4.5	2.11	70		50	35
100RE45	1" x 45°	5.75	2.26	120		35	42
125RE45	1 1/4" x 45°	7.25	2.76	203		30	61
150RE45	1 1/2" x 45°	8.25	3.25	286		15	43
200RE45	2" x 45°	9.5	4.29	446		15	67
250RE45	2 1/2" x 45°	10.5	5.12	808	1	50	404
300RE45	3" x 45°	13	6.14	1325	1	40	530
350RE45	3 1/2" x 45°	15	7.09	1903	1	35	676
400RE45	4" x 45°	16	7.87	2430	1	35	851
500RE45	5" x 45°	24	11.06	4777	1	1	48
600RE45	6" x 45°	30	12.72	7509	1	1	75

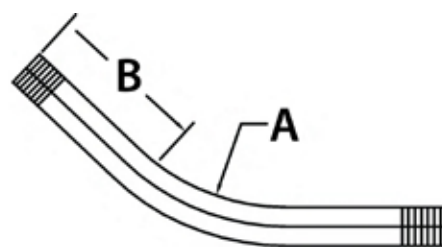

30° Rigid Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6"



Certifications: UL6

CAT#	TRADE SIZE IN	MINIMUM UL RADIUS IN	ST LEG EA END IN	WT 100pcs LBS	PKG INFORMATION		
					INNER CASE	MASTER CASE	WT CASE
012RE30	1/2" x 30°	4.0	1.89	40		50	20
034RE30	3/4" x 30°	4.5	2.11	60		50	30
100RE30	1" x 30°	5.75	2.26	101		35	36
125RE30	1 1/4" x 30°	7.25	2.76	169		30	51
150RE30	1 1/2" x 30°	8.25	3.25	236		15	36
200RE30	2" x 30°	9.5	4.29	375		15	57
250RE30	2 1/2" x 30°	10.5	5.12	679	1	50	340
300RE30	3" x 30°	13	6.14	1128	1	40	452
350RE30	3 1/2" x 30°	15	7.09	1613	1	35	565
400RE30	4" x 30°	16	7.87	2067	1	35	724
500RE30	5" x 30°	24	11.06	4054	1	25	1014
600RE30	6" x 30°	30	12.72	6282	1	25	1571

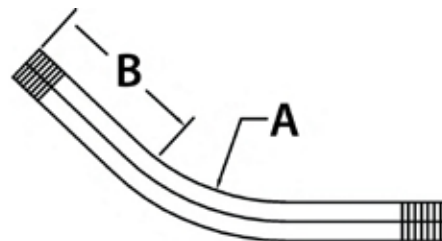

Rigid Steel Elbows

22.5° Rigid Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6"



Certifications: UL6

CAT#	TRADE SIZE IN	MINIMUM UL RADIUS IN	ST LEG EA END IN	WT 100pcs LBS	PKG INFORMATION		
					INNER CASE	MASTER CASE	WT CASE
012RE225	1/2" x 22.5°	4	1.90	36	50	18	
034RE225	3/4" x 22.5°	4.5	2.13	54	50	27	
100RE225	1" x 22.5°	5.75	2.28	91	35	42	
125RE225	1 1/4" x 22.5°	7.25	2.76	152	30	46	
150RE225	1 1/2" x 22.5°	8.27	3.27	213	15	32	
200RE225	2" x 22.5°	9.5	4.29	339	10	34	
250RE225	2 1/2" x 22.5°	10.5	4.53	615	50	308	
300RE225	3" x 22.5°	13	5.91	1025	35	359	
350RE225	3 1/2" x 22.5°	15	7.09	1470	35	515	
400RE225	4" x 22.5°	16	7.87	1888	35	661	
500RE225	5" x 22.5°	24	11.06	3678	25	920	
600RE225	6" x 22.5°	30	12.72	5668	25	1417	

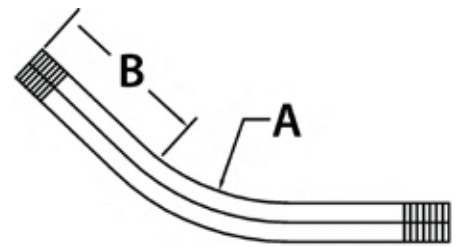

15° Rigid Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6"



Certifications: UL6

CAT#	TRADE SIZE IN	MINIMUM UL RADIUS IN	ST LEG EA END IN	WT 100pcs LBS	PKG INFORMATION		
					INNER CASE	MASTER CASE	WT CASE
012RE15	1/2" x 15°	4	1.89	33	50	17	
034RE15	3/4" x 15°	4.5	2.13	49	50	25	
100RE15	1" x 15°	5.75	2.28	81	35	29	
125RE15	1 1/4" x 15°	7.25	2.76	134	30	41	
150RE15	1 1/2" x 15°	8.25	3.27	189	15	29	
200RE15	2" x 15°	9.5	3.94	302	10	31	
250RE15	2 1/2" x 15°	10.5	4.53	551	50	276	
300RE15	3" x 15°	13	6.14	922	35	323	
350RE15	3 1/2" x 15°	15	7.09	1326	35	464	
400RE15	4" x 15°	16	7.87	1709	35	598	
500RE15	5" x 15°	24	11.06	3294	25	824	
600RE15	6" x 15°	30	12.72	5066	25	1267	

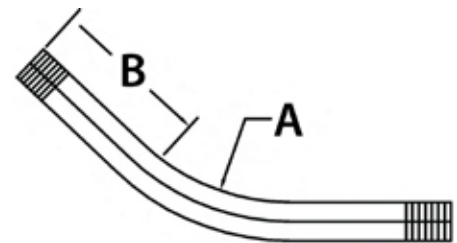

Rigid Steel Special Radius Elbows

2" Rigid *Special Radius* Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 2" to 6"

Certifications: UL6

CAT #	TRADE SIZE IN	BEND RADIUS IN	WT 100 PCS LBS	PKG INFORMATION	
				CASE QTY	WT CASE
200RE45X24	2" x 45°	24	1185	1	11.85
200RE45X36	2" x 45°	36	1458	1	14.58
200RE45X48	2" x 45°	48	1790	1	17.90
200RE90X24	2" x 90°	24	1731	1	17.31
200RE90X36	2" x 90°	36	2290	1	22.90
200RE90X48	2" x 90°	48	2882	1	28.82

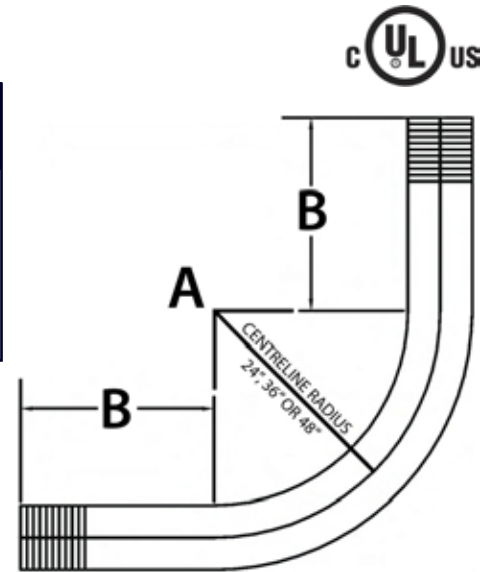

2 1/2" Rigid *Special Radius* Elbows




Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 2" to 6"

Certifications: UL6

CAT #	TRADE SIZE IN	BEND RADIUS IN	WT 100 PCS LBS	PKG INFORMATION	
				CASE QTY	WT CASE
250RE45X24	2 1/2" x 45°	24	1882	1	18.82
250RE45X36	2 1/2" x 45°	36	2318	1	23.18
250RE45X48	2 1/2" x 45°	48	2844	1	28.44
250RE90X24	2 1/2" x 90°	24	2751	1	27.51
250RE90X36	2 1/2" x 90°	36	3619	1	36.19
250RE90X48	2 1/2" x 90°	48	4581	1	45.81

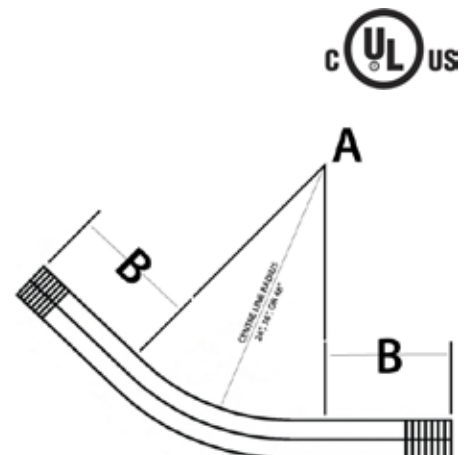

Rigid Steel Special Radius Elbows

3" Rigid Special Radius Elbows




Certifications: UL6

CAT #	TRADE SIZE IN	BEND RADIUS IN	WT 100 PCS LBS	PKG INFORMATION	
				CASE QTY	WT CASE
300RE45X24	3" x 45°	24	2458	1	24.58
300RE45X36	3" x 45°	36	3027	1	30.27
300RE45X48	3" x 45°	48	3714	1	37.14
300RE90X24	3" x 90°	24	3594	1	35.94
300RE90X36	3" x 90°	36	4727	1	47.27
300RE90X48	3" x 90°	48	5983	1	59.83

Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 2" to 6"

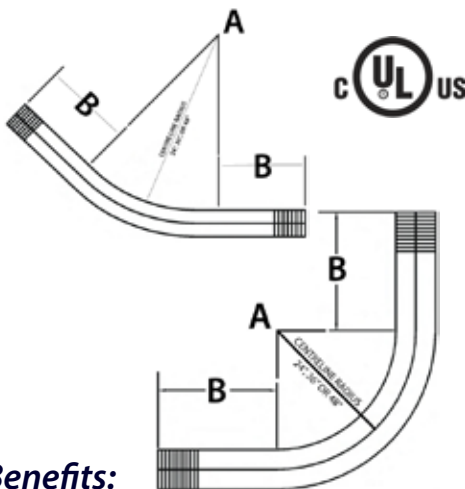

4" Rigid Special Radius Elbows




Certifications: UL6

CAT #	TRADE SIZE IN	BEND RADIUS IN	WT 100 PCS LBS	PKG INFORMATION	
				CASE QTY	WT CASE
400RE45X24	4" x 45°	24	3502	1	35.02
400RE45X36	4" x 45°	36	4312	1	43.12
400RE45X48	4" x 45°	48	5291	1	52.91
400RE90X24	4" x 90°	24	5119	1	51.19
400RE90X36	4" x 90°	36	6733	1	67.33
400RE90X48	4" x 90°	48	8523	1	85.23


Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 2" to 6"

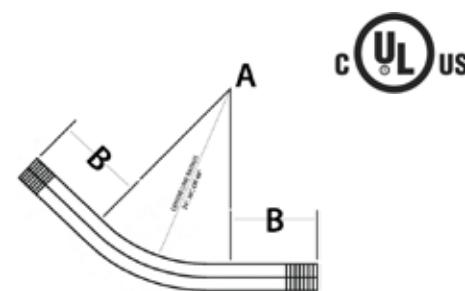

5" and 6" Rigid Special Radius Elbows

CAT #	TRADE SIZE IN	BEND RADIUS IN	WT 100 PCS LBS	PKG INFORMATION	
				CASE QTY	WT CASE
500RE90X36	5" x 90°	36	9110	1	91.10
500RE90X48	5" x 90°	48	11528	1	115.28
600RE90X36	6" x 90°	36	11839	1	118.39
600RE90X48	6" x 90°	48	14981	1	149.81

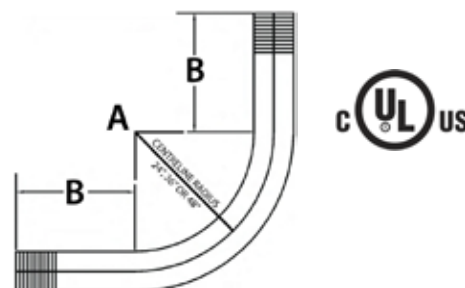

Rigid Steel Nipples

Steel



Features & Benefits:

- NPT Threads
- Smooth Interior: Facilitates easy wire pulling.
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Connectors and Couplings
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6" with multiple length options.



Certifications: UL6

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
012GRN150	1/2"	1 1/2"	8	25	600	24
012GRN200	1/2"	2"	12	25	600	72
012GRN250	1/2"	2 1/2"	15	25	400	60
012GRN300	1/2"	3"	19	25	400	76
012GRN350	1/2"	3 1/2"	22	25	300	66
012GRN400	1/2"	4"	26	25	300	78
012GRN500	1/2"	5"	33	25	200	66
012GRN600	1/2"	6"	40	25	200	80
012GRN1000	1/2"	10"	68	25	75	51
012GRN1200	1/2"	12"	82	25	75	62

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
125GRN200	1 1/4"	2"	28	25	150	42
125GRN250	1 1/4"	2 1/2"	37	25	150	56
125GRN300	1 1/4"	3"	47	25	100	47
125GRN350	1 1/4"	3 1/2"	55	25	100	55
125GRN400	1 1/4"	4"	66	25	100	66
125GRN500	1 1/4"	5"	84	25	75	63
125GRN600	1 1/4"	6"	100	25	50	50
125GRN800	1 1/4"	8"	136	15	30	41
125GRN1000	1 1/4"	10"	176	15	30	53
125GRN1200	1 1/4"	12"	216	15	30	65

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
034GRN150	3/4"	1 1/2"	10	25	400	40
034GRN200	3/4"	2"	14	25	400	56
034GRN250	3/4"	2 1/2"	19	25	300	57
034GRN300	3/4"	3"	24	25	200	45
034GRN350	3/4"	3 1/2"	28	25	150	42
034GRN400	3/4"	4"	34	25	150	51
034GRN500	3/4"	5"	43	25	100	43
034GRN600	3/4"	6"	52	25	100	52
034GRN800	3/4"	8"	73	25	75	55
034GRN1000	3/4"	10"	89	25	50	45
034GRN1200	3/4"	12"	109	25	50	55

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
150GRN200	1 1/2"	2"	34	25	75	26
150GRN250	1 1/2"	2 1/2"	44	25	75	33
150GRN300	1 1/2"	3"	56	25	100	56
150GRN350	1 1/2"	3 1/2"	68	25	50	34
150GRN400	1 1/2"	4"	80	25	50	40
150GRN500	1 1/2"	5"	103	25	50	52
150GRN600	1 1/2"	6"	122	25	50	34
150GRN800	1 1/2"	8"	170	1	10	17
150GRN1000	1 1/2"	10"	216	1	10	22
150GRN1200	1 1/2"	12"	260	1	20	52

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
100GRN200	1"	2"	22	25	200	44
100GRN250	1"	2 1/2"	28	25	200	56
100GRN300	1"	3"	36	25	150	54
100GRN350	1"	3 1/2"	43	25	100	43
100GRN400	1"	4"	49	25	100	49
100GRN500	1"	5"	64	25	100	64
100GRN600	1"	6"	78	25	75	59
100GRN800	1"	8"	109	25	75	82
100GRN1000	1"	10"	138	25	75	104
100GRN1200	1"	12"	200	1	25	50

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
200GRN250	2"	2 1/2"	59	25	50	30
200GRN300	2"	3"	72		25	18
200GRN350	2"	3 1/2"	88		40	35
200GRN400	2"	4"	103		40	41
200GRN500	2"	5"	132		40	53
200GRN600	2"	6"	160	1	25	40
200GRN700	2"	7"	190	1	20	38
200GRN800	2"	8"	220	1	10	22
200GRN1000	2"	10"	285	1	20	57
200GRN1200	2"	12"	335	1	15	50

Rigid Steel Nipples

Steel



CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
250GRN300	2 1/2"	3"	100		10	10
250GRN350	2 1/2"	3 1/2"	120	10	30	36
250GRN400	2 1/2"	4"	150	10	30	45
250GRN500	2 1/2"	5"	197	10	20	40
250GRN600	2 1/2"	6"	240	10	20	48
250GRN800	2 1/2"	8"	329	1	10	33
250GRN1000	2 1/2"	10"	422	1	10	42

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
300GRN300	3"	3"	130		20	26
300GRN350	3"	3 1/2"	157		15	24
300GRN400	3"	4"	200		15	60
300GRN500	3"	5"	260		15	78
300GRN600	3"	6"	300		10	30
300GRN800	3"	8"	411		7	29
300GRN1000	3"	10"	528		5	27
300GRN1200	3"	12"	630		5	32

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
350GRN400	3 1/2"	4"	240	1	10	24
350GRN500	3 1/2"	5"	320	1	8	26
350GRN600	3 1/2"	6"	373	1	8	30
350GRN800	3 1/2"	8"	510	1	4	21
350GRN1000	3 1/2"	10"	655	1	4	26
350GRN1200	3 1/2"	12"	785	1	4	32

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
400GRN400	4"	4"	285	1	10	29
400GRN500	4"	5"	380	1	8	31
400GRN600	4"	6"	440	1	8	35
400GRN800	4"	8"	600	1	8	48
400GRN1000	4"	10"	775	1	4	31
400GRN1200	4"	12"	925	1	4	27

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
500GRN500	5"	5"	480	1	5	24
500GRN600	5"	6"	600	1	5	30
500GRN800	5"	8"	825	1	4	33
500GRN1000	5"	10"	1055	1	3	32
500GRN1200	5"	12"	1260	1	3	38


CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
600GRN500	6"	5"	660	1	5	33
600GRN600	5"	6"	820	1	5	41
600GRN800	5"	8"	1125	1	4	45
600GRN1000	5"	10"	1440	1	3	43
600GRN1200	5"	12"	1720	1	3	52

Close Nipples




Certifications: UL6

CAT #	PIPE SIZE	PIPE LENGTH	WT 100pcs LBS	PKG INFORMATION		
				INNER CASE QTY	MASTER CASE QTY	CASE WT LBS
012CGRN	1/2"	1 1/8"	6	25	600	36
034CGRN	3/4"	1 3/8"	9	25	400	36
100CGRN	1"	1 1/2"	16	25	300	48
125CGRN	1 1/4"	1 5/8"	22	25	100	22
150CGRN	1 1/2"	1 3/4"	28	25	100	28
200CGRN	2"	2"	44	25	75	33
250CGRN	2 1/2"	2 1/2"	84	40	40	16
300CGRN	3"	2 5/8"	118	1	30	35.4
350CGRN	3 1/2"	2 3/4"	160	1	20	32
400CGRN	4"	2 7/8"	180	20	20	36
500CGRN	5"	3"	240	1	8	19.2
600CGRN	6"	3 1/8"	350	1	8	28

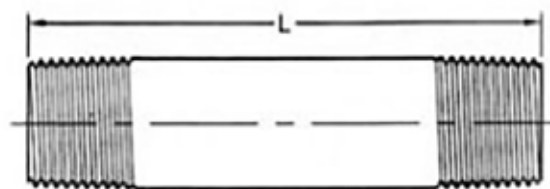


Long Nipple

Close Nipple



Short Nipple



Rigid Steel Couplings

Steel




Features & Benefits:

- NPSM Threads
- Corrosion Resistant: Coated to prevent corrosion.
- Easy Installation: Quick setup with East RIGID Conduit, Connectors
- UL Listed: Meets safety and quality standards.
- Size Range: From 1/2" to 6"

Certifications: UL6

CAT#	TRADE SIZE IN	MIN A IN	OUTSIDE B IN	WT 100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
012RC	1/2"	1.625	1.01	14	150	400	56
034RC	3/4"	1.642	1.25	20	50	300	60
100RC	1"	1.969	1.52	31	30	180	56
125RC	1 1/4"	2.032	1.87	39	25	100	39
150RC	1 1/2"	2.063	2.15	56	25	75	42
200RC	2"	2.125	2.65	73	20	60	44
250RC	2 1/2"	3.189	3.25	185		12	22
300RC	3"	3.311	3.87	226		8	18
350RC	3 1/2"	3.41	4.50	358		4	15
400RC	4"	3.516	4.87	400		4	16
500RC	5"	3.953	6.00	497		2	10
600RC	6"	4.252	7.20	816		3	25

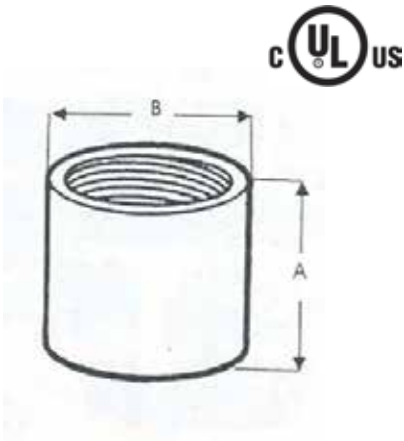

Compression Type

Compression Couplings




Features & Benefits:

- Used to join two lengths of EMT. From 2-1/2" to 4" also suitable for IMC and Rigid conduit.
- Concrete-tight.
- Compression Type
- Zinc plated steel construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B DIA	WT	PACKAGE INFORMATION		
	IN	IN	IN	/100pcs LBS	INNER CASE	MASTER CASE	WT LBS
CK-50S1	1/2"	1.09	1.86	13.20	25	250	33
CK-75S1	3/4"	1.30	1.98	15.20	25	250	38
CK-100S1	1"	1.63	2.23	24.00	10	100	24
CK-125S1	1 1/4"	2.13	2.60	40.00		25	10
CK-150S1	1 1/2"	2.37	2.86	50.00		20	10
CK-200S1	2"	2.86	2.96	66.67		15	10
CK-250S1	2 1/2"	3.59	5.12	208.34		12	25
CK-300S1	3"	4.23	5.16	250.00		6	15
CK-350S1	3 1/2"	4.70	5.36	300.00		6	18
CK-400S1	4"	5.26	5.58	350.00		6	21



Raintight Compression Couplings




Features & Benefits:

- Used to join two lengths of EMT.
- Hex gland nut creates a flat smooth surface for convenient wrenching
- Interior shoulder conduit stop, offers positive seating of the conduit inside the body.
- Zinc plated steel construction with Thermoplastic sealing rings.
- Concrete-tight/Rain-tight..



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B DIA	WT	PACKAGE INFORMATION		
	IN	IN	IN	/100pcs LBS	INNER CASE	MASTER CASE	WT LBS
CK-50RTS1	1/2"	1.09	1.86	14.11	25	250	36
CK-75RTS1	3/4"	1.30	1.98	18.08	25	250	46
CK-100RTS1	1"	1.63	2.23	30.86	10	100	31
CK-125RTS1	1 1/4"	2.13	2.60	57.32		25	15
CK-150RTS1	1 1/2"	2.37	2.86	66.14		20	14
CK-200RTS1	2"	2.86	2.96	88.18		15	14
CK-250RTS1	2 1/2"	3.59	5.12	192.90		12	24
CK-300RTS1	3"	4.23	5.16	275.58		6	17
CK-350RTS1	3 1/2"	4.70	5.36	440.92		5	16
CK-400RTS1	4"	5.26	5.58	275.58		6	19



Compression Type

Compression Connectors




Features & Benefits:

- Used to join EMT to a box or enclosure. From 2-1/2" to 4" also suitable for IMC and Rigid conduit.
- Compression Type
- Concrete Tight
- Male hub threads - NPSM
- Zinc Plated Steel Construction.



Certifications: UL-514B

CAT#	TRADE	A	B	WT	PACKAGE INFORMATION		
	SIZE IN	LENGTH IN	DIA IN	/100pcs LBS	INNER CASE	MASTER CASE	WT LBS
CC-50S1	1/2"	1.09	1.86	10.00	25	250	25
CC-75S1	3/4"	1.30	1.98	12.80	25	250	32
CC-100S1	1"	1.63	2.23	22.00	10	100	22
CC-125S1	1 1/4"	2.13	2.60	36.00		25	9
CC-150S1	1 1/2"	2.37	2.86	45.00		20	9
CC-200S1	2"	2.86	2.96	60.01		15	9
CC-250S1	2 1/2"	3.59	5.12	158.34		12	19
CC-300S1	3"	4.23	5.16	183.34		12	22
CC-350S1	3 1/2"	4.70	5.36	233.34		6	14
CC-400S1	4"	5.26	5.58	266.67		6	16

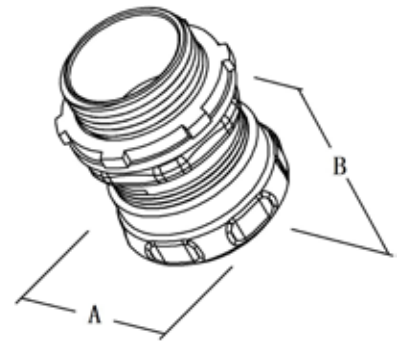

Insulated Compression Connectors




Features & Benefits:

- Used to join EMT to a box or enclosure. From 2-1/2" to 4" also suitable for IMC and Rigid conduit.
- Compression Type
- Concrete Tight
- Male hub threads - NPSM
- Zinc Plated Steel Construction with Hi-Performance Thermoplastic insulator



Certifications: UL-514B

CAT#	TRADE	A	B	WT	PACKAGE INFORMATION		
	SIZE IN	LENGTH IN	DIA IN	/100pcs LBS	INNER CASE	MASTER CASE	WT LBS
CCI-50S1	1/2"	1.09	1.51	10.00	25	250	25
CCI-75S1	3/4"	1.30	1.64	12.80	25	250	32
CCI-100S1	1"	1.63	1.95	22.00	10	100	22
CCI-125S1	1 1/4"	2.13	2.38	32.00		25	9
CCI-150S1	1 1/2"	2.37	2.41	45.00		20	9
CCI-200S1	2"	2.86	2.62	60.14		15	9
CCI-250S1	2 1/2"	3.59	4.06	158.34		12	19
CCI-300S1	3"	4.23	4.23	183.34		12	22
CCI-350S1	3 1/2"	4.70	4.61	233.34		6	14
CCI-400S1	4"	5.26	4.67	266.67		6	16

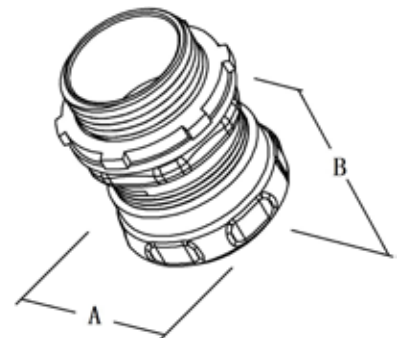

Compression Type

Raintight Compression Connectors




Features & Benefits:

- Assembled with sealing ring and knockout gasket, Compression style connector can provide a rain tight seal when connecting EMT to a box or enclosure.
- Hex gland nut creates a flat smooth surface for convenient wrenching
- Interior shoulder conduit stop, offers positive seating of the conduit inside the body.
- Zinc plated steel construction with Thermoplastic sealing rings.
- Angled teeth on the locknut securely bite into enclosure
- Concrete-tight/Rain-tight..



Certifications: UL-514B

CAT#	TRADE SIZE IN	MIN A IN	OUTSIDE B IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
CC-50RTS1	1/2"	1.09	1.51	10.42	25	250	26.05
CC-75RTS1	3/4"	1.30	1.64	13.94	25	250	34.85
CC-100RTS1	1"	1.63	1.98	22.55	10	100	22.55
CC-125RTS1	1 1/4"	2.13	2.38	39.16		25	9.79
CC-150RTS1	1 1/2"	2.37	2.41	60.63		20	9.70
CC-200RTS1	2"	2.86	2.62	62.20		15	9.33
CC-250RTS1	2 1/2"	3.59	4.06	146.97		12	17.64
CC-300RTS1	3"	4.23	4.23	207.34		12	24.88
CC-350RTS1	3 1/2"	4.77	4.61	275.00		5	13.75
CC-400RTS1	4"	5.26	4.67	352.74		3	10.58

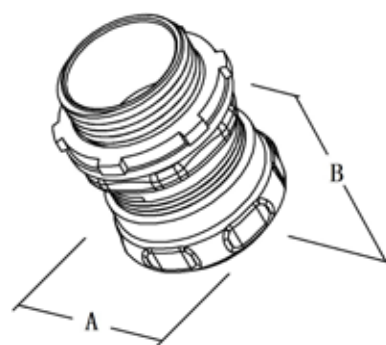

Insulated Raintight Compression Connectors




Features & Benefits:

- Assembled with sealing ring and knockout gasket, Compression style connector can provide a rain tight seal when connecting EMT to a box or enclosure.
- Hex gland nut creates a flat smooth surface for convenient wrenching
- Interior shoulder conduit stop, offers positive seating of the conduit inside the body.
- Zinc plated steel construction with Thermoplastic sealing rings.
- Angled teeth on the locknut securely bite into enclosure
- Concrete-tight/Rain-tight.
- Insulated throat.



Certifications: UL-514B

CAT#	TRADE SIZE IN	MIN A IN	OUTSIDE B IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
CCI-50RTS1	1/2"	1.09	1.51	10.86	25	250	27.16
CCI-75RTS1	3/4"	1.30	1.64	14.76	25	250	36.91
CCI-100RTS1	1"	1.63	1.98	24.54	10	100	24.54
CCI-125RTS1	1 1/4"	2.13	2.38	39.84		25	9.96
CCI-150RTS1	1 1/2"	2.37	2.41	60.63		20	9.70
CCI-200RTS1	2"	2.86	2.62	64.27		15	9.64
CCI-250RTS1	2 1/2"	3.59	4.06	171.34		12	20.56
CCI-300RTS1	3"	4.23	4.23	218.67		6	13.12
CCI-350RTS1	3 1/2"	4.77	4.61	277.00		5	13.85
CCI-400RTS1	4"	5.26	4.67	352.74		3	10.58

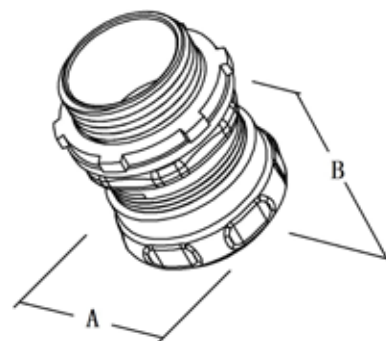

Set-Screw Type

Set Screw Couplings




Features & Benefits:

- Used to join two lengths of EMT. From 2-1/2" to 4" also suitable for IMC and Rigid conduit.
- Concrete-tight when taped
- Zinc plated steel construction.

Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
SK-50S1	1/2"	1.750	0.88	8.73	50	500	40
SK-75S1	3/4"	2.125	1.06	10.58	25	250	27
SK-100S1	1"	2.500	1.31	22.00	10	100	22
SK-125S1	1 1/4"	3.250	1.69	36.01		25	9
SK-150S1	1 1/2"	3.750	1.94	44.00		25	11
SK-200S1	2"	4.000	2.38	55.00		20	11
SK-250S1	2 1/2"	4.250	3.19	125.00		12	15
SK-300S1	3"	4.500	3.19	158.34		12	19
SK-350S1	3 1/2"	4.750	4.31	200.00		6	12
SK-400S1	4"	5.000	4.81	233.34		6	14

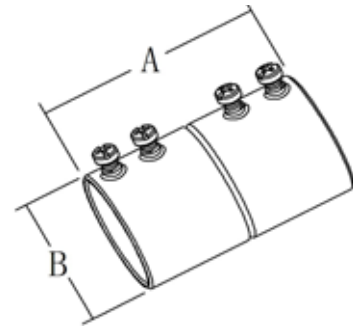

Set-Screw Connectors




Features & Benefits:

- Used to join EMT to a box or enclosure. From 2-1/2" to 4" also suitable for IMC and Rigid conduit.
- Concrete-tight when taped.
- Male hub threads - NPSM
- Zinc plated steel construction.

Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B LENGTH IN	C DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
SC-50S1	1/2"	1.531	.438	1.313	8.69	50	500	44
SC-75S1	3/4"	1.625	.469	1.563	11.99	25	250	30
SC-100S1	1"	2.250	.563	1.938	18.99	20	200	38
SC-125S1	1 1/4"	2.500	.563	2.250	32.00		25	8
SC-150S1	1 1/2"	2.750	.563	2.750	36.00		25	9
SC-200S1	2"	3.313	.750	3.563	45.00		20	9
SC-250S1	2 1/2"	3.813	.938	4.188	125.00		12	15
SC-300S1	3"	3.938	.938	4.688	166.67		12	20
SC-350S1	3 1/2"	4.188	1.000	5.188	193.12		6	12
SC-400S1	4"	3.750	1.050	4.990	233.34		6	14

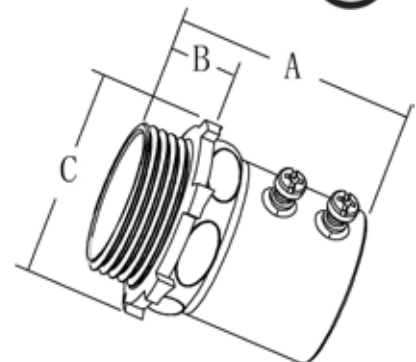

Set-Screw Type

Insulated Set-Screw Connectors




Features & Benefits:

- Used to join EMT to a box or enclosure. From 2-1/2" to 4" also suitable for IMC and Rigid conduit.
- Concrete-tight when taped.
- Male hub threads - NPSM
- Zinc plated steel construction.
- Hi-Performance thermoplastic insulator.



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B LENGTH	C DIA	WT	PACKAGE INFORMATION		
	IN	IN	IN	IN	/100pcs LBS	INNER CASE	MASTER CASE	WT LBS
SCI-50S1	1/2"	1.531	.438	1.313	8.73	50	500	43.65
SCI-75S1	3/4"	1.625	.469	1.563	11.46	25	250	28.65
SCI-100S1	1"	2.250	.563	1.938	20.12	20	200	40.24
SCI-125S1	1 1/4"	2.500	.563	2.250	36.84		25	9.21
SCI-150S1	1 1/2"	2.750	.563	2.750	38.96		25	9.74
SCI-200S1	2"	3.313	.750	3.563	48.20		20	9.64
SCI-250S1	2 1/2"	3.813	.938	4.188	131.25		12	15.75
SCI-300S1	3"	3.938	.938	4.688	170.08		12	20.41
SCI-350S1	3 1/2"	4.188	1.000	5.188	203.33		6	12.20
SCI-400S1	4"	3.750	1.050	4.990	237.84		6	14.27

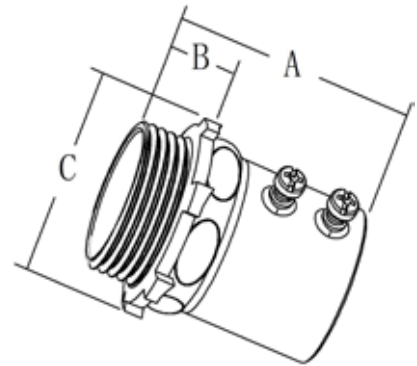

Compression Connector



Insulated Set-Screw Connector



EMT Slip Couplings




Features & Benefits:

- Ideal for EMT overhead racks in solar application
- Diamond Inspection Window to ensure EMT/Rigid installed in proper position
- Allow EMT adjustment for perfect fit Suitable for prefab
- Steel, Zinc Plated

Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
SLPK-50S	1/2"	0.87	1.75	9.8	50	500	49.2
SLPK-75S	3/4"	1.06	1.88	12.2	25	250	30.4
SLPK-100S	1"	1.33	2.06	20.7	10	100	20.7
SLPK-125S	1 1/4"	1.72	2.49	33.6		25	8.4
SLPK-150S	1 1/2"	1.95	2.88	43.2		25	10.8
SLPK-200S	2"	2.41	3.41	60.5		20	12.1
SLPK-250S	2 1/2"	3.15	4	137.5		12	16.5
SLPK-300S	3"	3.79	4.5	185.8		12	22.3
SLPK-350S	3 1/2"	4.29	4.53	213.3		6	12.8
SLPK-400S	4"	4.79	5.25	271.6		6	16.3

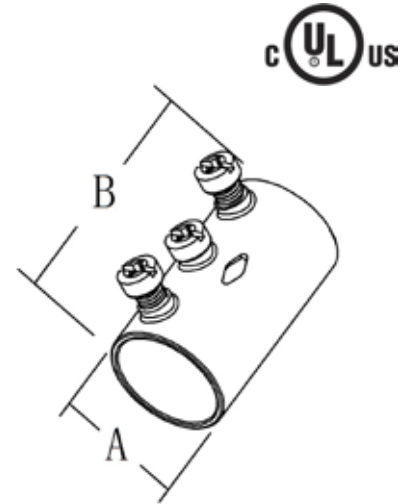

EMT Straps

One-Hole EMT Clamps




Features & Benefits:

- Indoor or outdoor, used to secure EMT to wood, masonry or where greater load bearing is required.
- Zinc-plated steel construction
- Inverted rib for added strength
- Snap-on strap for use with EMT
- UL listed - NEMA/ANSI FB-1 Compliant
- *2 1/2" to 4" Suitable for both Rigid/IMC and EMT



Certifications: UL2239

CAT#	TRADE SIZE IN	A LENGTH IN	B LENGTH IN	C DIA IN	D LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
							INNER CASE	MASTER CASE	WT LBS
OES-50S	1/2"	1.62	0.78	0.55		0.905	100	1000	9
OES-75S	3/4"	1.90	0.85	0.63		1.18	100	1000	12
OES-100S	1"	2.23	1.18	0.75		2.30	50	500	12
OES-125S	1 1/4"	2.73	1.49	0.75		3.40	25	250	9
OES-150S	1 1/2"	2.94	1.70	0.79		4.16	10	100	4
OES-200S	2"	3.75	2.21	1.10		8.65	10	100	9
ORS-250S*	2 1/2"	4.96	2.89	1.24		17.70		50	9
ORS-300S*	3"	5.60	3.39	1.24		23.60		25	6
ORS-350S*	3 1/2"	6.26	3.91	1.24		23.60		25	6
ORS-400S*	4"	6.77	4.31	1.24		28.40		25	7

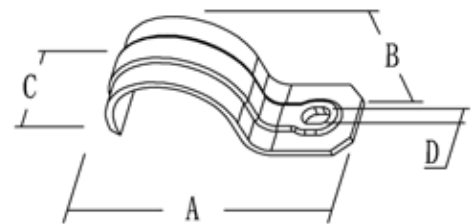

Two-Hole EMT Clamps




Features & Benefits:

- Indoor or outdoor, used to secure EMT to wood, masonry or where greater load bearing is required.
- Zinc-plated steel construction
- Inverted rib for added strength
- Snap-on strap for use with EMT
- UL listed - NEMA/ANSI FB-1 Compliant
- *2 1/2" to 4" Suitable for both Rigid/IMC and EMT



Certifications: UL2239

CAT#	TRADE SIZE IN	A LENGTH IN	B HEIGHT IN	C WIDTH IN	D DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
							INNER CASE	MASTER CASE	WT LBS
TES-50S	1/2"	2.46	0.82	0.61	0.19	0.91	100	1000	9
TES-75S	3/4"	2.83	1.07	0.69	0.19	1.18	100	1000	12
TES-100S	1"	3.36	1.35	0.87	0.25	2.30	50	500	12
TES-125S	1 1/4"	4.11	1.69	0.87	0.25	3.40	25	250	9
TES-150S	1 1/2"	4.65	1.96	0.87	0.25	4.16	10	100	4
TES-200S	2"	5.06	2.43	0.99	0.32	8.65	10	100	9
TRS-250S*	2 1/2"	5.77	2.91	0.99	0.38	10.40		25	2.6
TRS-300S*	3"	6.24	3.54	0.99	0.38	12.08		25	3
TRS-350S*	3 1/2"	7.19	4.02	0.99	0.38	15.92		25	4
TRS-400S*	4"	7.76	4.52	0.99	0.38	15.92		25	4

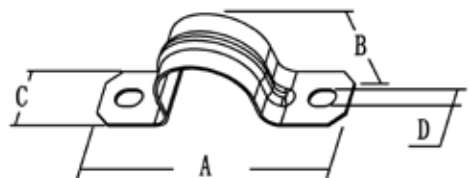

Combination Pull Elbows

Set-Screw and threaded Pull Elbow - EMT/RIGID to EMT/RIGID


Features & Benefits:

- Pull Elbows are used to connect two lengths of Threaded Rigid/ EMT to form a 90° bend.
- Removable Aluminum Cover & Neoprene gasket to facilitate easy wire pulling
- Rain Tight when assembled when used with threaded Rigid Conduit.
- Zinc Die Cast construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B DIA IN	C DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
PE-50	1/2"	1.76	1.96	1.96	16.10	10	100	16
PE-75	3/4"	2.15	2.22	2.22	25.48	5	50	13
PE-100	1"	3.17	3.05	3.05	50.34		25	13
PE-125	1 1/4"	3.24	3.26	3.26	73.26		20	15

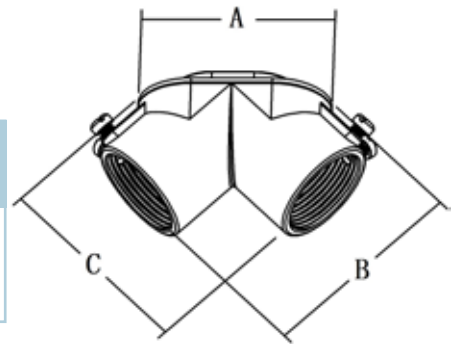

Set-Screw and threaded Pull Elbow - EMT/RIGID to Box


Features & Benefits:

- Pull Elbows are used to connect threaded Rigid/EMT to a box or enclosure to form a 90° bend.
- Removable Aluminum Cover & Neoprene gasket to facilitate easy wire pulling.
- Rain Tight when assembled when used with threaded Rigid Conduit.
- Zinc Die Cast construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B DIA IN	C DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
PEB-50	1/2"	1.76	1.96	1.96	16.00	10	100	16
PEB-75	3/4"	2.15	2.22	2.22	23.58	5	50	12
PEB-100	1"	3.17	3.05	3.05	71.28		25	18
PEB-125	1 1/4"	3.24	3.35	3.35	78.10		20	16

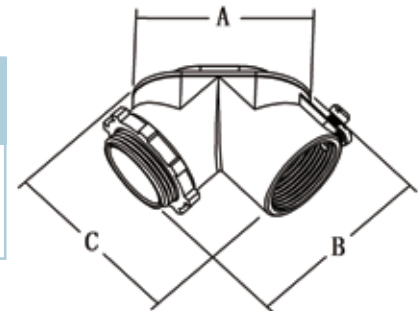

Installation Examples




Chase Nipples



Certifications: UL-514B

CAT#	TRADE SIZE	A WIDTH	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
CN-50	1/2"	1.04	0.59	2.2	100	1000	22
CN-75	3/4"	1.34	0.72	3.63	50	500	18
CN-100	1"	1.63	0.78	5.04	25	250	13
CN-125	1 1/4"	2.04	0.88	8.03	25	250	20
CN-150	1 1/2"	2.35	0.91	10.63	25	100	11
CN-200	2"	2.79	1.03	15.69	10	40	7
CN-250	2 1/2"	3.43	1.38	33.22	10	40	14
CN-300	3"	4.04	1.38	41.58	10	40	17
CN-350	3 1/2"	4.59	1.38	55.00	5	20	11
CN-400	4"	5.10	1.38	72.27	5	20	16

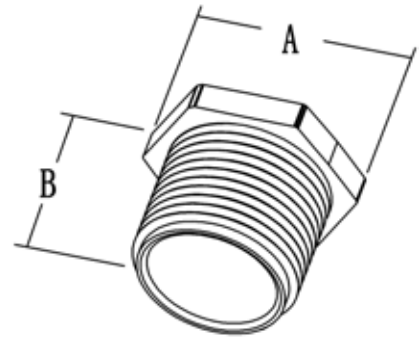

Features & Benefits:


- When used with a locknut, conduit nipples serve as a short raceway between enclosures.
- Concrete Tight.
- Zinc Die Cast construction.

1" Length Chase Nipples



Certifications: UL-514B

CAT#	TRADE SIZE	A WIDTH	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
CN-50-L	1/2"	1.04	1.00	3.7		100	3.7
CN-75-L	3/4"	1.34	1.00	5.6		50	2.8
CN-100-L	1"	1.63	1.00	8.5		25	2.1

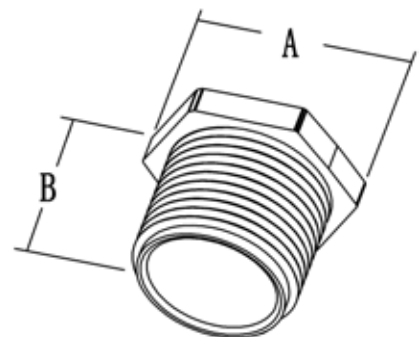

Features & Benefits:

- When used with a locknut, conduit nipples serve as a short raceway between enclosures.
- Concrete Tight.
- Zinc Die Cast construction.

Three-Piece Coupling




Certifications: UL-514B

CAT#	TRADE SIZE	A WIDTH	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
R3K-50M	1/2"	1.36	1.31	12.23	20	200	25
R3K-75M	3/4"	1.41	1.57	12.20	10	100	13
R3K-100M	1"	1.62	1.87	25.90	5	50	13
R3K-125M	1 1/4"	1.83	2.28	40.10	5	50	20
R3K-150M	1 1/2"	1.94	2.59	57.03	3	30	17
R3K-200M	2"	2.23	3.14	82.95	2	20	17
R3K-250M	2 1/2"	3.09	3.72	159.80	1	10	16
R3K-300M	3"	3.19	4.37	198.80	1	5	10
R3K-350M	3 1/2"	3.37	4.90	252.20	1	5	13
R3K-400M	4"	3.45	5.44	313.00	1	2	7
R3K-500M	5"	3.58	7.00	700.00		1	7
R3K-600M	6"	3.79	8.10	1100.00		1	11

Features & Benefits:

- When used with a locknut, conduit nipples serve as a short raceway between enclosures.
- Concrete Tight.
- Zinc Die Cast construction.

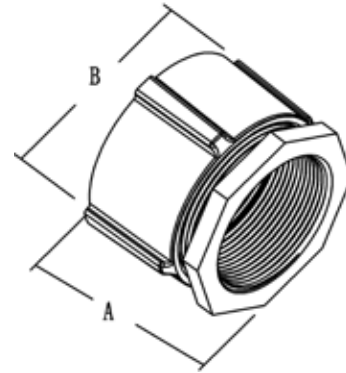

Reducing Bushing




Certifications: UL-514B

CAT#	TRADE SIZE	A WIDTH	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
1161	3/4" - 1/2"	1.04	0.57	3.84	100	1000	38
1162	1" - 1/2"	1.28	0.64	12.30	50	500	62
1163	1" - 3/4"	1.28	0.69	6.91	50	500	35
1164	1 1/4" - 1/2"	1.63	0.69	26.97	25	250	67
1165	1 1/4" - 3/4"	1.63	0.69	21.65		25	5
1166	1 1/4" - 1"	1.63	0.69	14.34		25	4
1167	1 1/2" - 1/2"	1.86	0.75	44.70		25	11
1168	1 1/2" - 3/4"	1.86	0.75	36.17		25	9
1169	1 1/2" - 1"	1.86	0.75	26.84		25	7
1170	1 1/2" - 1 1/4"	1.86	0.75	11.97		25	3
1171	2" - 1/2"	2.33	0.82	84.26		10	8
1172	2" - 3/4"	2.33	0.82	76.56		10	8
1173	2" - 1"	2.33	0.82	69.96		10	7
1174	2" - 1 1/4"	2.33	0.82	48.40		10	5
1175	2" - 1 1/2"	2.33	0.82	34.10		10	3

Features & Benefits:

- Used to reduce the entry size of a run of threaded conduit.
- Straight NPSM for male and female.
- Zinc Plated Steel Construction.

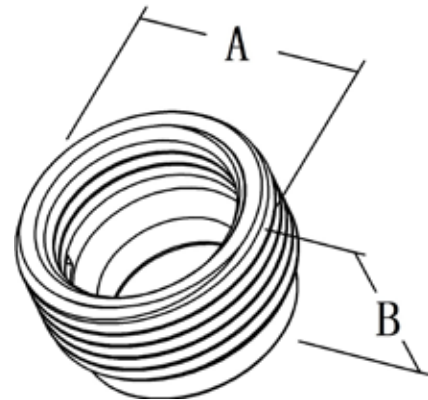

Reducing Bushing




Features & Benefits:

- Used to reduce the entry size of a run of threaded conduit.
- NPT for male and female.
- Zinc plated Malleable Iron Construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RB-250100M	2 1/2"-1"	2.88	1.30	160		10	16
RB-250125M	2 1/2"-1 1/4"	2.88	1.30	140		10	14
RB-250150M	2 1/2"-1 1/2"	2.88	1.30	120		10	12
RB-250200M	2 1/2"-2"	2.88	1.30	80		10	8
RB-300100M	3"-1"	3.50	1.54	310		10	31
RB-300125M	3"-1 1/4"	3.50	1.54	280		10	28
RB-300150M	3"-1 1/2"	3.50	1.54	260		10	26
RB-300200M	3"-2"	3.50	1.54	200		10	20
RB-300250M	3"-2 1/2"	3.50	1.54	130		10	13
RB-350150M	3 1/2"-1 1/2"	4.00	1.59	390		10	39
RB-350200M	3 1/2"-2"	4.00	1.59	340		10	34
RB-350250M	3 1/2"-2 1/2"	4.00	1.59	270		10	27
RB-350300M	3 1/2"-3"	4.00	1.59	130		10	13
RB-400200M	4"-2"	4.51	1.77	500		10	50
RB-400250M	4"-2 1/2"	4.51	1.77	430		10	43
RB-400300M	4"-3"	4.51	1.77	300		10	30
RB-400350M	4"-3 1/2"	4.51	1.77	170		10	17

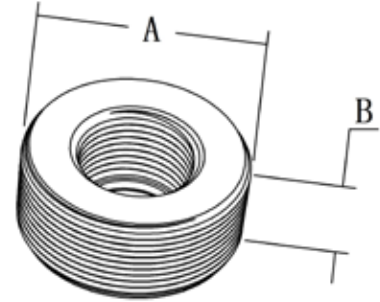

Threaded Rigid Conduit and IMC Enlargers


Features & Benefits:

- RME adapters are used to enlarge drilled and tapped openings by an threaded size
- Zinc plated steel construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RME-5075S	3/4"-1/2"	1.17	0.96	7.1	25	250	17.6
RME-75100S	1"-3/4"	1.46	1.01	12.7	10	100	12.7
RME-100125S	1 1/4"-1"	1.85	1.19	18.8	10	100	18.8
RME-125150S	1 1/2"-1 1/4"	2.01	1.46	25.5	10	100	25.5
RME-150200S	2"-1 1/2"	2.53	1.57	39.0	5	50	19.0



Threaded Rigid Conduit and IMC Enlargers


Features & Benefits:

- RME adapters are used to enlarge drilled and tapped openings by an threaded size
- Zinc plated malleable iron construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RME-5075M	3/4"-1/2"	1.33	1.16	110		10	1.1
RME-75100M	1"-3/4"	1.61	1.26	170		10	1.7
RME-100125M	1-1/4"-1"	1.99	1.38	240		10	2.4
RME-125150M	1-1/2"-1-1/4"	2.24	1.46	300		10	3.0



Grounding Bushings



Features & Benefits:

- Used with locknut to terminate threaded rigid conduit or IMC to a box or enclosure.
- Rounded surface of bushing prevents damage to wire insulation during installation.
- Plastic Ring 150°C
- Zinc Die Cast construction.
- Aluminum Grounding Lug.



Certifications: UL-514B & UL467

CAT#	TRADE SIZE IN	GROUND LUG		A WIDTH IN	B HEIGHT IN	WT /100pcs Lbs	PACKAGE INFORMATION		
		MIN SOLID	MAX STRAND				INNER CASE	MASTER CASE	WT LBS
GB-50	1/2"	#14	#4	1.04	0.38	4.88	50	500	24.42
GB-75	3/4"	#14	#4	1.31	0.41	7.04	50	500	35.20
GB-100	1"	#14	#4	1.59	0.50	8.77	25	250	43.87
GB-125-14	1 1/4"	#14	#4	1.9	0.53	10.89	20	200	21.78
GB-150-14	1 1/2"	#14	#4	2.16	0.56	14.30	10	100	14.30
GB-200-14	2"	#14	#4	2.67	0.66	17.16	10	100	17.16
GB-250	2 1/2"	#14	1/0	3.23	0.75	28.60		50	14.30
GB-300	3"	#14	1/0	3.85	0.75	39.60		50	19.80
GB-350	3 1/2"	#14	1/0	4.36	0.75	43.00		50	21.50
GB-400	4"	#14	1/0	4.87	0.75	66.00		10	6.60



Grounding Bushings




Features & Benefits:

- Used with locknut to terminate threaded rigid conduit or IMC to a box or enclosure.
- Rounded surface of bushing prevents damage to wire insulation during installation.
- Plastic Ring 150°C
- Zinc plated Malleable Iron construction.
- Aluminum Grounding Lug.



Certifications: UL-514B & UL467

CAT#	TRADE SIZE IN	GROUND LUG		A WIDTH IN	B HEIGHT IN	WT /100pcs Lbs	PACKAGE INFORMATION		
		MIN SOLID	MAX STRAND				INNER CASE	MASTER CASE	WT LBS
331M	1/2"	#14	#4	1.08	0.57	3.52	50	500	17.60
332M	3/4"	#14	#4	1.31	0.57	4.20	50	500	21.00
333M	1"	#14	#4	1.61	0.65	6.16	25	250	15.40
334M	1 1/4"	#14	#4	1.91	0.71	7.00	20	200	14.00
335M	1 1/2"	#14	#4	2.16	0.73	9.20	10	100	9.20
336M	2"	#14	#4	2.72	0.73	12.30	10	100	12.30
337M	2 1/2"	#14	1/0	3.23	0.94	30.00		10	3.00
338M	3"	#14	1/0	3.88	0.94	30.00		10	3.00
339M	3 1/2"	#14	1/0	4.43	0.94	43.00		50	21.50
340M	4"	#14	1/0	4.89	0.94	66.00		10	6.60
340AM	5"	#6	250 MCM	6.10	1.14	40.00		10	4.00
340BM	6"	#6	250 MCM	7.15	1.14	60.00		10	6.00

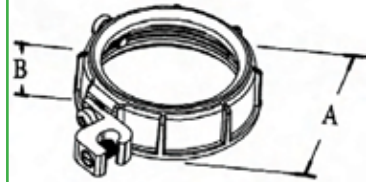

Conduit Bushings




Features & Benefits:

- Use with locknut to terminate Rigid conduit or IMC to a box or enclosure.
- Rounded surface of bushing prevents damage to wire insulation during installation.
- Plastic Ring 150°C.
- Zinc Die Cast



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
CBI-50	1/2"	1.04	0.38	2.4	100	1000	24.2
CBI-75	3/4"	1.31	0.41	3.9	50	500	19.5
CBI-100	1"	1.58	0.50	5.9	50	500	29.6
CBI-125	1 1/4"	1.90	0.53	7.4	25	250	18.4
CBI-150	1 1/2"	2.16	0.56	10.1	25	250	25.3
CBI-200	2"	2.67	0.66	17.2	10	100	17.2
CBI-250	2 1/2"	3.23	0.75	27.8		50	13.9
CBI-300	3"	3.85	0.75	32.4		25	8.1
CBI-350	3 1/2"	4.36	0.75	37.6		25	9.4
CBI-400	4"	4.87	0.75	45.0		10	4.5

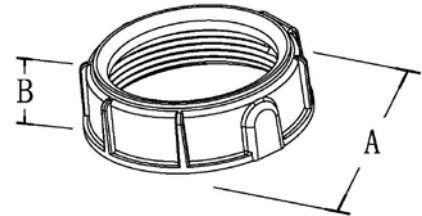


Insulating Plastic Bushings



Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER Case	MASTER Case	WT LBS
CB-50P	1/2"	1.06	0.43	1.08	100	1000	11
CB-75P	3/4"	1.31	0.43	1.51	100	1000	16
CB-100P	1"	1.59	0.48	3.01	50	500	15
CB-125P	1 1/4"	1.96	0.56	4.30	20	200	9
CB-150P	1 1/2"	2.18	0.56	5.38	20	200	11
CB-200P	2"	2.68	0.59	6.45	20	200	13
CB-250P	2 1/2"	3.25	0.72	17.20		25	5
CB-300P	3"	3.87	0.75	17.20		25	5
CB-350P	3 1/2"	4.37	0.77	43.00		25	11
CB-400P	4"	5.00	0.77	21.50		10	2

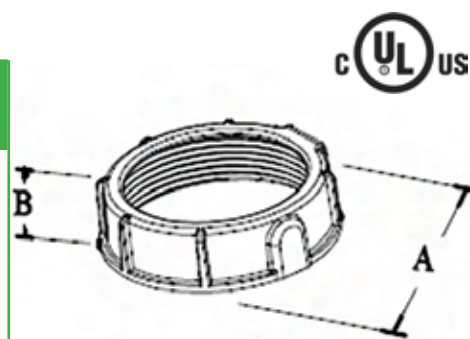

Features & Benefits:


- Used with locknut to terminate threaded rigid conduit or IMC to a box or enclosure.
- Rounded surface of bushing prevents damage to wire insulation.
- 105°C Flame Retardant Thermoplastic construction.

Rigid Watertight Hubs



Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER Case	MASTER Case	WT LBS
TH-050	1/2"	1.31	1.54	20.02	25	250	50
TH-075	3/4"	1.37	1.73	29.52	10	100	29
TH-100	1"	1.59	2.04	37.53	10	100	37
TH-125	1 1/4"	1.59	2.42	57.20	2	20	11
TH-150	1 1/2"	1.59	2.79	75.24	2	20	15
TH-200	2"	1.59	3.30	98.56		10	10
TH-250	2 1/2"	2.44	3.70	151.80		5	7
TH-300	3"	2.44	4.39	184.80		5	9
TH-350	3 1/2"	2.44	4.88	233.20		5	12
TH-400	4"	2.44	5.50	264.00		1	2

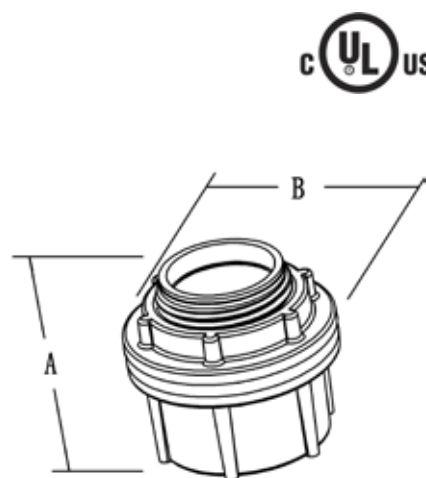

Features & Benefits:

- Conduit Hubs are used to terminate threaded conduit through the walls of enclosure, indoors and outdoors application specifically for food plants, distilleries, breweries, sewage disposal plants, chemical plants, paper mills, and refineries.
- Zinc Die Cast construction.
- Thermoplastic Ring rated to 105°C.

Rigid Watertight Hubs




Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
TH-50A	1/2"	1.46	1.44	8.8	25	250	22.0
TH-75A	3/4"	1.56	1.68	13.2	10	100	13.2
TH-100A	1"	1.77	1.99	18.7	10	100	18.7
TH-125A	1 1/4"	1.77	2.36	28.5	2	20	5.7
TH-150A	1 1/2"	1.79	2.74	35.0	2	20	7.0
TH-200A	2"	1.80	3.23	40.0		10	4.0
TH-250A	2 1/2"	2.57	3.69	68.0		5	3.4
TH-300A	3"	2.58	4.36	82.0		5	4.1
TH-350A	3 1/2"	2.58	4.95	100.0		5	5.0
TH-400A	4"	2.58	5.45	120.0		1	1.2

Features & Benefits:

- Conduit Hubs are used to terminate threaded rigid conduit through the walls of enclosure, indoors and outdoors application specifically for food plants, distilleries, breweries, sewage disposal plants, chemical plants, paper processing mills and refineries.
- Aluminum Die cast construction.
- Thermoplastic Ring rated to 105°C

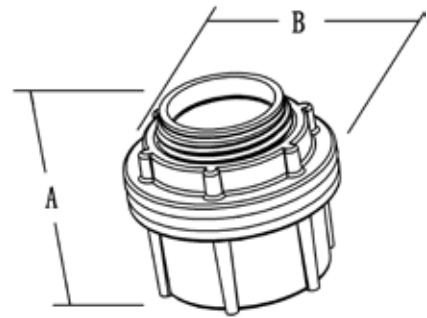

Grounding Watertight Hubs




Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
THG-50A	1/2"	1.46	1.44	10.1	25	250	25.3
THG-75A	3/4"	1.56	1.68	13.6	10	100	13.6
THG-100A	1"	1.77	1.99	19.3	10	100	19.3
THG-125A	1-1/4"	1.77	2.36	25.5	2	20	5.1
THG-150A	1-1/2"	1.79	2.74	32.0	2	20	6.4
THG-200A	2"	1.8	3.23	41.0		10	4.1
THG-250A	2-1/2"	2.57	3.69	68.0		5	3.4
THG-300A	3"	2.58	4.36	82.0		5	4.1
THG-350A	3-1/2"	2.58	4.95	102.0		5	5.1
THG-400A	4"	2.58	5.45	110.0		1	1.1

Features & Benefits:

- Conduit Hubs are used to terminate threaded conduit through the walls of enclosure, indoors and outdoors application specifically for food plants, distilleries, breweries, sewage disposal plants, chemical plants, paper mills, and refineries.
- Copper-free die cast aluminum
- Thermoplastic ring rated to 105°C.

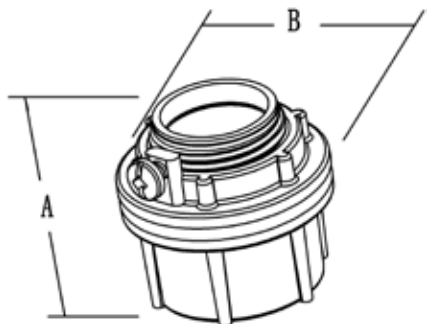

Grounding Watertight Hubs




Features & Benefits:

- Conduit Hubs are used to terminate threaded rigid conduit through the walls of enclosure, indoors and outdoors application specifically for food plants, distilleries, breweries, sewage disposal plants, chemical plants, paper processing mills and refineries.
- Zinc Die cast construction.
- Thermoplastic Ring rated to 105°C



Certifications: UL-514B and UL-467

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
THG-50	1/2"	1.46	1.44	22.0	25	250	55.0
THG-75	3/4"	1.56	1.68	29.3	10	100	29.3
THG-100	1"	1.77	1.99	43.8	10	100	43.8
THG-125	1 1/4"	1.77	2.36	73.5	2	20	14.7
THG-150	1 1/2"	1.79	2.74	76.5	2	20	15.3
THG-200	2"	1.80	3.23	101.0		10	10.1
THG-250	2 1/2"	2.57	3.69	152.0		5	7.6
THG-300	3"	2.58	4.36	198.0		5	9.9
THG-350	3 1/2"	2.58	4.95	196.0		5	9.8
THG-400	4"	2.58	5.45	260.0		1	2.6

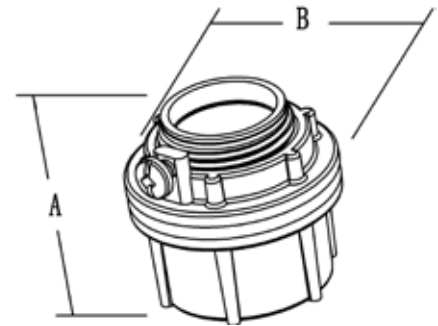

Grounding Watertight Hubs




Features & Benefits:

- Conduit Hubs are used to terminate threaded rigid conduit through the walls of enclosure, indoors and outdoors application specifically for food plants, distilleries, breweries, sewage disposal plants, chemical plants, paper processing mills and refineries.
- Zinc plated malleable iron construction.
- Thermoplastic ring rated to 105°C



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
THG-50M	1/2"	1.54	1.36	1.09	21.0	25	250	52.4
THG-75M	3/4"	1.77	1.50	1.30	30.9	10	100	30.9
THG-100M	1"	2.15	1.77	1.59	49.9	10	100	49.9
THG-125M	1 1/4"	2.50	1.93	1.94	76.0	2	20	15.2
THG-150M	1 1/2"	3.00	1.97	2.20	99.0	2	20	19.8
THG-200M	2"	3.35	2.05	2.68	120.0		10	12.0
THG-250M	2 1/2"	3.92	2.76	3.25	224.0		5	11.2
THG-300M	3"	4.74	2.99	3.92	334.0		5	16.7
THG-350M	3 1/2"	5.39	3.09	4.46	436.0		5	21.8
THG-400M	4"	5.91	3.31	4.82	508.0		5	25.4
THG-500M	5"	7.36	3.46	6.10	830.0		1	8.3
THG-600M	6"	8.39	3.62	7.25	1120.0		1	11.2

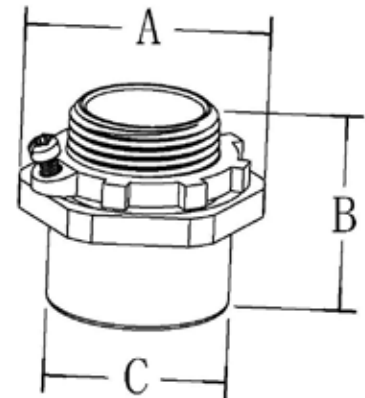

Compression Connectors




Features & Benefits:

- Rigid Conduit and IMC compression connector are used to join non-threaded rigid conduit or IMC to box or enclosure.
- Concrete Tight.
- Zinc planted malleable iron construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RCC-50M	1/2"	1.45	1.74	23	20	200	45
RCC-75M	3/4"	1.68	1.87	28	10	100	28
RCC-100M	1"	1.93	2.13	44	5	50	22
RCC-125M	1 1/4"	2.34	2.49	62	5	50	31
RCC-150M	1 1/2"	2.56	2.52	75		12	9
RCC-200M	2"	3.14	2.58	108		12	13
RCC-250M	2 1/2"	2.83	3.49	200		5	10
RCC-300M	3"	4.46	3.69	300		3	9
RCC-350M	3 1/2"	5.01	3.73	450		2	9
RCC-400M	4"	5.53	3.99	450		2	9
RCC-500M	5"	6.86	4.72	800		1	8
RCC-600M	6"	8.14	5.04	1000		1	10



Compression Connectors




Features & Benefits:

- Rigid Conduit and IMC compression connector are used to join non-threaded rigid conduit or IMC to box or enclosure.
- Concrete Tight.
- Zinc Plated Steel Construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER Case	MASTER Case	WT LBS
RCC-50S	1/2"	1.18	1.37	13	20	200	26
RCC-75S	3/4"	1.42	1.54	20	10	100	20
RCC-100S	1"	1.76	1.75	32	5	50	16
RCC-125S	1 1/4"	2.16	2.05	52	5	50	26
RCC-150S	1 1/2"	2.38	2.12	61		12	7
RCC-200S	2"	3.88	2.16	80		12	10



Insulated Compression Connectors




Features & Benefits:

- Rigid Conduit and IMC compression connector are used to join non-threaded rigid conduit or IMC to box or enclosure.
- Concrete Tight.
- Insulated Throat - Thermoplastic rated to 105°C.
- Malleable Iron Construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RCCI-50M	1/2"	1.45	1.74	23	20	200	45
RCCI-75M	3/4"	1.68	1.87	28	10	100	28
RCCI-100M	1"	1.93	2.13	44	5	50	22
RCCI-125M	1 1/4"	2.34	2.49	62	5	50	31
RCCI-150M	1 1/2"	2.56	2.52	75		12	9
RCCI-200M	2"	3.14	2.58	108		12	13
RCCI-250M	2 1/2"	2.83	3.49	200		5	10
RCCI-300M	3"	4.46	3.69	300		3	9
RCCI-350M	3 1/2"	5.01	3.73	450		2	9
RCCI-400M	4"	5.53	3.99	450		2	9
RCCI-500M	5"	6.86	4.72	800		1	8
RCCI-600M	6"	8.14	5.04	1000		1	10



Insulated Compression Connectors




Features & Benefits:

- Rigid Conduit and IMC compression connector are used to join non-threaded rigid conduit or IMC to a box or enclosure.
- Concrete Tight.
- Insulated Throat - Thermoplastic rated to 105°C.
- Zinc Plated Steel Construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER Case	MASTER Case	WT LBS
RCCI-50S	1/2"	1.18	1.37	13	20	200	26
RCCI-75S	3/4"	1.42	1.54	20	10	100	20
RCCI-100S	1"	1.76	1.75	32	5	50	16
RCCI-125S	1 1/4"	2.16	2.05	52	5	50	26
RCCI-150S	1 1/2"	2.38	2.12	61		12	7
RCCI-200S	2"	3.88	2.16	80		12	10



Compression Couplings




Features & Benefits:

- Rigid conduit and IMC compression couplings are used to join two lengths of unthreaded rigid conduit or IMC.
- Concrete tight.
- Zinc plated malleable iron construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RCK-50M	1/2"	1.45	2.16	33	10	100	33
RCK-75M	3/4"	1.68	2.30	38	10	100	38
RCK-100M	1"	1.93	2.68	54	5	50	27
RCK-125M	1 1/4"	2.34	3.02	82	5	50	41
RCK-150M	1 1/2"	2.56	3.16	100		12	12
RCK-200M	2"	3.14	3.33	160		5	8
RCK-250M	2 1/2"	3.83	4.38	200		5	10
RCK-300M	3"	4.46	4.74	300		3	9
RCK-350M	3 1/2"	5.01	4.86	450		2	9
RCK-400M	4"	5.53	5.29	450		2	9
RCK-500M	5"	6.86	6.10	1000		1	10
RCK-600M	6"	8.14	6.81	1300		1	13

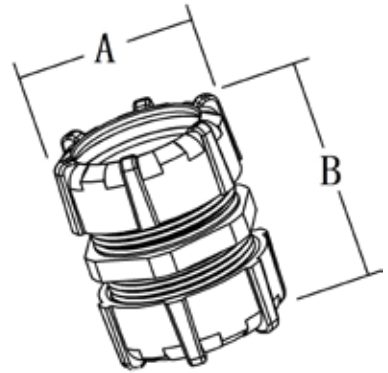

Compression Couplings




Features & Benefits:

- Rigid conduit and IMC compression couplings are used to joint two length of unthreaded rigid Conduit or IMC.
- Concrete tight.
- Zinc plated steel construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER Case	MASTER Case	WT LBS
RCK-50S	1/2"	1.18	1.72	18	10	100	18
RCK-75S	3/4"	1.42	1.99	26	10	100	26
RCK-100S	1"	1.76	2.22	42	5	50	21
RCK-125S	1 1/4"	2.16	2.48	66	5	50	33
RCK-150S	1 1/2"	2.38	2.56	78		12	9
RCK-200S	2"	3.88	2.62	100		5	5



Insulated raintight compression Connectors


Features & Benefits:

- Rigid conduit and IMC compression connectors are used to join non-threaded rigid conduit or IMC to box or enclosure.
- Raintight and concrete tight.
- Insulated Throat-Thermoplastic rated to 105°C
- Zinc plated malleable iron construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RCCI-50RTM	1/2"	1.45	1.74	23	20	200	45
RCCI-75RTM	3/4"	1.68	1.87	29	10	100	29
RCCI-100RTM	1"	1.93	2.13	44	5	50	22
RCCI-125RTM	1 1/4"	2.34	2.49	64	5	50	32
RCCI-150RTM	1 1/2"	2.56	2.52	75		12	9
RCCI-200RTM	2"	3.14	2.58	108		12	13
RCCI-250RTM	2 1/2"	3.83	3.49	220		5	11
RCCI-300RTM	3"	4.46	3.69	267		3	8
RCCI-350RTM	3 1/2"	5.01	3.73	350		2	7
RCCI-400RTM	4"	5.53	3.99	400		2	8



Raintight Compression Couplings


Features & Benefits:

- Rigid conduit and IMC compression couplings are used to join two lengths of unthreaded rigid conduit or IMC.
- Raintight and concrete tight.
- Zinc plated malleable iron construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RCK-50RTM	1/2"	1.45	2.16	33	10	100	33
RCK-75RTM	3/4"	1.68	2.30	38	10	100	38
RCK-100RTM	1"	1.93	2.68	54	5	50	27
RCK-125RTM	1 1/4"	2.34	3.02	82	5	50	41
RCK-150RTM	1 1/2"	2.56	3.16	100		12	12
RCK-200RTM	2"	3.14	3.33	160		5	8
RCK-250RTM	2 1/2"	3.83	4.38	280		5	14
RCK-300RTM	3"	4.46	4.74	367		3	11
RCK-350RTM	3 1/2"	5.01	4.86	400		2	8
RCK-400RTM	4"	5.53	5.29	500		2	10

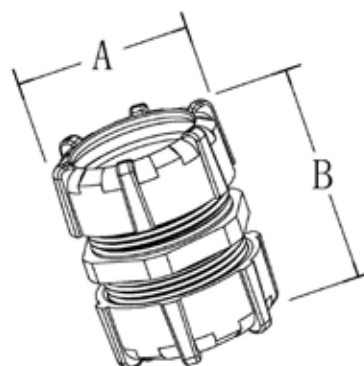

Rigid Offset Nipples

Zinc Die Cast 3/4" Offset Nipple




Features & Benefits:

- Used to offset the axis of raceway by 3/4"
- Zinc Die Cast Construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B DIA IN	C DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
ON-50	1/2"	2.48	0.95	0.75	11	10	100	11
ON-75	3/4"	2.34	1.18	0.75	11	10	100	11
ON-100	1"	2.67	1.52	0.75	17	10	100	17
ON-125	1 1/4"	2.85	1.81	0.75	34	5	50	17
ON-150	1 1/2"	2.86	2.14	0.75	30	5	50	15
ON-200	2"	2.95	2.60	0.75	72.5	2	20	15

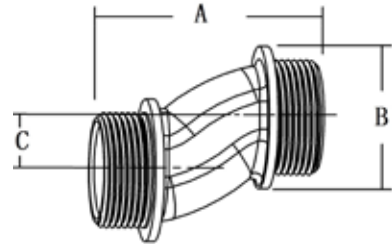

Malleable Iron 3/4" Offset Nipple




Features & Benefits:

- Used to offset the axis of raceway by 3/4"
- Zinc plated malleable iron construction.



Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B DIA IN	C DIA IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
ON-250M	2 1/2"	3.97	3.26	0.75	149		2	2.98
ON-300M	3"	4.43	3.81	0.75	210		2	4.20
ON-350M	3 1/2"	4.82	4.38	0.75	270		1	2.70
ON-400M	4"	5.04	4.96	0.75	326		1	3.26

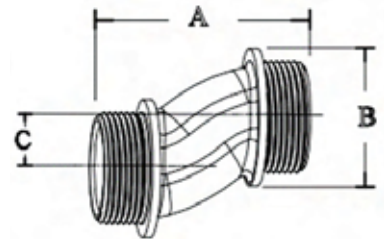

Box Spacer




Features & Benefits:

- Use as a raceway between two enclosures.
- Zinc die cast

Certifications: UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
BB-50	1/2"	1.10	1.28	7.5	50	500	37.6
BB-75	3/4"	1.36	1.04	8.6	25	250	21.5

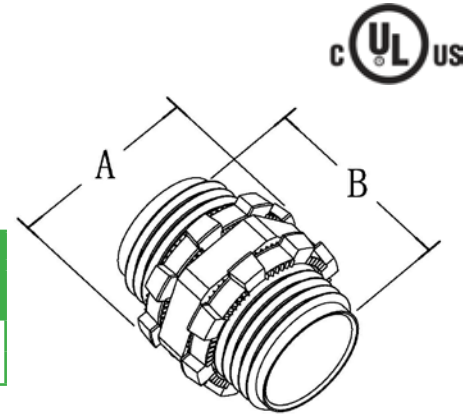

Bonding Locknuts




Features & Benefits:

- To fasten threaded conduit or connector to the opening in a box or enclosure, especially suitable for harsh vibration environments.
- Steel/Zinc Plated

Certifications: UL-467 and UL-514B

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
BLN-50S	1/2"	1.14	0.17	2.6	100	1000	25.7
BLN-75S	3/4"	1.39	0.18	3.1	100	1000	31.4
BLN-100S	1"	1.73	0.24	4.4	50	500	22.0
BLN-125S	1 1/4"	2.08	0.24	5.9	50	500	29.6
BLN-150S	1 1/2"	2.40	0.25	6.5	25	250	16.2
BLN-200S	2"	2.91	0.29	8.7	20	200	17.3
BLN-250S	2 1/2"	3.46	0.29	10.6		50	5.3
BLN-300S	3"	4.14	0.30	15.0		50	7.5
BLN-350S	3 1/2"	4.69	0.30	18.4		25	4.6
BLN-400S	4"	5.25	0.34	20.4		25	5.1
BLN-500S	5"	6.52	0.45	89.0		10	8.9
BLN-600S	6"	7.84	0.46	104.0		10	10.4

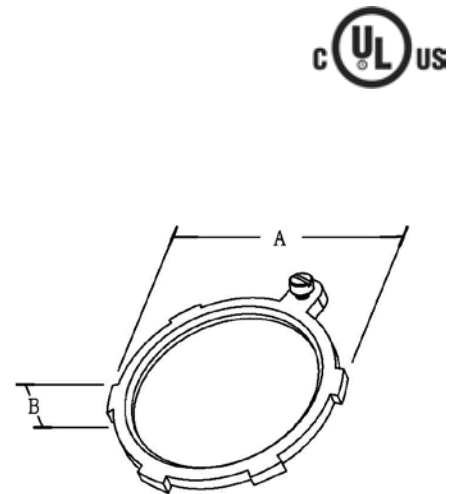

Steel Locknuts




Features & Benefits:

- Used in harsh vibration environments to fasten threaded conduit to non-threaded opening in a box or enclosure
- Tightens without deforming.
- Zinc Plated Steel Construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A Width	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
LN-50S	1/2"	1.14	0.23	1.40	200	2000	28.00
LN-75S	3/4"	1.39	0.23	1.94	100	1000	19.40
LN-100S	1"	1.73	0.27	3.81	100	1000	38.14
LN-125S	1 1/4"	2.08	0.27	4.76	50	500	23.81
LN-150S	1 1/2"	2.40	0.30	5.78	50	500	28.88
LN-200S	2"	2.91	0.30	7.98	25	250	19.95
LN-250S	2 1/2"	3.46	0.33	11.90		50	5.95
LN-300S	3"	4.14	0.33	16.08		50	8.04
LN-350S	3 1/2"	4.69	0.33	23.8		25	5.95
LN-400S	4"	5.25	0.34	23.8		25	5.95

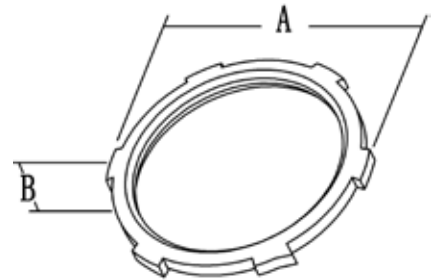


Steel Locknuts



Features & Benefits:

- Used to fasten threaded conduit or connector to non-threaded opening in a box or enclosure.
- Non-UL listed Steel Locknuts with thinner wall thickness.
- Zinc plated steel construction.

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
LN-50S-NUL	1/2"	1.14	0.19	1.08	200	2000	21.60
LN-75S-NUL	3/4"	1.39	0.19	1.94	100	1000	19.40
LN-100S-NUL	1"	1.73	0.23	3.04	100	1000	30.42
LN-125S-NUL	1 1/4"	2.08	0.23	3.65	50	500	18.29
LN-150S-NUL	1 1/2"	2.40	0.26	4.80	50	500	24.03
LN-200S-NUL	2"	2.91	0.26	7.14	25	250	17.85
LN-250S-NUL	2 1/2"	3.46	0.29	10.76		50	5.38
LN-300S-NUL	3"	4.14	0.29	14.40		50	7.20
LN-350S-NUL	3 1/2"	4.69	0.29	18.40		25	4.60
LN-400S-NUL	4"	5.25	0.31	21.44		25	5.36
LN-500S-NUL	5"	6.54	0.31	56.60		10	5.66
LN-600S-NUL	6"	7.90	0.31	74.90		10	7.49

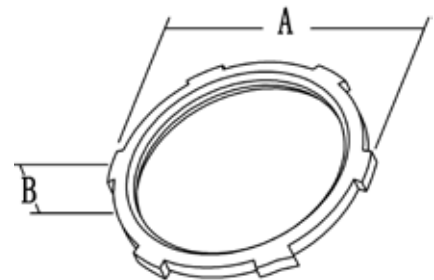

Reducing Washer




Certifications: UL-514B

CAT#	TRADE SIZE IN	A WIDTH IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RW75-50	3/4" - 1/2"	1.44	0.05	0.95	100	1000	9.48
RW100-50	1" - 1/2"	1.74	0.05	1.46	100	1000	14.67
RW100-75	1" - 3/4"	1.74	0.05	1.25	100	1000	12.47
RW125-50	1 1/4" - 1/2"	2.19	0.05	2.77	50	500	13.86
RW125-75	1 1/4" - 3/4"	2.19	0.05	2.48	50	500	12.43
RW125-100	1 1/4" - 1"	2.19	0.05	1.97	50	500	9.88
RW150-50	1 1/2" - 1/2"	2.44	0.05	3.66	50	500	18.33
RW150-75	1 1/2" - 3/4"	2.44	0.05	3.36	50	500	16.79
RW150-100	1 1/2" - 1"	2.44	0.05	2.84	50	500	14.21
RW150-125	1 1/2" - 1 1/4"	2.44	0.05	2.08	50	500	10.41
RW200-50	2" - 1/2"	3.01	0.05	5.77	25	250	14.43
RW200-75	2" - 3/4"	3.01	0.05	5.33	25	250	13.33
RW200-100	2" - 1"	3.01	0.05	4.99	25	250	12.47
RW200-125	2" - 1 1/4"	3.01	0.05	4.19	25	250	10.47
RW200-150	2" - 1 1/2"	3.01	0.05	3.58	25	250	8.95
RW250-50	2 1/2" - 1/2"	3.4	0.06	9.8	25	500	48.9
RW250-75	2 1/2" - 3/4"	3.4	0.06	9.4	25	500	46.9
RW250-100	2 1/2" - 1"	3.4	0.06	8.7	25	500	43.6
RW250-125	2 1/2" - 1 1/4"	3.4	0.06	8.3	25	500	41.4
RW250-150	2 1/2" - 1 1/2"	3.4	0.06	7.8	25	500	39.2
RW250-200	2 1/2" - 2"	3.4	0.06	7.2	25	500	35.9
RW300-50	3" - 1/2"	4.13	0.06	14.4	25	500	72.2
RW300-75	3" - 3/4"	4.13	0.06	14	25	500	70.0
RW300-100	3" - 1"	4.13	0.06	13.6	25	500	67.8
RW300-125	3" - 1 1/4"	4.13	0.06	13.1	25	500	65.6
RW300-150	3" - 1 1/2"	4.13	0.06	12.7	25	500	63.4
RW300-200	3" - 2"	4.13	0.06	12.0	25	500	60.1
RW300-250	3" - 2 1/2"	4.13	0.06	11.1	25	500	55.7
RW350-50	3 1/2" - 1/2"	4.63	0.08	27.2	10	50	13.6
RW350-75	3 1/2" - 3/4"	4.63	0.08	26.8	10	50	13.4
RW350-100	3 1/2" - 1"	4.63	0.08	26.0	10	50	13.0
RW350-125	3 1/2" - 1 1/4"	4.63	0.08	24.6	10	50	12.3
RW350-150	3 1/2" - 1 1/2"	4.63	0.08	23.6	10	50	11.8
RW350-200	3 1/2" - 2"	4.63	0.08	21.4	10	50	10.7
RW350-250	3 1/2" - 2 1/2"	4.63	0.08	20.2	10	50	10.1
RW350-300	3 1/2" - 3"	4.63	0.08	19.0	10	50	9.5
RW400-50	4" - 1/2"	5.15	0.08	34.2	10	50	17.1
RW400-75	4" - 3/4"	5.15	0.08	33.4	10	50	16.7
RW400-100	4" - 1"	5.15	0.08	32.8	10	50	16.4
RW400-125	4" - 1 1/4"	5.15	0.08	31.2	10	50	15.6
RW400-150	4" - 1 1/2"	5.15	0.08	30.6	10	50	15.3
RW400-200	4" - 2"	5.15	0.08	28.2	10	50	14.1
RW400-250	4" - 2 1/2"	5.15	0.08	27.0	10	50	13.5
RW400-300	4" - 3"	5.15	0.08	26.0	10	50	13.0
RW400-350	4" - 3 1/2"	5.15	0.08	24.4	10	50	12.2

Features & Benefits:

- Used in pairs to reduce the size of knockout holes.
- Reducing washers press firmly into knockout, providing a secure connection.
- Zinc Plated Steel Construction.

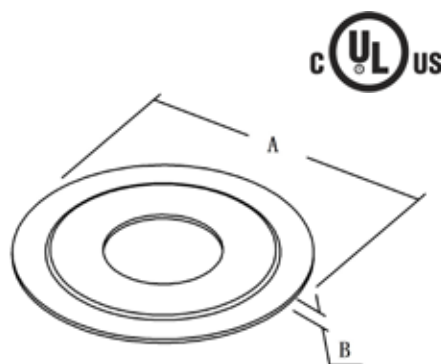

Rigid Straps

Snap-On One Hole Rigid Straps




Features & Benefits:

- Used to support rigid conduit, IMC, liquid tight flexible metallic conduit and liquid tight nonmetallic conduit (type B) to mounting surface.
- From 2-1/2" to 4" also suitable for EMT
- Zinc Plated Steel Construction



Certifications: UL-2239

CAT#	TRADE SIZE	A LENGTH	B DIA	C WIDTH	D HEIGHT	WT /100pcs LBS	PACKAGE INFORMATION		
	IN	IN	IN	IN	IN		INNER CASE	MASTER CASE	WT LBS
ORS-50S	1/2"	1.87	0.87	0.63	0.25	3.17	50	500	16
ORS-75S	3/4"	2.23	1.05	0.74	0.31	4.82	50	500	24
ORS-100S	1"	2.60	1.29	0.87	0.36	6.86	25	250	17
ORS-125S	1 1/4"	2.98	1.62	0.87	0.36	8.45	25	250	21
ORS-150S	1 1/2"	3.54	1.81	1.00	0.43	14.52	25	250	36
ORS-200S	2"	4.14	2.28	1.13	0.54	21.65	10	100	21
ORS-250S	2 1/2"	4.96	2.89	1.24	0.57	38.94	--	50	19
ORS-300S	3"	5.60	3.39	1.24	0.57	51.92	--	25	13
ORS-350S	3 1/2"	6.26	3.91	1.24	0.57	66.62	--	25	16
ORS-400S	4"	6.77	4.31	1.24	0.57	68.90	--	25	17

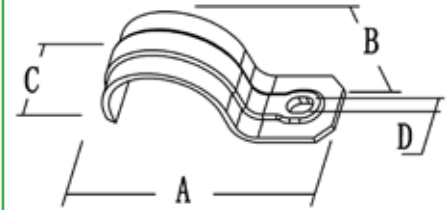

Snap-On Two Hole Rigid Straps




Features & Benefits:

- Used to support rigid conduit and IMC, liquid tight flexible metallic conduit and liquid tight nonmetallic conduit (Type B) to mounting surface.
- From 2-1/2" to 4" also suitable for EMT
- Zinc Plated Steel Construction



Certifications: UL-2239

CAT#	TRADE SIZE	A LENGTH	B DIA	C WIDTH	D HEIGHT	WT /100pcs LBS	PACKAGE INFORMATION		
	IN	IN	IN	IN	IN		INNER CASE	MASTER CASE	WT LBS
TRS-50S	1/2"	2.46	0.82	0.61	0.19	1.8	50	500	9
TRS-75S	3/4"	2.83	1.07	0.69	0.25	2.4	50	500	12
TRS-100S	1"	3.36	1.35	0.87	0.25	4.0	25	250	10
TRS-125S	1 1/4"	4.11	1.69	0.87	0.25	6.0	20	200	12
TRS-150S	1 1/2"	4.65	1.96	0.87	0.25	7.0	10	100	7
TRS-200S	2"	5.06	2.43	0.99	0.32	10.0		50	5
TRS-250S	2 1/2"	5.77	2.91	0.99	0.38	22.9		25	6
TRS-300S	3"	6.24	3.54	0.99	0.38	24.8		25	6
TRS-350S	3 1/2"	7.19	4.02	0.99	0.38	29.0		25	7
TRS-400S	4"	7.76	4.52	0.99	0.38	31.2		25	8

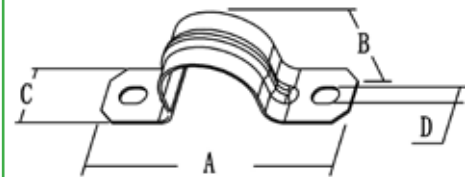

One Hole Strap




Features & Benefits:

- Used to support rigid conduit and IMC, liquid tight flexible metallic conduit, and liquid tight nonmetallic conduit (type B) to mounting surface.
- Malleable iron construction, Zinc plated.

Certifications: UL-2239



CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
ORS-50M	1/2"	1.98	0.67	0.97	4.9	100	1000	48.5
ORS-75M	3/4"	2.37	0.76	1.10	6.6	50	500	33.2
ORS-100M	1"	2.90	0.82	1.44	10.5	25	250	26.2
ORS-125M	1 1/4"	3.12	0.82	1.77	12.8	20	200	25.6
ORS-150M	1 1/2"	3.90	1.05	2.06	22.6	10	100	22.6
ORS-200M	2"	4.77	1.36	2.59	34.0		25	8.5
ORS-250M	2 1/2"	5.45	1.36	3.05	43.6		25	10.9
ORS-300M	3"	6.74	1.54	3.77	82.8		25	20.7
ORS-350M	3 1/2"	7.72	1.91	4.24	127.0		10	12.7
ORS-400M	4"	8.13	2.07	4.98	163.0		10	16.3
ORS-500M	5"	10.94	2.55	6.22	442.0		10	44.2
ORS-600M	6"	12.71	2.91	7.45	621.0		10	62.1

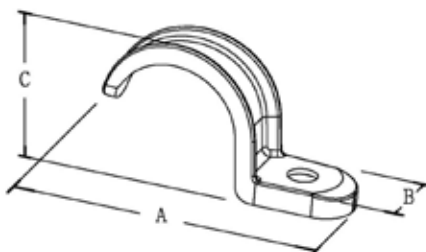

Clamp Back




Features & Benefits:

- Provide spacing between mounting surface and Rigid conduit/IMC.
- Use with Malleable iron one hole strap.
- Malleable iron, Zinc plated.

Certifications: UL-2239



CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
KB-50M	1/2"	2.06	1.01	0.44	6.5	25	250	16.2
KB-75M	3/4"	2.44	1.20	0.48	9.4	25	250	23.6
KB-100M	1"	2.92	1.31	0.56	13.2	25	250	33.1
KB-125M	1 1/4"	3.41	1.49	0.67	19.6	10	100	19.6
KB-150M	1 1/2"	3.78	1.52	0.76	26.4	10	100	26.4
KB-200M	2"	4.73	1.92	0.80	49.6	5	50	24.8
KB-250M	2 1/2"	5.48	2.42	0.80	66.0		25	16.5
KB-300M	3"	6.66	2.63	0.83	97.0		10	9.7
KB-350M	3 1/2"	7.12	2.87	1.03	128.0		10	12.8
KB-400M	4"	8.43	3.12	1.09	173.0		10	17.3
KB-500M	5"	10.78	3.68	1.30	312.0		10	31.2
KB-600M	6"	12.68	3.96	1.89	541.0		10	54.1

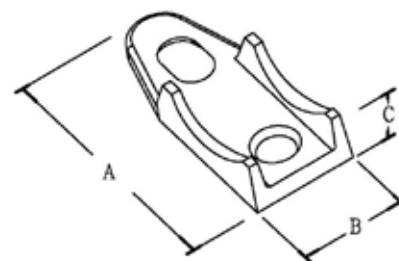


Conduit Bodies

Set Screw LB Type - EMT with Cover and Gasket



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LBE-50SC	1/2"	1	6 AWG	4.30	1.34	2.15	28	10	100	28
LBE-75SC	3/4"	2	6 AWG	5.09	1.54	2.43	35	10	50	18
LBE-100SC	1"	3	6 AWG	5.92	1.74	2.77	48	5	25	12
LBE-125SC	1 1/4"	3	2 AWG	7.89	2.49	3.67	91	2	10	9
LBE-150SC	1 1/2"	3	2 AWG	7.89	2.49	3.67	106	2	10	11
LBE-200SC	2"	3	2/0 AWG	10.13	3.10	4.28	280	1	5	14
LBE-250SC	2 1/2"	3	2/0 AWG	12.50	4.45	5.44	378		1	4
LBE-300SC	3"	3	4/0 AWG	12.50	4.45	5.68	413		1	4
LBE-350SC	3 1/2"	3	500 MCM	15.50	5.50	6.92	792		1	8
LBE-400SC	4"	3	500 MCM	15.50	5.50	6.92	796		1	8

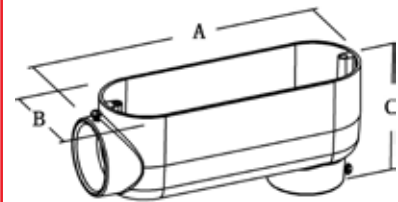


Threaded LB Type - RIGID/IMC with Cover and Gasket



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LB-50SC	1/2"	1	6 AWG	4.30	1.34	2.15	28	10	100	28
LB-75SC	3/4"	2	6 AWG	5.09	1.54	2.43	35	10	50	18
LB-100SC	1"	3	6 AWG	5.92	1.74	2.77	48	5	25	12
LB-125SC	1 1/4"	3	2 AWG	7.89	2.49	3.67	91	2	10	9
LB-150SC	1 1/2"	3	2 AWG	7.89	2.49	3.67	106	2	10	11
LB-200SC	2"	3	2/0 AWG	10.13	3.10	4.28	280	1	5	14
LB-250SC	2 1/2"	3	2/0 AWG	12.50	4.45	5.44	378		1	4
LB-300SC	3"	3	4/0 AWG	12.50	4.45	5.68	413		1	4
LB-350SC	3 1/2"	3	500 MCM	15.50	5.50	6.92	792		1	8
LB-400SC	4"	3	500 MCM	15.50	5.50	6.92	796		1	8

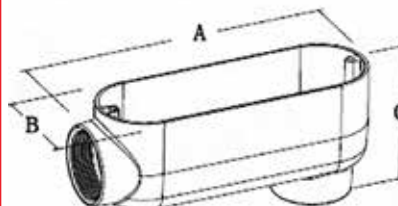

Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.

Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.


Conduit Bodies

LB Type - COMBO (EMT/RIGID/IMC)



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LBC-50SC	1/2"	1	6 AWG	4.30	1.34	2.15	28	10	100	28
LBC-75SC	3/4"	2	6 AWG	5.09	1.54	2.43	38	10	50	19
LBC-100SC	1"	3	6 AWG	5.92	1.74	2.77	80	5	25	20
LBC-125SC	1 1/4"	3	2 AWG	7.89	2.49	3.67	140	2	10	14
LBC-150SC	1 1/2"	3	2 AWG	7.89	2.49	3.67	150	2	10	15
LBC-200SC	2"	3	2/0 AWG	10.13	3.10	4.28	280	1	5	14

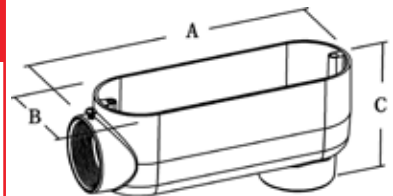

Features & Benefits:


- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.

Threaded C Type - RIGID/IMC with Cover and Gasket



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
C-250SC	2 1/2"	3	2/0 AWG	13.27	4.41	4.75	325		1	3
C-300SC	3"	3	4/0 AWG	13.27	4.41	4.75	354		1	3
C-350SC	3 1/2"	3	500 MCM	16.14	5.46	5.87	572		1	6
C-400SC	4"	3	500 MCM	16.14	5.46	5.87	609		1	6

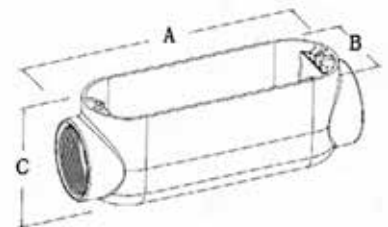

Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.

Conduit Bodies

C Type - COMBO (EMT/RIGID/IMC) with Cover and Gasket


Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
CC-50SC	1/2"	1	6 AWG	4.75	1.34	1.34	28	10	100	28
CC-75SC	3/4"	2	6 AWG	5.61	1.54	1.59	38	10	50	19
CC-100SC	1"	3	6 AWG	6.46	1.79	1.90	80	5	25	20
CC-125SC	1 1/4"	3	2 AWG	8.11	2.50	2.51	140	2	10	14
CC-150SC	1 1/2"	3	2 AWG	8.11	2.50	2.67	150	2	10	15
CC-200SC	2"	3	2/0 AWG	10.52	3.13	3.36	280	1	5	14

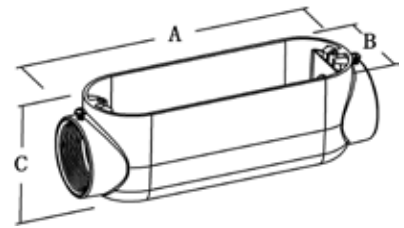

Threaded LL Type - RIGID/IMC with Cover and Gasket


Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LL-50SC	1/2"	1	6 AWG	4.39	2.04	1.34	34	10	100	34
LL-75SC	3/4"	2	6 AWG	5.14	2.29	1.59	46	10	50	23
LL-100SC	1"	3	6 AWG	5.91	2.65	1.90	76	5	25	19
LL-125SC	1 1/4"	3	2 AWG	7.68	3.42	2.51	140	2	10	14
LL-150SC	1 1/2"	3	2 AWG	7.68	3.42	2.67	150	2	10	15
LL-200SC	2"	3	2/0 AWG	10.04	4.19	3.36	280	1	5	14
LL-250SC	2 1/2"	3	2/0 AWG	12.71	4.41	4.44	372		1	4
LL-300SC	3"	3	4/0 AWG	12.71	4.41	4.44	418		1	4
LL-350SC	3 1/2"	3	500 MCM	15.02	5.46	5.58	744		1	7
LL-400SC	4"	3	500 MCM	15.02	5.46	5.58	722		1	7

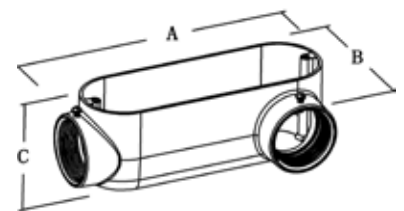

Conduit Bodies

LLC Type - COMBO (EMT/RIGID/IMC) with Cover and Gasket




Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LLC-50SC	1/2"	1	6 AWG	4.39	2.04	1.34	36	10	100	36
LLC-75SC	3/4"	2	6 AWG	5.14	2.29	1.59	46	10	50	23
LLC-100SC	1"	3	6 AWG	5.91	2.65	1.90	76	5	25	19
LLC-125SC	1 1/4"	3	2 AWG	7.68	3.42	2.51	150	2	10	15
LLC-150SC	1 1/2"	3	2 AWG	7.68	3.42	2.67	160	2	10	16
LLC-200SC	2"	3	2/0 AWG	10.04	4.19	3.36	280	1	5	14

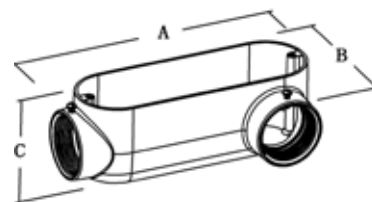

Threaded LR Type - RIGID/IMC with Cover and Gasket

Features & Benefits:




- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LR-50SC	1/2"	1	6 AWG	4.39	2.04	1.34	34	10	100	34
LR-75SC	3/4"	2	6 AWG	5.14	2.29	1.59	46	10	50	23
LR-100SC	1"	3	6 AWG	5.91	2.65	1.90	76	5	25	19
LR-125SC	1 1/4"	3	2 AWG	7.68	3.42	2.51	140	2	10	14
LR-150SC	1 1/2"	3	2 AWG	7.68	3.42	2.67	150	2	10	15
LR-200SC	2"	3	2/0 AWG	10.04	4.19	3.36	280	1	5	14
LR-250SC	2 1/2"	3	2/0 AWG	12.71	4.41	4.44	372		1	4
LR-300SC	3"	3	4/0 AWG	12.71	4.41	4.44	418		1	4
LR-350SC	3 1/2"	3	500 MCM	15.02	5.46	5.58	744		1	7
LR-400SC	4"	3	500 MCM	15.02	5.46	5.58	722		1	7

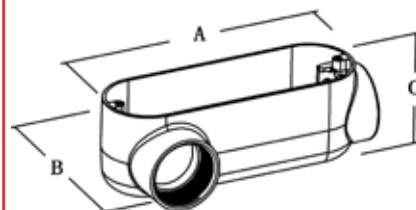

Conduit Bodies

LRC Type - COMBO (EMT/RIGID/IMC) with Cover and Gasket


Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LRC-50SC	1/2"	1	6 AWG	4.39	2.04	1.34	36	10	100	36
LRC-75SC	3/4"	2	6 AWG	5.14	2.29	1.59	46	10	50	23
LRC-100SC	1"	3	6 AWG	5.91	2.65	1.90	76	5	25	19
LRC-125SC	1 1/4"	3	2 AWG	7.68	3.42	2.51	150	2	10	15
LRC-150SC	1 1/2"	3	2 AWG	7.68	3.42	2.67	160	2	10	16
LRC-200SC	2"	3	2/0 AWG	10.04	4.19	3.36	280	1	5	14

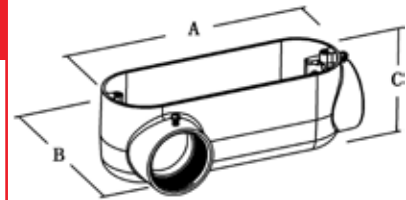

Conduit Bodies

Threaded T Type - RIGID/IMC with Cover and Gasket


Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A

CAT#	TRADE SIZE	MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
T-50SC	1/2"	1	6 AWG	4.75	2.04	1.34	34	10	100	34
T-75SC	3/4"	2	6 AWG	5.61	2.29	1.59	46	10	50	23
T-100SC	1"	3	6 AWG	6.46	2.65	1.90	76	5	25	19
T-125SC	1 1/4"	3	2 AWG	8.11	3.42	2.51	140	2	10	14
T-150SC	1 1/2"	3	2 AWG	8.11	3.42	2.67	150	2	10	15
T-200SC	2"	3	2/0 AWG	10.52	4.19	3.36	280	1	5	14
T-250SC	2 1/2"	3	2/0 AWG	13.27	4.41	4.75	326		1	3
T-300SC	3"	3	4/0 AWG	13.27	4.41	4.75	354		1	3
T-350SC	3 1/2"	3	500 MCM	16.14	5.46	5.87	572		1	6
T-400SC	4"	3	500 MCM	16.14	5.46	5.87	609		1	6

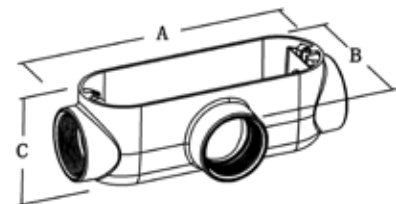

T Type - COMBO (EMT/RIGID/IMC) with Cover and Gasket

Features & Benefits:


- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit/IMC.
- Copper-free Aluminum construction with Aluminum covers and Neoprene gaskets and steel screws.



Certifications: UL-514A



CAT#	TRADE SIZE	WIRE MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
TC-50SC	1/2"	1	6 AWG	4.75	2.04	1.34	36	10	100	36
TC-75SC	3/4"	2	6 AWG	5.61	2.29	1.59	46	10	50	23
TC-100SC	1"	3	6 AWG	6.46	2.65	1.90	76	5	25	19
TC-125SC	1 1/4"	3	2 AWG	8.11	3.42	2.51	150	2	10	15
TC-150SC	1 1/2"	3	2 AWG	8.11	3.42	2.67	160	2	10	16
TC-200SC	2"	3	2/0 AWG	10.52	4.19	3.36	280	1	5	14

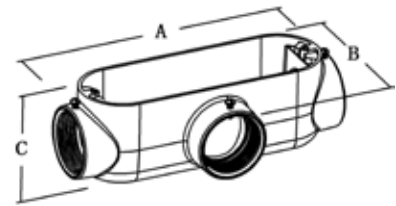

TBC Type - COMBO (EMT/RIGID/IMC) with Cover and Gasket

Features & Benefits:


- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit.



Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
TBC-50SC	1/2"			4.75	1.34	2.08	33.1	10	100	33.1
TBC-75SC	3/4"	3	6 AWG	5.61	1.54	2.34	46.0	10	50	23.0
TBC-100SC	1"	3	4 AWG	6.46	1.79	2.64	64.4	5	25	16.1
TBC-125SC	1 1/4"	3	2 AWG	8.11	2.50	3.52	126.0	2	10	12.6
TBC-150SC	1 1/2"	3	2 AWG	8.11	2.50	3.52	125.0	2	10	12.5
TBC-200SC	2"	3	2/0 AWG	10.52	3.13	4.51	244.0	1	5	12.2

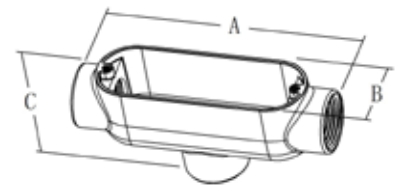

XC Type - COMBO (EMT/RIGID/IMC) with Cover and Gasket


Features & Benefits:

- Acts as pull outlets for conductors being installed and allows for changing direction and making bends in a conduit system.
- Die-cast copper-free aluminum construction is lightweight and corrosion resistant for long reliable service.
- Epoxy powder coat finish provides additional corrosion resistance.
- Rated for wet locations when used with cover and gasket to join threaded rigid conduit.



Certifications:UL-514A

CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
XC-50SC	1/2"			4.75	2.72	1.36	36.4	10	100	36.4
XC-75SC	3/4"	3	6 AWG	5.61	3.05	1.63	52.6	10	50	26.3
XC-100SC	1"	3	4 AWG	6.46	3.54	1.89	72.8	5	25	18.2
XC-125SC	1 1/4"	3	2 AWG	8.11	4.53	2.50	146.0	2	10	14.6
XC-150SC	1 1/2"	3	2 AWG	8.11	4.53	2.50	146.0	2	10	14.6
XC-200SC	2"	3	2/0 AWG	10.52	5.35	3.41	264.0	1	5	13.2

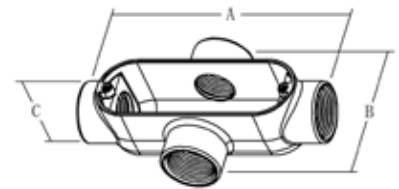

Threaded LB Type-Malleable Iron


Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and Neoprene gasket.
- * - Roller optional from size of 1-1/4" and above to facilitate cable pulling.



Certifications:UL-514A

CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
LB-50MSSC	1/2"	N/A	N/A	4.69	2.18	1.36	76.0		10	7.6
LB-75MSSC	3/4"	3	6 AWG	5.42	2.36	1.57	104.0		10	10.4
LB-100MSSC	1"	3	4 AWG	6.28	2.86	1.79	144.0		5	7.2
LBR-125MSSC*	1 1/4"	3	2 AWG	8.12	3.49	2.52	304.0		5	15.2
LBR-150MSSC*	1 1/2"	3	1/0 AWG	8.15	3.69	2.52	336.0		5	16.8
LBR-200MSSC*	2"	3	4/0 AWG	10.53	4.52	3.15	600.0		1	6.0
LBR-250MSSC*	2 1/2"	3	300MCM	13.76	5.39	4.45	1120.0		1	11.2
LBR-300MSSC*	3"	3	400MCM	13.82	6.18	4.45	1340.0		1	13.4
LBR-350MSSC*	3 1/2"	3	500MCM	16.65	7.19	5.53	2250.0		1	22.5
LBR-400MSSC*	4"	3	500MCM	16.65	7.36	5.53	2430.0		1	24.3

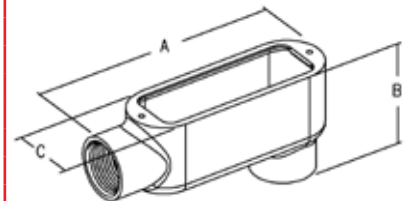

Threaded C Type-Malleable Iron




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and Neoprene gasket.
- * - Roller optional from size of 1-1/4" and above to facilitate cable pulling.

Certifications:UL-514A

CAT#	TRADE SIZE IN	WIRE MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
C-50MSSC	1/2"	N/A	N/A	5.43	1.46	1.36	79.0	10		7.9
C-75MSSC	3/4"	3	6 AWG	6.18	1.65	1.57	108.0	10		10.8
C-100MSSC	1"	3	4 AWG	7.16	1.98	1.79	150.0	5		7.5
CR-125MSSC*	1 1/4"	3	2 AWG	9.00	2.60	2.52	288.5	2		5.7
CR-150MSSC*	1 1/2"	3	1/0 AWG	9.07	2.80	2.52	346.0	2		6.9
CR-200MSSC*	2"	3	4/0 AWG	11.54	3.52	3.15	600.0	1		6.0
CR-250MSSC*	2 1/2"	3	300MCM	15.28	3.98	4.45	1160.0	1		11.6
CR-300MSSC*	3"	3	300MCM	15.39	4.65	4.45	1310.0	1		13.1
CR-350MSSC*	3 1/2"	3	350MCM	18.30	5.43	5.53	2230.0	1		22.3
CR-400MSSC*	4"	3	350MCM	18.30	5.74	5.53	2360.0	1		23.6

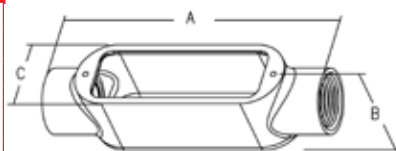

Threaded LL Type-Malleable Iron




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and neoprene gasket

Certifications:UL-514A

CAT#	TRADE SIZE IN	WIRE MAX QTY	WIRE MAX SIZE	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
								INNER CASE	MASTER CASE	WT LBS
LL-50MSSC	1/2"	N/A	N/A	4.69	1.46	2.08	80.0	10		8.0
LL-75MSSC	3/4"	3	6 AWG	5.42	1.65	2.31	108.0	10		10.8
LL-100MSSC	1"	3	4 AWG	6.28	1.98	2.68	154.0	5		7.7
LL-125MSSC	1 1/4"	3	2 AWG	8.12	2.60	3.41	330.0	2		6.6
LL-150MSSC	1 1/2"	3	2 AWG	8.15	2.80	3.45	365.0	2		7.3
LL-200MSSC	2"	3	4/0 AWG	10.53	3.52	4.15	630.0	1		6.3
LL-250MSSC	2 1/2"	3	300MCM	13.76	3.98	5.86	1040.0	1		10.4
LL-300MSSC	3"	3	350MCM	13.82	4.65	5.92	1330.0	1		13.3
LL-350MSSC	3 1/2"	3	350MCM	16.65	5.43	7.14	2160.0	1		21.6
LL-400MSSC	4"	3	350MCM	16.65	5.74	7.19	2220.0	1		22.2

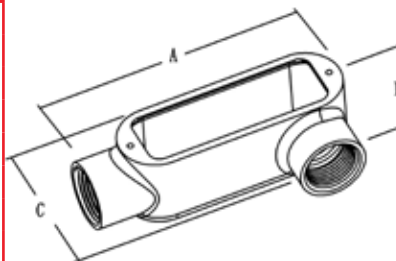

Threaded LR Type-Malleable Iron




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and neoprene gasket

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
LR-50MSSC	1/2"	N/A	N/A	4.69	1.46	2.08	80.0		10	8.0
LR-75MSSC	3/4"	3	6 AWG	5.42	1.65	2.31	108.0		10	10.8
LR-100MSSC	1"	3	4 AWG	6.28	1.98	2.68	154.0		5	7.7
LR-125MSSC	1 1/4"	3	2 AWG	8.12	2.60	3.41	330.0		2	6.6
LR-150MSSC	1 1/2"	3	2 AWG	8.15	2.80	3.45	365.0		2	7.3
LR-200MSSC	2"	3	4/0 AWG	10.53	3.52	4.15	630.0		1	6.3
LR-250MSSC	2 1/2"	3	300MCM	13.76	3.98	5.86	1040.0		1	10.4
LR-300MSSC	3"	3	350MCM	13.82	4.65	5.92	1330.0		1	13.3
LR-350MSSC	3 1/2"	3	350MCM	16.65	5.43	7.14	2160.0		1	21.6
LR-400MSSC	4"	3	350MCM	16.65	5.74	7.19	2220.0		1	22.2

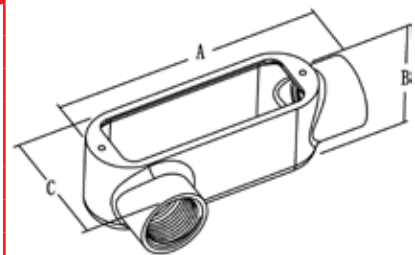

Threaded T Type-Malleable Iron




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and neoprene gasket

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
T-50MSSC	1/2"	N/A	N/A	5.43	1.46	2.08	88.0		10	8.8
T-75MSSC	3/4"	3	6 AWG	6.18	1.65	2.31	117.0		10	11.7
T-100MSSC	1"	3	4 AWG	7.16	1.98	2.68	368.0		5	18.4
T-125MSSC	1 1/4"	3	2 AWG	9.00	2.72	3.41	295.0		2	5.9
T-150MSSC	1 1/2"	3	1 AWG	9.07	2.80	3.45	340.0		2	6.8
T-200MSSC	2"	3	2/0 AWG	11.54	3.52	4.15	580.0		1	5.8
T-250MSSC	2 1/2"	3	300MCM	15.28	3.98	5.86	1130.0		1	11.3
T-300MSSC	3"	3	300MCM	15.39	4.65	5.92	1310.0		1	13.1
T-350MSSC	3 1/2"	3	350MCM	18.30	5.43	7.14	2330.0		1	23.3
T-400MSSC	4"	3	350MCM	18.30	5.74	7.19	2430.0		1	24.3

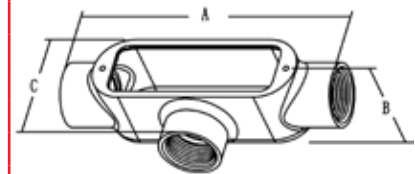

Threaded X Type-Malleable Iron




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and neoprene gasket

Certifications:UL-514A

CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
X-50MSSC	1/2"	N/A	N/A	5.43	1.75	2.82	112.0		5	5.6
X-75MSSC	3/4"	3	6 AWG	6.18	1.99	3.06	140.0		10	14.0
X-100MSSC	1"	3	4 AWG	7.16	2.25	3.56	198.0		5	9.9
X-125MSSC	1 1/4"	3	2 AWG	9.00	2.72	4.29	301.0		1	3.0
X-150MSSC	1 1/2"	3	1/0 AWG	9.07	2.80	4.37	370.0		1	3.7
X-200MSSC	2"	3	2/0 AWG	11.54	3.52	5.15	600.0		1	6.0

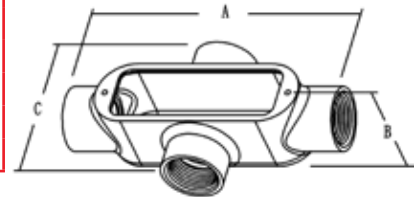

Threaded TB Type-Malleable Iron




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with cover and gasket
- Malleable iron with stamped steel cover and neoprene gasket

Certifications:UL-514A

CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
TB-50MSSC	1/2"	N/A	N/A	5.43	2.21	1.36	88.0		10	8.8
TB-75MSSC	3/4"	3	6 AWG	6.18	2.39	1.57	121.0		10	12.1
TB-100MSSC	1"	3	6 AWG	7.16	2.86	1.79	176.0		5	8.8
TB-125MSSC	1 1/4"	3	6 AWG	9.00	3.49	2.52	290.0		2	5.8
TB-150MSSC	1 1/2"	3	4 AWG	9.07	3.72	2.52	355.0		1	3.5
TB-200MSSC	2"	3	1/0 AWG	11.54	4.53	3.15	580.0		1	5.8

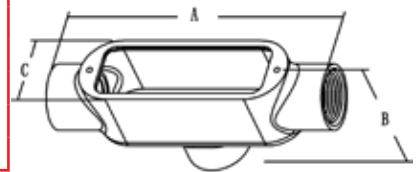

Gray Iron Conduit Bodies

LB Type-Form 7




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
LB17	1/2"	N/A	N/A	4.49	2.22	1.35	84.0		10	8.4
LB27	3/4"	3	6 AWG	5.22	2.49	1.65	136.0		10	13.6
LB37	1"	3	4 AWG	6.17	2.85	1.79	192.0		5	9.6
LB47	1 1/4"	3	2 AWG	6.50	3.24	2.20	257.0		10	25.7
LB57	1 1/2"	3	2 AWG	7.09	3.54	2.45	315.0		10	31.5
LB67	2"	3	1/0 AWG	8.11	4.13	3.01	498.0		5	24.9
LB77	2 1/2"	3	3/0 AWG	10.71	5.26	4.25	1010.0		1	10.1
LB87	3"	3	3/0 AWG	10.71	6.02	4.25	1250.0		1	12.5
LB97	3 1/2"	3	300MCM	12.76	6.59	5.31	1650.0		1	16.5
LB107	4"	3	300MCM	12.76	7.10	5.31	1720.0		1	17.2

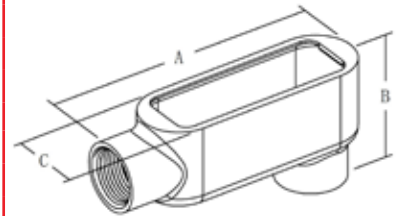

C Type-Form 7




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
C17	1/2"	N/A	N/A	5.31	1.40	1.35	89.0		10	8.9
C27	3/4"	3	6 AWG	6.16	1.65	1.65	140.0		10	14.0
C37	1"	3	4 AWG	7.30	1.79	1.79	202.0		5	10.1
C47	1 1/4"	3	2 AWG	7.43	2.20	2.20	284.0		10	28.4
C57	1 1/2"	3	2AWG	8.16	2.45	2.45	330.0		10	33.0
C67	2"	3	1/0 AWG	9.13	3.01	3.01	504.0		5	25.2
C77	2 1/2"	3	2/0 AWG	12.36	4.25	4.25	990.0		1	9.9
C87	3"	3	2/0 AWG	12.36	4.25	4.25	1250.0		1	12.5
C97	3 1/2"	3	250MCM	14.49	5.31	5.31	1650.0		1	16.5
C107	4"	3	250MCM	14.49	5.31	5.31	1780.0		1	17.8

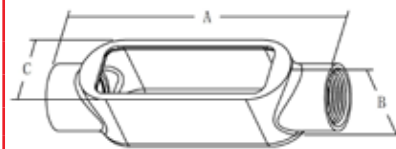

T Type-Form 7




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
T17	1/2"	N/A	N/A	5.31	1.77	2.48	111.0		10	11.1
T27	3/4"	3	6 AWG	6.16	2.01	2.72	180.0		10	18.0
T37	1"	3	4 AWG	7.30	2.28	3.00	258.0		5	12.9
T47	1 1/4"	3	2 AWG	7.43	2.31	3.13	308.0		10	30.8
T57	1 1/2"	3	2 AWG	8.16	2.60	3.39	381.0		10	38.1
T67	2"	3	1/0 AWG	9.13	3.13	4.02	558.0		5	27.9
T77	2 1/2"	3	2/0 AWG	12.36	3.66	5.85	1120.0		1	11.2
T87	3"	3	2/0 AWG	12.36	4.45	5.85	1450.0		1	14.5
T97	3 1/2"	3	250MCM	14.49	4.92	6.98	1630.0		1	16.3
T107	4"	3	250MCM	14.49	4.92	6.98	2310.0		1	23.1

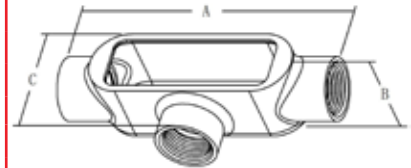

LL Type-Form 7




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
LL17	1/2"	N/A	N/A	4.49	1.40	2.28	86.0		10	8.6
LL27	3/4"	3	6 AWG	5.22	1.65	2.49	136.0		10	13.6
LL37	1"	3	4 AWG	6.17	1.79	2.76	198.0		5	9.9
LL47	1 1/4"	3	2 AWG	6.50	2.20	3.13	251.0		10	25.1
LL57	1 1/2"	3	2 AWG	7.09	2.45	3.39	326.0		10	32.6
LL67	2"	3	1/0 AWG	8.11	3.01	4.02	500.0		5	25.0
LL77	2 1/2"	3	250MCM	10.71	4.25	5.85	1010.0		1	10.1
LL87	3"	3	250MCM	10.71	4.25	5.85	1160.0		1	11.6
LL97	3 1/2"	3	350MCM	12.76	5.31	6.98	1650.0		1	16.5
LL107	4"	3	350MCM	12.76	5.31	6.98	1720.0		1	17.2

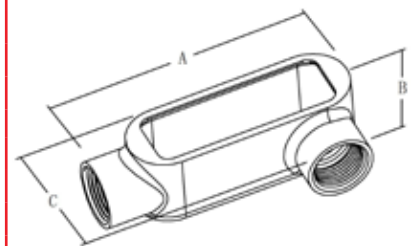

LR Type-Form 7




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
LR17	1/2"	N/A	N/A	4.49	1.40	2.28	86.0		10	8.6
LR27	3/4"	3	6 AWG	5.22	1.65	2.49	136.0		10	13.6
LR37	1"	3	4 AWG	6.17	1.79	2.76	198.0		5	9.9
LR47	1 1/4"	3	2 AWG	6.50	2.20	3.13	251.0		10	25.1
LR57	1 1/2"	3	2 AWG	7.09	2.45	3.39	326.0		10	32.6
LR67	2"	3	1/0 AWG	8.11	3.01	4.02	500.0		5	25.0
LR77	2 1/2"	3	250MCM	10.71	4.25	5.85	1010.0		1	10.1
LR87	3"	3	250MCM	10.71	4.25	5.85	1160.0		1	11.6
LR97	3 1/2"	3	350MCM	12.76	5.31	6.98	1650.0		1	16.5
LR107	4"	3	350MCM	12.76	5.31	6.98	1720.0		1	17.2

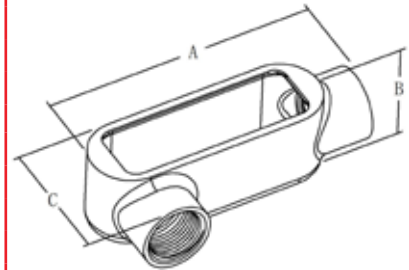

TB Type-Form 7




Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron

Certifications:UL-514A



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
TB17	1/2"	N/A	N/A	5.31	2.59	1.65	110.0		10	11.0
TB27	3/4"	3	6 AWG	6.16	2.84	1.89	169.0		10	16.9
TB37	1"	3	4 AWG	7.30	3.25	2.02	248.0		10	24.8
TB47	1 1/4"	3	2 AWG	7.43	3.26	2.20	306.0		5	15.3
TB57	1 1/2"	3	2 AWG	8.16	3.56	2.45	378.0		5	18.9
TB67	2"	3	1/0 AWG	9.13	4.14	3.01	570.0		5	28.5

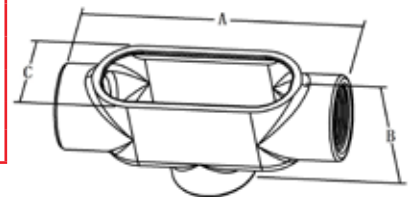

X Type-Form 7




Certifications:UL-514A

Features & Benefits:

- Threaded NPT tapered hubs for rigid and IMC conduit.
- Make bends and change direction for conduit system
- Flat back suitable for mounting on surface
- Rated for Wet Locations when used with gasketed cover.
- Gray Iron



CAT#	TRADE SIZE IN	WIRE		A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
		MAX QTY	MAX SIZE					INNER CASE	MASTER CASE	WT LBS
X17	1/2"	N/A	N/A	5.31	1.77	3.31	127.0		10	12.7
X27	3/4"	3	6 AWG	6.16	2.01	3.56	197.0		10	19.7
X37	1"	3	4 AWG	7.30	2.28	3.98	271.0		10	27.1
X47	1 1/4"	3	2 AWG	7.43	2.31	4.06	348.0		5	17.4
X57	1 1/2"	3	2 AWG	8.16	2.60	4.34	422.0		5	21.1
X67	2"	3	1/0 AWG	9.13	3.13	5.04	622.0		5	31.1

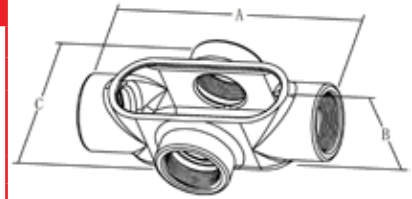

Form 7 Conduit Body Cover with Integral Gasket

Features & Benefits:

- Integral Gasket.
- Steel, Zinc plated



Certifications:UL-514A

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
170	1/2"	3.66	1.35	0.27	15.4	10	100	15.4
270	3/4"	4.29	1.55	0.27	18.3	10	100	18.3
370	1"	5.03	1.79	0.28	27.2	5	50	13.6
470	1 1/4"	5.57	2.19	0.28	29.2		25	7.3
570	1 1/2"	6.06	2.45	0.28	34.5		20	6.9
670	2"	7.07	3.01	0.28	46.5		20	9.3
870	2 1/2" & 3"	9.06	4.25	0.50	109.0		10	10.9
970	3 1/2" & 4"	11.00	5.31	0.64	147.0		10	14.7



Form 7 Conduit Body Cover with Integral Gasket

Features & Benefits:

- Integral Gasket.
- Gray iron construction



Certifications:UL-514A

CAT#	TRADE SIZE IN	A LENGTH IN	B WIDTH IN	C DEPTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
170G	1/2"	3.66	1.35	0.27	33.0	10	100	33.0
270G	3/4"	4.29	1.55	0.27	40.0	10	100	40.0
370G	1"	5.03	1.79	0.28	61.6	5	50	30.8
470G	1 1/4"	5.57	2.19	0.28	77.6		25	19.4
570G	1 1/2"	6.06	2.45	0.28	106.5		20	21.3
670G	2"	7.07	3.01	0.28	152.5		20	30.5
870G	2 1/2" & 3"	9.06	4.25	0.50	213.0		10	21.3
970G	3 1/2" & 4"	11.00	5.31	0.64	314.0		10	31.4



Non-Metallic Liquidtight Fittings

Straight Connectors




Features & Benefits:

- Liquid-tight connectors are used to terminate and seal liquid-tight flexible Type b Non-metallic conduit to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Resists salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.
- For use in dry or wet locations.
- No disassembly required.
- Reusable.
- Straight type - gray



Certifications: UL-514B

CAT#	TRADE SIZE	A Width	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
NMLT-1038	3/8"	2.04	1.43	2.50	25	100	2.50
NMLT-1050	1/2"	2.11	1.43	2.50	25	100	2.50
NMLT-1075	3/4"	2.20	1.68	3.40	25	100	3.40
NMLT-1100	1"	2.28	1.99	5.80	5	50	2.90
NMLT-1125	1 1/4"	2.46	2.39	8.20	5	25	2.05
NMLT-1150	1 1/2"	2.72	2.65	10.80	2	10	1.08
NMLT-1200	2"	3.05	3.22	18.20	2	10	1.82

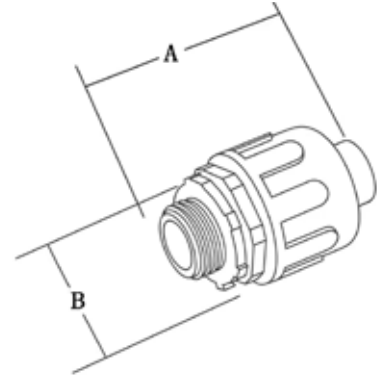

90° Connectors




Features & Benefits:

- Liquid-tight connectors are used to terminate and seal liquid-tight flexible Type b Non-metallic conduit to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Resists salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.
- For use in dry or wet locations.
- No disassembly required.
- Reusable.
- 90° type - gray



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B LENGTH	C LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
NMLT-9038	3/8"	2.84	0.50	2.03	2.80	10	100	2.80
NMLT-9050	1/2"	2.84	0.50	2.03	2.80	10	100	2.80
NMLT-9075	3/4"	3.25	0.50	2.33	4.00	10	100	4.00
NMLT-9100	1"	3.54	0.60	2.95	7.40	10	50	3.70
NMLT-9125	1 1/4"	4.75	0.76	5.20	12.80	5	25	3.20
NMLT-9150	1 1/2"	4.75	0.80	5.20	15.60	2	10	1.56
NMLT-9200	2"	5.40	0.86	5.80	25.60	2	10	2.56

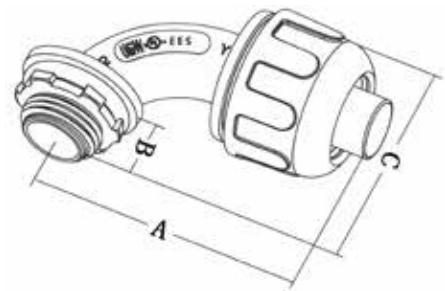

Metallic Liquidtight Fittings

Zinc Die Cast Straight Connectors




Features & Benefits:

- Used to terminate and seal Liquid-Tight Flexible Metallic Conduits to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Connectors can be used with tapered thread female entry or non-threaded knock-out using the provided sealing washer and locknut.
- For use in dry or wet locations.
- No disassembly required.
- Reusable.
- Zinc Die Cast Construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A Width	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
LT-38	3/8"	1.24	1.28	12.89	20	200	25.78
LT-50	1/2"	1.32	1.34	13.86	20	200	27.72
LT-75	3/4"	1.35	1.62	18.70	10	100	18.70
LT-100	1"	1.71	1.92	31.77	5	50	15.88
LT-125	1 1/4"	1.84	2.35	47.08	5	50	23.54
LT-150	1 1/2"	1.86	2.63	58.08	2	20	11.62
LT-200	2"	1.95	3.18	78.98	2	20	15.79
LT-250	2 1/2"	2.69	3.52	141.00		1	1.41
LT-300	3"	2.90	4.24	198.00		1	1.98
LT-350	3 1/2"	3.01	4.88	262.00		1	2.62
LT-400	4"	3.18	5.31	299.00		1	2.99

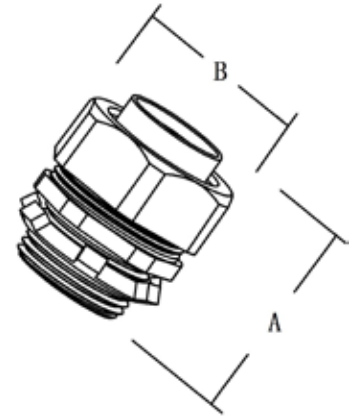

Zinc Die Cast 90° Connectors




Features & Benefits:

- Used to terminate and seal Liquid-Tight Flexible Metallic and Non-Metallic Type B Conduits to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Connectors can be used with tapered thread female entry or non-threaded knock-out using the provided sealing washer and locknut.
- For use in dry or wet locations.
- No disassembly required.
- Reusable.
- Zinc Die Cast Construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B WIDTH	C LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
LT90-38	3/8"	2.40	1.28	1.99	16.61	10	100	16.61
LT90-50	1/2"	2.42	1.34	2.08	16.76	10	100	16.76
LT90-75	3/4"	2.50	1.62	2.36	22.39	10	100	22.39
LT90-100	1"	3.08	1.92	2.19	45.14	5	50	22.57
LT90-125	1 1/4"	3.63	2.35	3.29	75.24	2	20	15.05
LT90-150	1 1/2"	3.98	2.63	3.72	90.86	2	20	18.17
LT90-200	2"	4.75	3.18	4.36	126.72	1	10	12.67
LT90-250	2 1/2"	5.60	3.52	5.20	209.00		1	2.09
LT90-300	3"	6.47	4.24	5.91	292.60		1	2.93
LT90-350	3 1/2"	7.33	4.88	6.57	408.00		1	4.08
LT90-400	4"	7.56	5.31	6.93	484.00		1	4.84

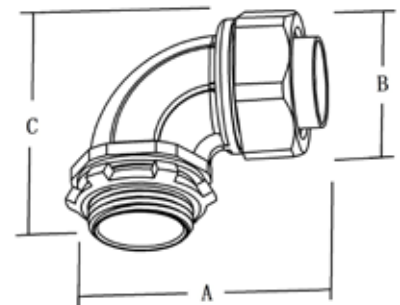

Metallic Liquidtight Fittings

Malleable Iron Straight Connectors with Insulated Throat




Features & Benefits:

- Used to terminate and seal Liquid-Tight Flexible Metallic Conduits to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Connectors can be used with tapered thread female entry or non-threaded knock-out using the provided sealing washer and locknut.
- For use in dry or wet locations.
- Malleable Iron Construction.



Certifications: UL-514B

CAT#	TRADE SIZE	B Width	A LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
470S	3/8"	1.18	1.72	15.5	20	200	31
471S	1/2"	1.36	1.73	16.5	20	200	33
472S	3/4"	1.61	1.81	25	10	100	25
473S	1"	1.89	1.85	36	5	50	18
474S	1 1/4"	2.39	2.06	56	5	50	28
475S	1 1/2"	2.62	3.38	75	2	20	15
476S	2"	3.24	2.49	110	2	20	22
477S	2 1/2"	3.89	3.21	200		1	2
478S	3"	4.74	3.37	300		1	3
479S	3 1/2"	5.31	3.40	400		1	4
480S	4"	5.82	3.68	500		1	5

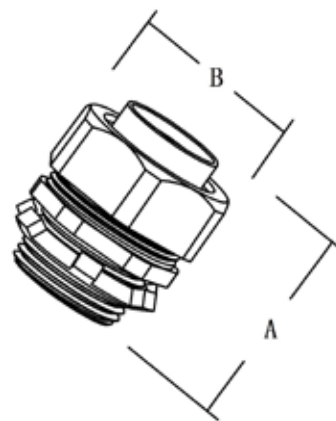

Malleable Iron 45° Connectors with Insulated Throat




Features & Benefits:

- Used to terminate and seal Liquid-Tight Flexible Metallic Conduits to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Connectors can be used with tapered thread female entry or non-threaded knock-out using the provided sealing washer and locknut.
- For use in dry or wet locations.
- 45° Bend Radius.
- Malleable Iron Construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B WIDTH	C LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
230S	3/8"	1.18	1.39	2.51	24	10	100	24
231S	1/2"	1.36	1.50	2.51	28	10	100	28
232S	3/4"	1.61	1.73	2.70	42	10	100	42
233S	1"	1.89	2.11	3.05	53	5	50	26
234S	1 1/4"	2.39	2.56	3.65	110	2	20	22
235S	1 1/2"	2.62	2.77	4.01	160	2	20	32
236S	2"	3.24	3.38	4.01	245	2	20	49
237S	2 1/2"	3.89	4.68	4.64	500		1	5
238S	3"	4.74	5.33	7.01	700		1	7
239S	3 1/2"	5.31	5.81	7.33	1000		1	10
240S	4"	5.82	6.42	8.20	1200		1	12



Metallic Liquidtight Fittings

Malleable Iron 90° Connectors with Insulated Throat


Features & Benefits:

- Used to terminate and seal Liquid-Tight Flexible Metallic Conduits to either an oil-tight, liquid-tight or rain-tight box or enclosure.
- Connectors can be used with tapered thread female entry or non-threaded knock-out using the provided sealing washer and locknut.
- For use in dry or wet locations.
- 90° Bend Radius.
- Malleable Iron Construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A LENGTH	B WIDTH	C LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
490S	3/8"	1.18	1.96	2.47	26	10	100	26
491S	1/2"	1.36	2.10	2.54	28	10	100	28
492S	3/4"	1.61	2.45	2.82	41	10	100	41
493S	1"	1.89	2.83	3.08	62	5	50	31
494S	1 1/4"	2.39	3.15	3.53	100	2	20	20
495S	1 1/2"	2.62	3.50	4.17	125	2	20	25
496S	2"	3.24	4.02	4.69	190	1	10	19
497S	2 1/2"	3.89	6.23	6.74	500		1	5
498S	3"	4.74	6.91	7.52	700		1	7
499S	3 1/2"	5.31	7.57	7.93	900		1	9
500S	4"	5.82	8.07	8.72	1400		1	14

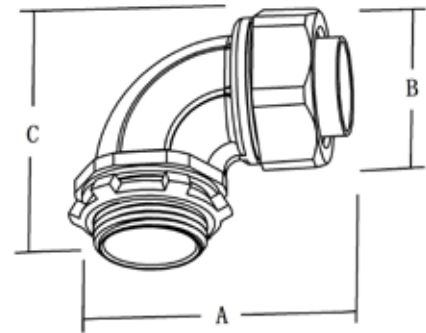

Sealing Rings




Features & Benefits:

- Sealing rings are used to form a liquid tight seal with a connector to a box or enclosure.
- Zinc Plated Steel construction.
- NBR Gasket



Certifications: UL-514B

CAT#	TRADE SIZE	A Width	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
SR-50	1/2"	1.14	0.16	1.008	250	2500	25.19
SR-75	3/4"	1.37	0.16	1.289	200	2000	25.96
SR-100	1"	1.62	0.16	1.430	150	1500	21.45
SR-125	1 1/4"	1.98	0.16	1.914	100	1000	19.14
SR-150	1 1/2"	2.25	0.16	2.486	50	500	12.43
SR-200	2"	2.75	0.16	2.882	50	500	14.41
SR-250	2 1/2"	3.48	0.19	6.49		100	6.49
SR-300	3"	4.24	0.19	8.47		100	8.47
SR-350	3 1/2"	4.57	0.19	10.26		50	5.06
SR-400	4"	5.24	0.19	10.98		50	5.50
SR-500	5"	6.56	0.20	32		5	1.6
SR-600	6"	7.75	0.20	36		5	1.8

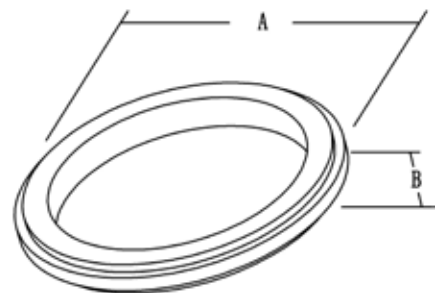

Top-Flex 1 Tubing

Non-Metallic Tubing



Indoor or outdoor use. Hazardous Locations - Where necessary for flexible connections within hazardous locations per the following:
 Class 1, Div. 2 - 2005 NEC 501.10(B)(2) Class 2, Div. 1 - 2005 NEC 502.10(A)(2) Class 3, Div. 2 - 2005 NEC 502.10(B)(2) Class 3, Div. 1 - 2005 NEC 503.10(A)(2) Class 3, Div. 2 - 2005 NEC 503.10(B)

Features & Benefits:



- Easy to cut and install.
- Smooth Interior: Facilitates easy wire pulling.
- Suitable for interior or exterior, direct burial, concrete, and HVAC installations.
- Resists corrosion, abrasion, oil, water, acid, and metal shavings, for use in rough environments.
- UL Type B flexible non-metallic liquid-tight conduit.
- Integral rigid and flexible PVC construction.

Certifications: UL-1660

CAT#	TRADE SIZE		OUTSIDE DIAMETER		INSIDE DIAMETER		WALL THICKNESS	WT /100 ft	PACKAGE INFORMATION	
	IN	UNIT	MIN IN	MAX IN	MIN IN	MAX IN			MASTER CASE	WT LBS
HF138	3/8"	ROLL	.690	.710	.484	.504	.21	10	100'	10
HF112	1/2"	ROLL	.820	.840	.622	.642	.21	13	100'	13
HF112R	1/2"	REEL	.820	.840	.622	.642	.21	13	1000'	130
HF134	3/4"	ROLL	1.030	1.050	.820	.840	.21	18	100'	18
HF134R	3/4"	REEL	1.030	1.050	.820	.840	.21	18	800'	144
HF11	1"	ROLL	1.290	1.315	1.041	1.066	.25	25	100'	25
HF11R	1"	REEL	1.290	1.315	1.041	1.066	.25	25	500'	160
HF114	1 1/4"	ROLL	1.630	1.660	1.380	1.410	.25	33	100	33
HF1112	1 1/2"	ROLL	1.865	1.900	1.575	1.600	.30	46	50'	23
HF12	2"	ROLL	2.340	2.375	2.020	2.045	.33	60	50'	30

AC Disconnect



Features & Benefits:

- AC Disconnect, 60 Amp Non-Fused Pullout, 120/240 Volt, Heavy Duty Steel Enclosure, Powder coated for superior protection and durability, UL Listed, Consult a licensed Electrician for installation instructions
- UL LISTED For Wet Locations
- Unique Pull down door helps keep moisture and debris from entering



CAT#	DESCRIPTION	PACKAGE INFORMATION	
		MASTER CASE	WT LBS
ACD49	AC DISCONNECT, 60AMP, NON-FUSED PULLOUT 120/240	6	5

Liquidtight Conduit

Metallic




Features & Benefits:

- For use in damp or wet locations, suitable for commercial and industrial use Non-UL
- Crush & corrosion resistant steel inner core for lasting mechanical protection.
- EF PVC jacket is oil and sunlight resistant, steel core.
- Smooth Interior: Facilitates easy wire pulling.
- Non-UL

Certifications: UL-360

CAT#	TRADE	UNIT	OUTSIDE DIAMETER		INSIDE DIAMETER		WT /100 ft LBS	PACKAGE INFORMATION	
	SIZE IN		MIN IN	MAX IN	MIN IN	MAX IN		MASTER CASE	WT LBS
LTMC-38100	3/8"	COIL	.689	.709	.484	.504	16	100'	16
LTMC-50100	1/2"	COIL	.819	.839	.622	.642	26	100'	26
LTMC-501000	1/2"	REEL	.819	.839	.622	.642	26	1000'	260
LTMC-75100	3/4"	COIL	1.032	1.051	.815	.835	31	100'	31
LTMC-751000	3/4"	REEL	1.032	1.051	.815	.835	31	500'	155
LTMC-100100	1"	COIL	1.287	1.315	1.032	1.055	44	100'	44
LTMC-100200	1"	REEL	1.287	1.315	1.032	1.055	44	200'	88
LTMC-12550	1 1/4"	COIL	1.630	1.661	1.370	1.394	70	50'	35
LTMC-125200	1 1/4"	REEL	1.630	1.661	1.370	1.394	70	200'	140
LTMC-15050	1 1/2"	COIL	1.866	1.902	1.579	1.598	80	50'	35
LTMC-150100R	1 1/2"	REEL	1.866	1.902	1.579	1.598	80	100'	80
LTMC-150150R	1 1/2"	REEL	1.866	1.902	1.579	1.598	80	150'	120
LTMC-20025	2"	COIL	2.339	2.374	2.020	2.043	88	25'	22
LTMC-20050	2"	COIL	2.339	2.374	2.020	2.043	88	50'	44
LTMC-200100	2"	REEL	2.339	2.374	2.020	2.043	88	100'	88
LTMC-25025	2 1/2"	COIL	2.839	2.874	2.480	2.504	168	25'	42
LTMC-30025	3"	COIL	3.461	3.500	3.071	3.102	212	25'	53
LTMC-35025	3 1/2"	COIL	3.960	4.000	3.500	3.540	220	25'	55
LTMC-40025	4"	COIL	4.457	4.500	4.000	4.039	228	25'	57

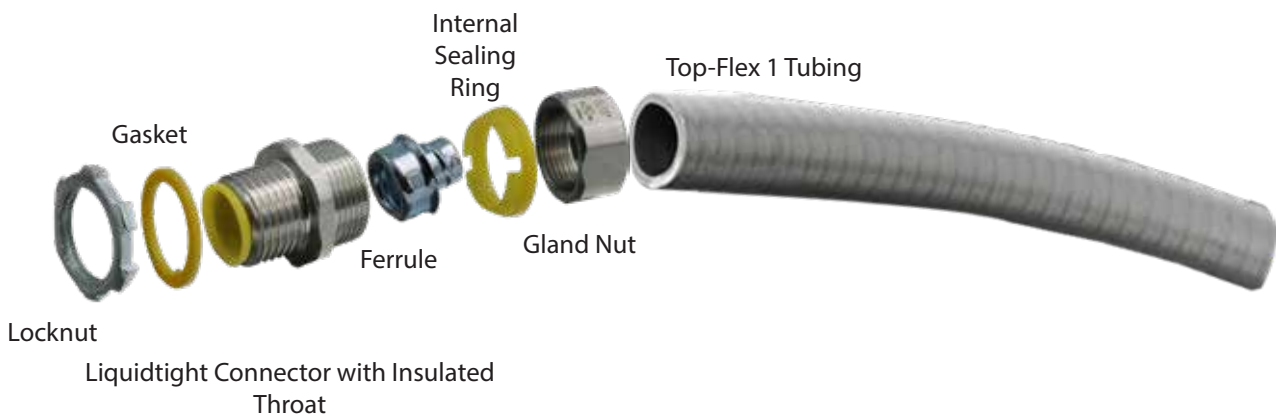

Combination Coupling - EMT/FMC



Features & Benefits:

- Used to connect Flexible Metal Conduit, AC, MC or NM to EMT.
- Set screw type connection for EMT conduit and clamp type connection for FMC.
- For dry use only.
- Zinc Die Cast construction.

Certifications: UL-514B



CAT #	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CARTON	MASTER CASE	CASE LBS
SKFC-38	1/2" - 3/8"	1/2" EMT TO 3/8" FMC	50	500	30
SKFC-50	1/2" - 1/2"	1/2" EMT TO 1/2" FMC	25	250	25
SKFC-75	3/4" - 3/4"	3/4" EMT TO 3/4" FMC		100	13
SKFC-100	1" - 1"	1" EMT TO 1" FMC		50	8

Squeeze Type Combination Couplings



Features & Benefits:


- Used to join EMT to FMC, AC or MC.
- Dry use only
- Zinc Die Cast
- cULus Listed (Size 1/2" to 1")
- cETLus Listed (Size 1 1/4" to 2")

SKSQ-50~SKSQ-100

SKSQ-125~SKSQ-200

Certifications:UL-514B

CAT#	TRADE SIZE IN	DIMENSIONS		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
SKSQ-50	1/2" EMT TO 1/2" FMC	1.67	1.36	6.5	25	250	16.3
SKSQ-75	3/4" EMT TO 3/4" FMC	1.94	1.62	11.2	15	150	16.8
SKSQ-100	1" EMT TO 1" FMC	2.18	1.81	15.7	10	100	15.7
SKSQ-125	1 1/4" EMT TO 1 1/4" FMC	2.54	2.06	24.2	5	50	12.1
SKSQ-150	1 1/2" EMT TO 1 1/2" FMC	2.76	2.56	28.6	5	50	14.3
SKSQ-200	2" EMT TO 2" FMC	3.18	2.94	46.0	2	20	9.2



Compression Type Combination Couplings




Features & Benefits:

- Used to join EMT to FMC
- Dry use only
- Zinc Die Cast

Certifications:UL-514B

CAT#	TRADE SIZE IN	DIMENSIONS		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
CKF-50	1/2" EMT TO 1/2" FMC	1.06	1.59	6.5	50	500	34.7
CKF-75	3/4" EMT TO 3/4" FMC	1.34	1.75	10.0	25	250	25.0
CKF-100	1" EMT TO 1" FMC	1.61	1.97	16.2	25	250	40.4



Top-Bite Saddle Type Strap Compression type Couplings

Features & Benefits:



- The U-shaped clamp securely fastens armored/metal-clad cables or flexible metal conduits and enables installation with just one screw, saving time and labor costs
- Hex Compression nut offers reliable connection for EMT to join onto armored or metal clad cable or flexible metallic conduit
- Strong one piece tubular construction in steel
- Zinc Plated Steel

Certifications:UL-514B



CAT#	TRADE SIZE IN	DESCRIPTION	CABLE SIZE	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
UCSCK-38S	3/8"	Armored Cable, Steel	14/2-10/2	18.6	25	125	23.2
		Armored Cable, Aluminum	14/2-10/2				
		Metal Clad Cable, MCI, Steel	14/2-10/2				
		Metal Clad Cable, MCI, Aluminum	14/2-10/2				
		Metal Clad Cable, MCI-A	14/2-10/3				
		AC HCF, Steel	14/2-10/2				
		AC HCF, Aluminum	14/2-10/2				
		MCI-A HCF	14/2-10/3				
		EMT	1/2"				
		FMC	3/8"				
UCSCK-50S	1/2"	Armored Cable, Steel	12/4-6/3	18.2	25	125	22.7
		Armored Cable, Aluminum	12/4-6/3				
		Metal Clad Cable, MCI, Steel	10/4-8/3				
		Metal Clad Cable, MCI, Aluminum	10/4-8/3				
		Metal Clad Cable, MCI-A	12/4-8/4				
		AC HCF, Steel	12/4-6/3				
		AC HCF, Aluminum	12/4-6/3				
		MCI-A HCF	12/4-8/4				
		EMT	1/2"				
		FMC	1/2"				
UCSCK-75S	3/4"	Armored Cable, Steel	6/4-4/3	23.2	20	100	23.2
		Armored Cable, Aluminum	8/3-4/3				
		Metal Clad Cable, MCI, Steel	8/3-4/3				
		Metal Clad Cable, MCI, Aluminum	6/4, 4/3				
		Metal Clad Cable, MCI-A	8/4, 6/4				
		AC HCF, Steel	6/4-4/3				
		AC HCF, Aluminum	8/3-4/3				
		MCI-A HCF	8/4, 6/4				
		EMT	3/4"				
		FMC	3/4"				

Top-Bite Saddle Type Strap Set Screw Couplings

Features & Benefits:



- The U-shaped clamp securely fastens armored/metal-clad cables or flexible metal conduits and enables installation with just one screw, saving time and labor costs
- Compact screw connection for EMT to join onto armored or metal clad cable or flexible metallic conduit
- Strong one piece tubular construction in steel
- Zinc Plated Steel

Certifications:UL-514B



CAT#	TRADE SIZE IN	DESCRIPTION	CABLE SIZE	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
UCSSK-38S	3/8"	Armored Cable, Steel	14/2-10/2	16.7	50	250	41.7
		Armored Cable, Aluminum	14/2-10/2				
		Metal Clad Cable, MCI, Steel	14/2-10/2				
		Metal Clad Cable, MCI, Aluminum	14/2-10/2				
		Metal Clad Cable, MCI-A	14/2-10/3				
		AC HCF, Steel	14/2-10/2				
		AC HCF, Aluminum	14/2-10/2				
		MCI-A HCF	14/2-10/3				
		EMT	1/2"				
		FMC	3/8"				
UCSSK-50S	1/2"	Armored Cable, Steel	12/4-6/3	15.8	25	125	19.8
		Armored Cable, Aluminum	12/4-6/3				
		Metal Clad Cable, MCI, Steel	10/4-8/3				
		Metal Clad Cable, MCI, Aluminum	10/4-8/3				
		Metal Clad Cable, MCI-A	12/4-8/4				
		AC HCF, Steel	12/4-6/3				
		AC HCF, Aluminum	12/4-6/3				
		MCI-A HCF	12/4-8/4				
		EMT	1/2"				
		FMC	1/2"				
UCSSK-75S	3/4"	Armored Cable, Steel	6/4-4/3	18.7	20	100	18.7
		Armored Cable, Aluminum	8/3-4/3				
		Metal Clad Cable, MCI, Steel	8/3-4/3				
		Metal Clad Cable, MCI, Aluminum	6/4, 4/3				
		Metal Clad Cable, MCI-A	8/4, 6/4				
		AC HCF, Steel	6/4-4/3				
		AC HCF, Aluminum	8/3-4/3				
		MCI-A HCF	8/4, 6/4				
		EMT	3/4"				
		FMC	3/4"				
UCSSK-3875S	3/8"	Armored Cable, Steel	0.43-0.61	10.1	15	150	15.2
		Armored Cable, Aluminum	0.43-0.61				
		Metal Clad Cable, MCI, Steel	0.43-0.61				
		Metal Clad Cable, MCI, Aluminum	0.43-0.61				
		EMT	3/4				
		FMC	3/8				
UCSSK-5075S	1/2"	Armored Cable, Steel	0.63-0.89	11.5	15	150	17.2
		Armored Cable, Aluminum	0.63-0.89				
		Metal Clad Cable, MCI, Steel	0.63-0.89				
		Metal Clad Cable, MCI, Aluminum	0.63-0.89				
		EMT	3/4				
		FMC	1/2				

Combination Couplings




Features & Benefits:

- Used to join threaded rigid conduit or IMC to liquid tight metallic conduit (LFMC).
- Liquid-tight rated
- Steel, Zinc Plated

Certifications:UL-514B

CAT#	TRADE SIZE IN	DIMENSIONS		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
RLT-38S	1/2" RIGID TO 3/8" LFMC	1.10	1.78	16.2	20	200	32.4
RLT-50S	1/2" RIGID TO 1/2" LFMC	1.17	1.78	15.3	20	200	30.6
RLT-75S	3/4" RIGID TO 3/4" LFMC	1.43	1.94	23.6	10	100	23.6
RLT-100S	1" RIGID TO 1" LFMC	1.76	2.19	40.0	5	50	20.0
RLT-125S	1 1/4" RIGID TO 1 1/4" LFMC	2.16	2.23	58.6	5	50	29.3
RLT-150S	1 1/2" RIGID TO 1 1/2" LFMC	2.38	2.62	70.0		12	8.4
RLT-200S	2" RIGID TO 2" LFMC	2.87	2.67	106.0		5	5.3

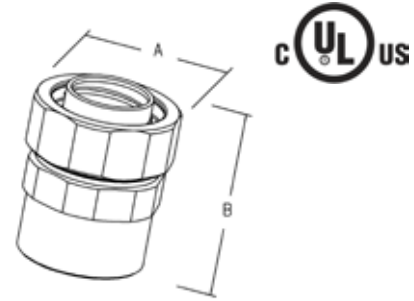

Set Screw type Combination Coupling



SER-50S、SER-75S


SER-100S

Features & Benefits:

- Used to join EMT to unthreaded rigid conduit or IMC.
- Concrete-tight when taped.
- Steel, Zinc Plated

Certifications:UL-514B

CAT#	TRADE SIZE IN	DIMENSIONS			WT /100pcs LBS	PACKAGE INFORMATION		
		A	B	C		INNER CASE	MASTER CASE	WT LBS
SER-50S	1/2" EMT TO 1/2" RIGID	0.85	2.32	0.99	13.6	25	250	34.1
SER-75S	3/4" EMT TO 3/4" RIGID	1.06	2.72	1.20	19.8	10	100	19.8
SER-100S	1" EMT TO 1" RIGID	1.32	3.15	1.48	31.9	10	100	31.9

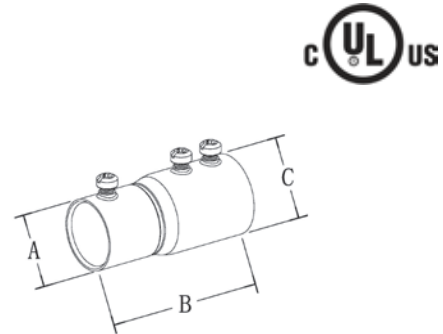

Compression type Combination Couplings

Features & Benefits:

- Used to join EMT to threaded rigid conduit or IMC.
- Rain-tight rated.
- Steel, Zinc Plated



Certifications:UL-514B

CAT#	TRADE SIZE IN	DIMENSIONS		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
CER-50RTS	1/2" EMT TO 1/2" RIGID	1.10	1.57	16.3	20	200	32.6
CER-75RTS	3/4" EMT TO 3/4" RIGID	1.33	1.62	21.8	10	100	21.8
CER-100RTS	1" EMT TO 1" RIGID	1.63	1.82	35.5	10	100	35.5
CER-125RTS	1 1/4" EMT TO 1 1/4" RIGID	2.03	2.16	56.4	5	50	28.2
CER-150RTS	1 1/2" EMT TO 1 1/2" RIGID	2.28	2.24	66.6		12	8.0
CER-200RTS	2" EMT TO 2" RIGID	2.75	2.34	90.4		5	4.5



Combination Couplings

Features & Benefits:

- Used to join EMT to liquid tight metallic conduit(LFMC).
- Rain-tight rated.
- Steel, Zinc Plated



Certifications:UL-514B

CAT#	TRADE SIZE IN	DIMENSIONS		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
EMTLT-50S	1/2" EMT TO 1/2" LFMC	1.10	1.85	16.3	25	250	40.8
EMTLT-75S	3/4" EMT TO 3/4" LFMC	1.43	1.94	22.8	20	200	45.6
EMTLT-100S	1" EMT TO 1" LFMC	1.76	2.17	38.6	10	100	38.6
EMTLT-125S	1 1/4" EMT TO 1 1/4" LFMC	2.16	2.65	65.2	5	25	16.3
EMTLT-150S	1 1/2" EMT TO 1 1/2" LFMC	2.38	2.81	79.2	5	25	19.8
EMTLT-200S	2" EMT TO 2" LFMC	2.87	2.91	109.2	5	25	27.3




Conduit Support

Pipe Hangers

Features & Benefits:

- Used to secure and suspend EMT, rigid, IMC and PVC conduits from overhead supports.
- Steel, Zinc Plated, with a carriage bolt and a nut

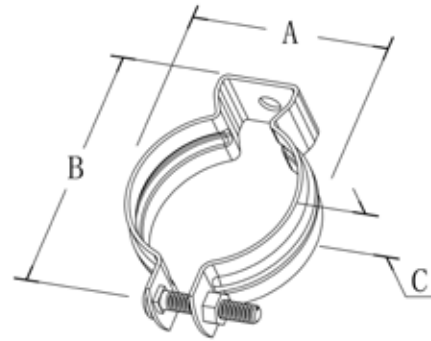

Certifications: UL-2239

CAT#	EMT SIZE	RIGID SIZE	BOLT SIZE	A LENGTH	B WIDTH	C LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
PH-50CB	1/2"	3/8 or 1/2"	1/4-20 x 1"	0.93	2.02	0.73	5.40		100	5.40
PH-75CB	3/4"	3/4"	1/4-20 x 1"	1.14	2.26	0.73	7.20		100	7.20
PH-100CB	1"	1"	1/4-20 x 1"	1.50	2.56	0.87	7.20		100	7.20
PH-105CB	1 1/4"		1/4-20 x 1 1/4"	1.70	2.79	0.87	9.00		100	9.00
PH-125CB	1 1/2"	1 1/4"	1/4-20 x 1 1/4"	1.93	3.01	0.87	9.00		100	9.00
PH-150CB		1 1/2"	1/4-20 x 1 1/4"	2.14	3.32	1.00	16.20		100	16.20
PH-200CB	2"	2"	1/4-20 x 2"	2.61	3.76	1.00	18.00		50	9.00
PH-250CB	2 1/2"	2 1/2"	1/4-20 x 2"	3.14	4.44	1.21	19.80		50	9.90
PH-300CB	3"	3"	1/4-20 x 2"	3.77	5.08	1.20	21.60		25	5.40
PH-350CB	3 1/2"	3 1/2"	1/4-20 x 2"	4.30	5.59	1.20	28.80		25	7.20
PH-400CB	4"	4"	1/4-20 x 2"	4.80	6.07	1.20	43.20		25	10.80

Pipe Hanger



Pipe Hanger

Conduit Support

Universal Conduit Clamps




Features & Benefits:

- Universal Conduit Clamps are used to secure EMT, IMC and Rigid conduit.
- Zinc Plated Steel
- Captive Screw Zinc Plated Steel



Certifications: UL-2239

CAT#	RIGID/IMC SIZE	EMT SIZE	A Width	B LENGTH	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	WT LBS
PS-50NS	1/2"	1/2"	1.24	2.23	10.14		100	10.14
PS-75NS	3/4"	3/4"	1.24	2.42	11.02		100	11.02
PS-100NS	1"	1"	1.24	2.77	13.67		100	13.67
PS-125NS	1 1/4"	1 1/4"	1.24	3.09	13.89		100	13.89
PS-150NS	1 1/2"	1 1/2"	1.24	3.38	16.09		100	16.20
PS-200NS	2"	2"	1.24	3.77	17.42		50	8.71
PS-250NS	2 1/2"	2 1/2"	1.24	4.47	26.46		50	13.23
PS-300NS	3"	3"	1.24	5.08	29.76		25	7.44
PS-350NS	3 1/2"	3 1/2"	1.24	5.74	33.51		25	8.38
PS-400NS	4"	4"	1.24	6.30	36.60		25	9.15

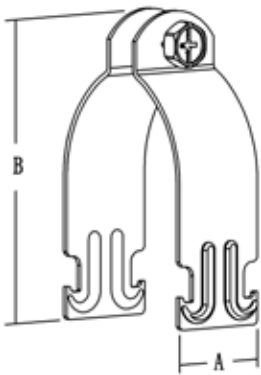

Universal Conduit Clamp



Universal Conduit Clamp



Right Angle Clamps




Features & Benefits:

- Right Angle Type – to attach the conduit run at a 90° angle to a beam or structural member.
- Malleable Iron, hot dip galvanized.

Certifications: UL-2239

CAT#	TRADE SIZE IN	DIMENSIONS(IN)			WT /100pcs LBS	PACKAGE INFORMATION		
		A	B	C		INNER CASE	MASTER CASE	WT LBS
KRA-50M-HDG	1/2"	0.97	1.24	2.46	29.0		50	14.5
KRA-75M-HDG	3/4"	1.15	1.43	2.76	33.8		50	16.9
KRA-100M-HDG	1"	1.42	1.70	3.01	39.6		50	19.8
KRA-125M-HDG	1 1/4"	1.79	2.07	3.16	43.6		50	21.8
KRA-150M-HDG	1 1/2"	2.04	2.32	3.52	51.8		50	25.9
KRA-200M-HDG	2"	2.49	2.83	4.39	68.6		50	34.3
KRA-250M-HDG	2 1/2"	3.06	3.39	4.75	88.4		25	22.1
KRA-300M-HDG	3"	3.65	3.98	5.38	103.6		25	25.9
KRA-350M-HDG	3 1/2"	4.21	4.55	5.76	113.2		25	28.3
KRA-400M-HDG	4"	4.69	5.03	6.27	123.6		25	30.9

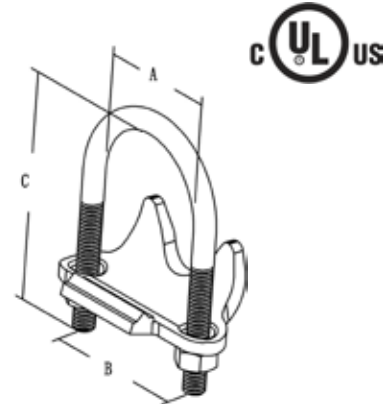

Parallel Clamps




Features & Benefits:

- Parallel Type – to attach the conduit run parallel to a beam or structural member.
- Malleable Iron, hot dip galvanized.

Certifications: UL-2239

CAT#	TRADE SIZE IN	DIMENSIONS(IN)		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
PCS-50M-HDG	1/2"	2.80	1.42	55.4		50	27.7
PCS-75M-HDG	3/4"	2.99	1.47	54.8		50	27.4
PCS-100M-HDG	1"	3.19	1.54	62.0		50	31.0
PCS-125M-HDG	1 1/4"	3.39	2.01	76.0		25	19.0
PCS-150M-HDG	1 1/2"	3.62	2.01	83.6		25	20.9
PCS-200M-HDG	2"	4.37	2.87	107.6		25	26.9
PCS-250M-HDG	2 1/2"	5.12	3.23	149.0		10	14.9
PCS-300M-HDG	3"	5.79	4.06	173.0		10	17.3
PCS-350M-HDG	3 1/2"	6.26	4.53	190.0		10	19.0
PCS-400M-HDG	4"	6.46	4.61	216.0		10	21.6

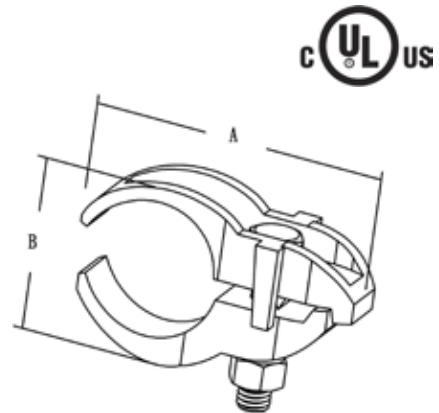

Edge Type Clamps




Features & Benefits:

- Edge Type – to attach the conduit run at a 90° angle to a thin beam or structural member.
- Malleable Iron, hot dip galvanized.

Certifications: UL-2239

CAT#	TRADE SIZE IN	DIMENSIONS(IN)		WT /100pcs LBS	PACKAGE INFORMATION		
		A	B		INNER CASE	MASTER CASE	WT LBS
EDG-50M-HDG	1/2"	2.10	2.72	62.0	50	31.0	
EDG-75M-HDG	3/4"	2.44	3.01	71.4	50	35.7	
EDG-100M-HDG	1"	2.57	3.23	74.2	50	37.1	
EDG-125M-HDG	1 1/4"	2.96	3.47	85.6	25	21.4	
EDG-150M-HDG	1 1/2"	3.27	3.65	99.2	25	24.8	
EDG-200M-HDG	2"	3.85	4.36	137.6	25	34.4	
EDG-250M-HDG	2 1/2"	4.40	5.05	201.0	10	20.1	
EDG-300M-HDG	3"	5.08	5.41	238.0	10	23.8	

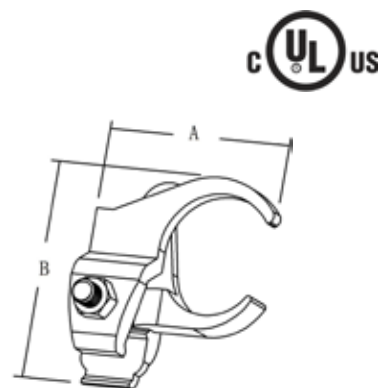

U Bolts - Heavy Duty




Features & Benefits:

- U Bolts - support heavy pipe, tube, and conduit from ceilings, walls, and poles.
- Steel, Mechanical galvanized.

Certifications: UL-2239

CAT#	TRADE SIZE IN	DIMENSIONS(IN)			WT /100pcs LBS	PACKAGE INFORMATION		
		A	B	C		INNER CASE	MASTER CASE	WT LBS
UB-50S-HDG	1/2"	0.97	1.24	2.46	11.7	25	250	29.3
UB-75S-HDG	3/4"	1.15	1.43	2.76	13.4	25	250	33.6
UB-100S-HDG	1"	1.42	1.70	3.01	14.3	25	250	35.8
UB-125S-HDG	1 1/4"	1.79	2.07	3.16	15.1	20	200	30.1
UB-150S-HDG	1 1/2"	2.04	2.32	3.52	16.7	20	200	33.3
UB-200S-HDG	2"	2.49	2.83	4.39	29.6	10	100	29.6
UB-250S-HDG	2 1/2"	3.06	3.39	4.75	33.0	20	6.6	
UB-300S-HDG	3"	3.65	3.98	5.38	36.5	20	7.3	
UB-350S-HDG	3 1/2"	4.21	4.55	5.76	38.5	20	7.7	
UB-400S-HDG	4"	4.69	5.03	6.27	43.0	20	8.6	

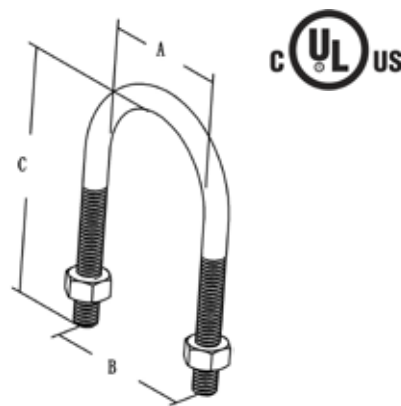

Hanging & Support

Beam Clamps




Certifications: UL-2239

CAT#	JAW OPENING IN	TAP SIZE IN	A LENGTH IN	B WIDTH IN	C HEIGHT IN	WT /100pcs LBS	PACKAGE INFORMATION INNER CASE	MASTER CASE	WT LBS
BC-100M	3/4"	1/4" - 20	1.11	1.38	1.28	22		50	11
BC-200M	7/8"	3/8" - 16	1.98	1.89	1.75	46		50	23
BC-250M	1-1/8"	1/2" - 13	2.48	2.52	2.17	115		50	7

Features & Benefits:

- Case hardened steel bolt
- Tapped threads back and bottom
- High-strength malleable iron
- Malleable Iron Beam Clamps are used for the attachment of conduit hangers-either directly or by means of threaded rod.

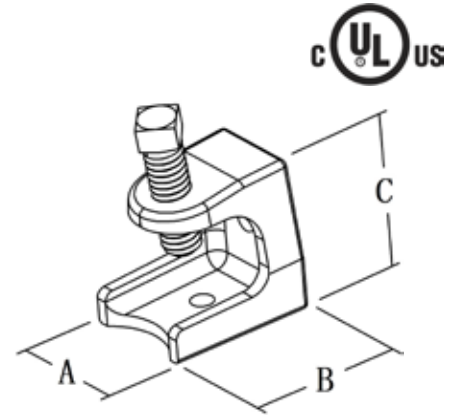

Grounding Clamps




Certifications: UL-467

CAT#	TRADE SIZE IN	WIRE RANGE AWG	A LENGTH IN	B DEPTH IN	C WIDTH IN	WT /100pcs LBS	PACKAGE INFORMATION INNER CASE	MASTER CASE	WT LBS
GC-50/100	1/2" - 1"	2-8	2.25	1.37	1.00	80.0		250	200

Features & Benefits:

- GC-50/100 is used to connect 2 to 8 AWG bare or armored copper grounding wire to 1/2, 3/4 or 1 in pipe or 3/4, 1 in ground rod, or 1/2 in and 3/4 in copper water pipe.
- Body: Zinc Die Cast
- Screw: Steel

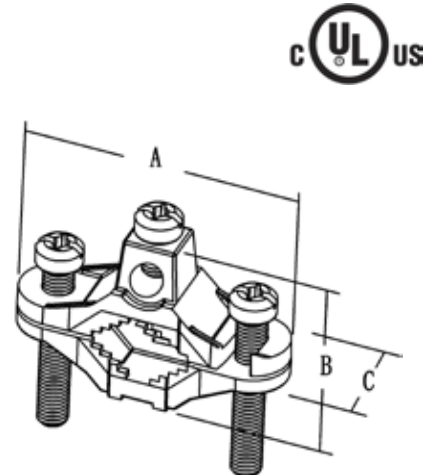

Knockout Seals


Snap-In Seals




Features & Benefits:

- Installs into unused box knockout
- Steel/Zinc Plated
- Suitable for airtight and dust tight application.

CAT#	TRADE SIZE	A Width	B LENGTH	WT /100pcs LBS	PACKAGE INFORMATION		
	IN	IN	IN		INNER CASE	MASTER CASE	WT LBS
KS-50S	1/2"	1.08	0.29	1.1	100	1000	10.9
KS-75S	3/4"	1.23	0.31	1.3	100	1000	12.6
KS-100S	1"	1.47	0.34	1.7	50	500	8.7
KS-125S	1 1/4"	1.88	0.37	2.7	50	500	13.6
KS-150S	1 1/2"	2.22	0.31	3.3	50	500	16.7
KS-200S	2"	2.67	0.34	3.5	50	500	17.3

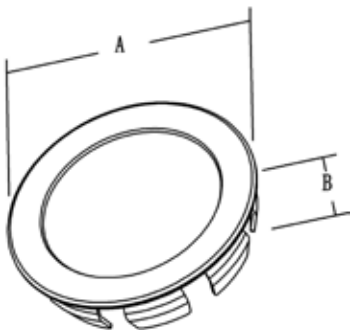

Switch Box Support Brackets

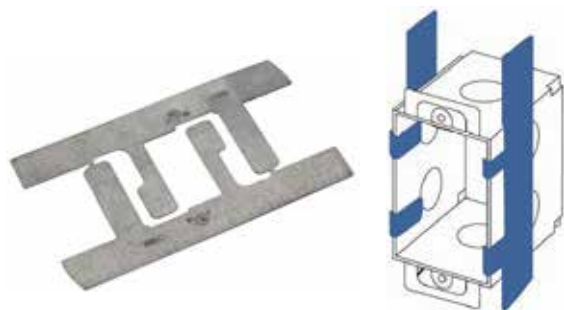

Features & Benefits:

- Used to secure a switch box in a hollow wall cavity of plaster or drywall.
- Galvanized steel construction.



CAT #	DESCRIPTION	PACKAGE INFORMATION		
		INNER CASE	MASTER CASE	WT LBS
SBS	F-BRACKET, BOX SUPPORT	50	500	24

Gangable Switch Boxes

3 X 2" Gangable Switch Boxes - 1 1/2" & 2" Deep



Features & Benefits:

- Gangable for multiple switch or device installation.
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
SBG410-50	3 X 2" SW BX 1 1/2" DP, NM CLAMP & ADJ PLASTER EAR	ENDS: (4) PRY OUTS BOTTOM: (1) 1/2"	7.5	50	28
SBG420-50	3 X 2" SW BX 2" DEEP, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" BOTTOM: (2) 1/2"	10.0	50	28
SBG440-50	3 X 2" SW BX 2" DEEP, MC CLAMP 1/2" KO	ENDS: (4) PRY OUTS BOTTOM: (1) 1/2"	10.0	50	28
SBG445-50	3 X 2" SW BX 2" DEEP, NM CLAMP 1/2" KO	ENDS: (4) PRY OUTS BOTTOM: (1) 1/2"	10.0	50	28

3 X 2" Gangable Switch Boxes - 2 1/2" Deep



Features & Benefits:

- Gangable for multiple switch or device installation.
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
SBG500-50	3 X 2" SW BX 2 1/2" DEEP, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" BOTTOM: (2) 1/2"	12.5	50	29
SBG503-50	3 X 2" SW BX 2 1/2" DEEP, CONCENTRIC KO	SIDES: (2) 1/2" ENDS: (2) CON 1/2" & 3/4" BOTTOM: (2) 1/2"	12.5	50	29
SBG518-50	3 X 2" SW BX 2 1/2" DEEP, MC CLAMP 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	12.5	50	32
SBG519-50	3 X 2" SW BX 2 1/2" DEEP, NM CLAMP 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	12.5	50	32
SBG523-50	3 X 2" SW BX 2 1/2" DEEP, MC CLAMPS for OLD WORK, 1/2" KO	ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	12.5	50	30
SBG524-50	3 X 2" SW BX 2 1/2" DEEP, MC CLAMP, FL BRKT, 1/2" KO	SIDES: (2) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	12.5	50	31

Gangable Switch Boxes

3 X 2" Gangable Switch Boxes - 2 3/4" Deep



Features & Benefits:

- Gangable for multiple switch or device installation.
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
SBG565-50	3 X 2" SW BX 2 3/4" DEEP, 1/2" & 3/4" KO	SIDES: (4) 3/4" ENDS: (2) 3/4" BOTTOM: (2) 1/2"	14.0	50	31
SBG567-50	3 X 2" SW BX 2 3/4" DEEP, NM CLAMP, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUTS	14.0	50	31
SBG570-50	3 X 2" SW BX 2 3/4" DEEP, MC CLAMP, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	14.0	50	31
SBG574-50	3 X 2" SW BX 2 3/4" DEEP, NM CLAMP, FL BKT, 1/2" KO	SIDES: (2) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	14.0	50	33

3 X 2" Gangable Switch Boxes - 3 1/2" Deep



Features & Benefits:

- Gangable for multiple switch or device installation.
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
SBG591-25	3 X 2" SW BX 3 1/2" DEEP, CONCENTRIC KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (2) 1/2" & 3/4" CON BOTTOM: (2) 1/2"	18.0	25	19
SBG600-25	3 X 2" SW BX 3 1/2" DEEP, MC CLAMP, #12AWG SOLID PIGTAIL, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUTS	18.0	25	21
SBG601-25	3 X 2" SW BX 3 1/2" DEEP, NM CLAMP, #12AWG SOLID PIGTAIL, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	18.0	25	21
SBG604-25	3 X 2" SW BX 3 1/2" DEEP, MC CLAMP, #12AWG SOLID PIGTAIL, FL BRKT, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	18.0	25	22
SBG605-25	3 X 2" SW BX 3 1/2" DEEP, NM CLAMP, #12AWG SOLID PIGTAIL, FL BRKT, 1/2" KO	SIDES: (4) 1/2" ENDS: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	18.0	25	22

Multi-Gang Switch Boxes

1 5/8" Deep



Features & Benefits:

- Multi-Gang Boxes are used to install multiple devices in one location.
- May be used as large capacity junction boxes..
- Galvanized steel, welded construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
MSB13	3 GANG MULTI-GANG WELDED SWITCH BOX 1-5/8" DEEP	SIDES: (14) 1/2" & 3/4" CONCENTRIC BOTTOM: (12) 1/2" & 3/4" CONCENTRIC	58.5	25	8
MSB14	4 GANG MULTI-GANG WELDED SWITCH BOX 1-5/8" DEEP	SIDES: (16) 1/2" & 3/4" CONCENTRIC BOTTOM: (6) 1/2" & (4) 3/4"	71	20	6.2
MSB15	5 GANG MULTI-GANG WELDED SWITCH BOX 1-5/8" DEEP	SIDES: (18) 1/2" & 3/4" CONCENTRIC BOTTOM: (6) 1/2" & (4) 3/4"	81	20	10

2 1/2" Deep



Features & Benefits:

- Multi-Gang Boxes are used to install multiple devices in one location.
- May be used as large capacity junction boxes..
- Galvanized steel, welded construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
MSB33	3 GANG MULTI-GANG WELDED SWITCH BOX 2 1/2" DEEP	SIDES: (14) 1/2" & 3/4" CONCENTRIC BOTTOM: (12) 1/2" & 3/4" CONCENTRIC	90.5	10	17.5
MSB34	4 GANG MULTI-GANG WELDED SWITCH BOX 2 1/2" DEEP	SIDES: (16) 1/2" & 3/4" CONCENTRIC BOTTOM: (6) 1/2" & (4) 3/4"	111.8	10	3.1
MSB35	5 GANG MULTI-GANG WELDED SWITCH BOX 2 1/2" DEEP	SIDES: (18) 1/2" & 3/4" CONCENTRIC BOTTOM: (6) 1/2" & (4) 3/4"	128.5	5	0.3

Handy Boxes

4 X 2" Drawn Handy Boxes - 1 1/2" Deep



Features & Benefits:

- Handy boxes are used for convenience outlets, switches and small junction boxes in exposed work applications.
- Raised Ground Screw



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
H4470-50	4 X 2" RECEPTACLE BX 1 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (4) 1/2" & (2) 3/4" ENDS: ((2) CON 1/2" & 3/4" BOTTOM: (1) 3/4"	11.5	50	27
H4471-50	4 X 2" RECEPTACLE BX 1 1/2" DEEP, 1/2" KO	SIDES: (6) 1/2" ENDS: (2) 1/2" BOTTOM: (2) 1/2"	11.5	50	27

4 X 2" Drawn Handy Boxes (1 7/8" Deep)



Features & Benefits:

- Handy boxes are used for convenience outlets, switches and small junction boxes in exposed work applications.
- Raised Ground Screw



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
H4450-50	4 X 2" RECEPTACLE BX 1 7/8" DEEP, 1/2" KO	SIDES: (6) 1/2" ENDS: ((2) CON 1/2" & 3/4" BOTTOM: (2) 3/4"	13.5	50	24
H4451-50	4 X 2" RECEPTACLE BX 1 7/8" DEEP, 1/2" KO	SIDES: (6) 1/2" ENDS: (2) 1/2" BOTTOM: (3) 1/2"	13.5	50	24
H4452-50	4 X 2" RECEPTACLE BX 1 7/8" DEEP, 1/2" & 3/4" KO	SIDES: (4) 1/2" & (2) 3/4" ENDS: (2) 3/4" BOTTOM: (2) 1/2" & (1) 3/4"	13.5	50	24
H4453-50	4 X 2" RECEPTACLE BX 1 7/8" DEEP, 3/4" KO	SIDES: (4) 3/4" ENDS: (2) 3/4" BOTTOM: (1) 3/4"	13.5	50	24
H4454-50	4 X 2" RECEPTACLE BX 1 7/8" DEEP, 3/4" KO	SIDES: (4) 3/4" ENDS: (2) 3/4" BOTTOM: (2) 3/4"	13.5	50	24
H4456-50	4 X 2" RECEPTACLE BX 1 7/8" DEEP, 3/4" KO	SIDES: (4) CONN 1/2" & 3/4" ENDS: (2) CONN 1/2" & 3/4" BOTTOM: (2) 3/4"	13.5	50	24

Handy Boxes

4 X 2" Drawn Handy Boxes (2 1/8" Deep)



Features & Benefits:

- Handy boxes are used for convenience outlets, switches and small junction boxes in exposed work applications.
- Raised Ground Screw



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
H4467-50	4 X 2" RECEPTACLE BX 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (4) 1/2" & (2) 3/4" ENDS: ((2) 1/2"	11.5	50	29
H4468-50	4 X 2" RECEPTACLE BX 2 1/8" DEEP, 1/2" KO	BOTTOM: (1) 1/2" & (1) 3/4" SIDES: (6) 1/2" ENDS: (2) 1/2" BOTTOM: (2) 1/2"	11.5	50	29

4 X 2" Drawn Handy Box Extension & Covers



Features & Benefits:

- Captive screws
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
H4457-50	4 X 2" RECEPTACLE BX EXT 1 1/2" DEEP, 1/2" & 3/4" KO ENDS: ((2) 3/4"	SIDES: (4) 1/2" & (2) 3/4" BOTTOM: OPEN	11.5	50	24
C1152-100	4" X 2" RECEPTACLE COVER, BLANK		1.5	100	11
C1153-100	4" X 2" RECEPTACLE COVER, TOGGLE SWITCH		1.5	100	11
C1156-100	4" X 2" RECEPTACLE COVER, 1/2" KO	TOP: (1) 1/2"	1.5	100	11

Octagon Boxes & Covers

4" Drawn Octagon Boxes



Features & Benefits:

- Octagon boxes are used to install ceiling and wall lighting fixtures, fans, or convenience outlets and devices.
- Raised Ground Screw
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
G2450-50	4" OCT BX 1 1/2" DEEP, NM CLAMP, 1/2" KO	SIDES: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	15.8	50	27
G2451-50	4" OCT BX 1 1/2" DEEP, MC CLAMP, 1/2" KO	SIDES: (2) 1/2" & (4) PRY OUT BOTTOM: (1) 1/2"	15.8	50	27
G2453-50	4" OCT BX 1 1/2" DEEP, NM CLAMP, 1/2" KO with EARS	SIDES: (4) 1/2" BOTTOM: (1) 1/2"	15.8	50	25
G4451-50	4" OCT BX 1 1/2" DEEP, 1/2" KO	SIDES: (4) 1/2" BOTTOM: (4) 1/2"	15.8	50	25
G4452-50	4" OCT BX 1 1/2" DEEP, 1/2 & 3/4" KO	SIDES: (4) 3/4" BOTTOM: (2) 1/2" & (2) 3/4"	15.8	50	25
G4453-50	4" OCT BX 1 1/2" DEEP, 1/2 & 3/4" KO	SIDES: (2) 1/2" & (2) 3/4" BOTTOM: (5) 1/2"	15.8	50	25
G4454-50	4" OCT BX 1 1/2" DEEP, 1/2 & 3/4" KO	SIDES: (2) 1/2" & (2) 3/4" BOTTOM: (2) 1/2" & (2) 3/4"	15.8	50	25
G4455-50	4" OCT BX 1 1/2" DEEP, 1/2 & CON 1/2" & 3/4" KO	SIDES: (4) CONN 1/2" & 3/4" BOTTOM: (2) 1/2" & (2) CON 1/2" & 3/4"	15.8	50	25

4" Drawn Octagon Boxes with Brackets & Supports



Features & Benefits:

- Octagon boxes are used to install ceiling and wall lighting fixtures, fans, or convenience outlets and devices.
- Raised Ground Screw
- Galvanized steel construction.



Certifications: UL-514A

CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
G3450-25	4" OCT BX 1 1/2" DEEP, w/FL BKT, 1/2" & 3/4" KO	SIDES: (2) 1/2" & (2) CONN 1/2" & 3/4" BOTTOM: (3) 1/2" & (2) 3/4"	15.8	25	15
G3451-25	4" OCT BX 1 1/2" DEEP, MC CLAMP, ADJ BAR, 1/2" KO	SIDES: (2) 1/2" & (4) PRY OUT	15.8	25	25
G3452-25	4" OCT BX 1 1/2" DEEP, NM CLAMP, ADJ BAR, 1/2" KO	SIDES: (2) 1/2" & (4) PRY OUT	15.8	25	25
G3454-25	4" OCT BX 1 1/2" DEEP, NM CLAMP, J-WOOD BKT, 1/2" KO	SIDES: (4) 1/2" BOTTOM: (4) 1/2"	15.8	25	18
G3455-25	4" OCT BX 1 1/2" DEEP, MC CLAMP, w/FL BKT, 1/2 KO	SIDES: (2) 1/2" & (2) CON 1/2" & 3/4" BOTTOM: (3) 1/2" & (2) 3/4"	15.8	25	16

Octagon Boxes & Covers

4" Drawn Octagon Deep Boxes



Features & Benefits:

- Octagon boxes are used to install ceiling and wall lighting fixtures, fans, or convenience outlets and devices.
- Raised Ground Screw
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
G4456-25	4" OCT BX 2 1/8" DEEP, 1/2" KO	SIDES: (4) 1/2" BOTTOM: (4) 1/2"	22.8	50	31
G4457-25	4" OCT BX 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (2) 1/2" & (2) 3/4" BOTTOM: (4) 1/2"	22.8	50	31
G4458-25	4" OCT BX 2 1/4" DEEP, CON 1/2" & 3/4" KO	SIDES: (4) CON 1/2" & 3/4" BOTTOM: (5) 1/2"	22.8	50	31

4" Octagon Box Covers



Features & Benefits:

- Keyhole mounting holes for easy installation
- Used to close off 4" octagon box as a junction box.
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
C8451-50	4" OCT BX BLANK COVER			50	11
C8452-50	4" OCT BX COVER, 1/2" KO	TOP: (1) 1/2"		50	11
RC400	CONCRETE RING COVER, BLANK			50	15
RC401	CONCRETE RING COVER, 1/2" & 3/4" KO	TOP: (3) 1/2" & (2) 3/4"		50	15

Octagon Boxes & Covers

Round Pancake Boxes & Covers



Features & Benefits:

- For use as shallow junction box to support fixtures of 50 lbs or less.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
P3452-50	3 1/2" ROUND PANCAKE BX , NM CLAMP, 1/2" DEEP, 1/2" KO	BOTTOM: (1) 1/2"	3.9	50	15
P4451-50	4" ROUND PANCAKE BX , 5/8" DEEP, 1/2" KO	BOTTOM: (4) 1/2"	3.9	50	18
RC141-50	4" ROUND STEEL FLAT COVER, 1/2" KO	TOP: (1) 1/2"		100	20
RC142-50	4" ROUND STEEL FLAT COVER, BLANK			100	20

4" Swivel Type Covers



Features & Benefits:

- 20° swing from vertical
- SCR Fits standard Octagon boxes.
- Used to hang commercial lighting fixtures.
- SCS fits 4" square boxes.
- Used where pipe stems or fixtures may be subject to motion or vibration.
- Galvanized Steel Construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
SCR-50/75	4" ROUND OCTAGON BOX SWIVEL COVER			25	17
SCS-50/75	4" SQUARE OCTAGON BOX SWIVEL COVER			25	15

Square Boxes & Covers

4 11/16" Square Welded Boxes



Features & Benefits:

- 4 11/16" square boxes are used where multiple conductor runs are split into two or more direction to bring power to a number of devices.
- Combination knockouts allow for greater wiring flexibility.
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
B7451-25	4 11/16" SQ WELDED BX EXT, 1 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (4) CON 1/2" & 3/4"	31	20	25
B7452-25	4 11/16" SQ WELDED BX EXT, 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & (4) 3/4"	44	20	25
B8451-20	4 11/16" SQ WELDED BX, 2 1/8" DEEP, CON 1/2" & 3/4" KO	SIDES: (4) 1/2" (6) CON 1/2" & 3/4" BOTTOM: (2) 1/2" & (2) CON 1/2" & 3/4"	44	20	29
B8453-25	4 11/16" SQ WELDED BX, 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & (4) 3/4" BOTTOM: (2) 1/2" & (2) 3/4"	44	20	29
B8454-25	4 11/16" SQ WELDED BX, 2 1/8" DEEP, 3/4" & 1" KO	SIDES: (4) 3/4" & (4) 1" BOTTOM: (2) 1/2" & (2) 3/4"	44	20	29
B8456-25	4 11/16" SQ WELDED BX, 2 1/8" DEEP, 1" KO	SIDES: (8) 1" BOTTOM: (2) 1/2" & (2) 3/4"	44	20	29

4 11/16" Box Covers



Features & Benefits:

- 4 11/16" Box Covers are used to enclose a 4 11/16" square electrical box
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
C7510-50	4 11/16" FLAT SQUARE BX COVER, 1/2" KO	TOP: (1) 1/2"		50	20
C7511-50	4 11/16" FLAT SQUARE BX COVER, BLANK			50	20
C7513-50	4 11/16" FLAT SQUARE BX COVER, BLANK			50	20

Square Boxes & Covers

4" Square Drawn Boxes



Features & Benefits:

- 4" square boxes are used where multiple conductor runs are split into two or more direction to bring power to a number of devices.
- Combination knockouts allow for greater wiring flexibility.
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
B4450-50	4" SQ DRAWN BOX, 1 1/2" DEEP, 1/2" KO	SIDES: (12) 1/2" BOTTOM: (4) 1/2"	21	50	28
B4451-50	4" SQ DRAWN BOX, 1 1/2" DEEP, 1/2" KO	SIDES: (12) 1/2" BOTTOM: (5) 1/2"	21	50	29
B4452-50	4" SQ DRAWN BOX, 1 1/2" DEEP, 3/4" KO	SIDES: (8) 3/4" BOTTOM: (3) 1/2" & (2) 3/4"	21	50	29
B4453-50	4" SQ DRAWN BOX, 1 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & (4) 3/4" BOTTOM: (3) 1/2" & (2) 3/4"	21	50	29
B4454-50	4" SQ DRAWN BOX, 1 1/2" DEEP, CON 1/2" & 3/4" KO	SIDES: (8) CON 1/2" & 3/4" BOTTOM: (2) 1/2" & (2) 3/4"	21	50	29

4" Square Drawn Deep Boxes



Features & Benefits:

- 4" square boxes are used where multiple conductor runs are split into two or more direction to bring power to a number of devices.
- Combination knockouts allow for greater wiring flexibility.
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
D4451-25	4" SQ DRAWN BOX, 2 1/8" DEEP, 1/2" KO	SIDES: (12) 1/2" BOTTOM: (5) 1/2"	29	50	20
D4452-25	4" SQ DRAWN BOX, 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & (4) 3/4" BOTTOM: (52) 1/2" & (2) 3/4"	29	50	20
D4454-25	4" SQ DRAWN BOX, 2 1/8" DEEP, 3/4" KO	SIDES: (8) 3/4" BOTTOM: (3) 1/2" & (2) 3/4"	29	50	20
D4455-25	4" SQ DRAWN BOX, 2 1/8" DEEP, 1" KO	SIDES: (8) 1" BOTTOM: (3) 1/2" & (2) 3/4"	29	50	20
D4456-25	4" SQ DRAWN BOX, 2 1/8" DEEP, 3/4" & 1" KO	SIDES: (4) 3/4" & (4) 1" BOTTOM: (2) 1/2" & (2) 3/4"	29	50	20

Square Boxes & Covers

4" Square Welded Boxes



Features & Benefits:

- 4" square boxes are used where multiple conductor runs are split into two or more direction to bring power to a number of devices.
- Combination knockouts allow for greater wiring flexibility.
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
B8544-25	4" SQ WELDED BOX, 1 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (6) 1/2" & (3) CON 1/2" & 3/4" BOTTOM: (3) 1/2" & (2) CON 1/2" & 3/4"	22	25	20
B8545-25	4" SQ WELDED BOX, 1 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & (4) CON 1/2" & 3/4" BOTTOM: (5) 1/2"	22	50	15
B8548-25	4" SQ WELDED BOX, 1 1/2" DEEP, MC CLAMP, S-BRKT, 1/2" & 3/4" KO	SIDES: (3) 3/4" & (1) CON 1/2" & 3/4" BOTTOM: (1) 1/2"	22	50	22
B8549-25	4" SQ WELDED BOX, 1 1/2" DEEP, MC CLAMP, FL-BRKT, 1/2" & 3/4" KO	SIDES: (3) 1/2" & (1) CON 1/2" & 3/4" BOTTOM: (1) 1/2"	22	50	21

4" Square Welded Deep Boxes



Features & Benefits:

- 4" square boxes are used where multiple conductor runs are split into two or more direction to bring power to a number of devices.
- Combination knockouts allow for greater wiring flexibility.
- Galvanized steel construction



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
B8452-50	4" SQ WELDED BOX, 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (4) 1/2" & (6) CON 1/2" & 3/4" BOTTOM: (3) 1/2" & (2) CON 1/2" & 3/4"	31.5	50	29
B8546-25	4" SQ WELDED BOX, 2 1/8" DEEP, 1/2" & 3/4" KO	SIDES: (4) 1/2" & (2) CON 1/2" & 3/4" BOTTOM: (3) 1/2" & (2) CON 1/2" & 3/4"	31.5	25	20
D6500-25	4" SQ WELDED BOX, 2 1/8" DEEP, FL-BRKT, 1/2" & 3/4" KO	SIDES: (6) 1/2" & (3) CON 1/2" & 3/4" BOTTOM: (3) 1/2" & (2) CON 1/2" & 3/4"	31.5	50	28
D6541-25	4" SQ WELDED BOX, 2 1/8" DEEP, MC CLAMP, FL-BRKT, 1/2" & 3/4" KO	SIDES: (2) 1/2" & (1) CON 1/2" & 3/4" BOTTOM: (1) 1/2"	31.5	50	31

Square Boxes & Covers

4" Square Box Covers



Features & Benefits:

- Used to enclose 4" square box wiring
- Keyhole mounting holes for fast, easy installation.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
C7516-50	4" SQ BOX COVER, FLAT, BLANK			50	16
C7517-50	4" SQ BOX COVER, FLAT, 1/2" KO			50	16

Square Box Extensions & Rings

4" Square Box Extensions



Features & Benefits:

- 4" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire.
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed.
- Combination knockouts allow for greater wiring flexibility.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
E4511-50	4" SQ BOX EXTENSION, 1 1/2" DEEP, 1/2" KO	SIDES: (12) 1/2" BOTTOM: OPEN	21	50	21
E4512-50	4" SQ BOX EXTENSION, 1 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & (4) 3/4" BOTTOM: OPEN	21	50	21

4" Square Single Gang Device Rings



Features & Benefits:

- 4" square single device rings are used with 4" square boxes to mount switches, receptacles and devices.
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
C4450-50	4" SQ STEEL SINGLE GANG DEVICE RING, FLAT			50	9
C4452-50	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 1/4"		1.7	50	7
C4453-50	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 1/2"		3.5	50	11
C4454-50	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 5/8"		4.5	50	12
C4455-50	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 3/4"		5.5	50	13
C4456-25	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 1"		7.5	25	8
C4457-25	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 1 1/4"		9.4	25	9
C4458-25	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 1 1/2"		11.3	25	10
C4459-25	4" SQ STEEL SINGLE GANG DEVICE RING, RAISED 2"		14.5	25	12

Square Box Extensions & Rings

4" Square Double Gang Device Rings



Features & Benefits:

- 4" square device rings are used with 4" square boxes to mount switches, receptacles and devices.
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
RCC40	4" SQ STEEL DOUBLE GANG DEVICE RING, FLAT			50	9
R2242-50	4" SQ STEEL DOUBLE GANG DEVICE RING, RAISED 1/2"		5.4	50	13
R2243-50	4" SQ STEEL DOUBLE GANG DEVICE RING, RAISED 5/8"		7.0	50	13
R2244-50	4" SQ STEEL DOUBLE GANG DEVICE RING, RAISED 3/4"		8.5	50	13
R2245-25	4" SQ STEEL DOUBLE GANG DEVICE RING, RAISED 1"		11.6	25	13
R2246-25	4" SQ STEEL DOUBLE GANG DEVICE RING, RAISED 1 1/4"		14.7	25	13

4" Square to Round Device Rings



Features & Benefits:


- 4" square to round raised device rings are used to mount light fixtures in walls and ceilings
- Square to round device rings convert a 4" square box to a 3-1/2" round opening with 8-32 threaded mounting tabs for lighting retrofit applications.
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
C6500-50	4" SQ TO ROUND STEEL DEVICE RING, EARS 2 3/4" ON CENTRE, RAISED 1/2"		3	50	12
C6501-50	4" SQ TO ROUND STEEL DEVICE RING, EARS 2 3/4" ON CENTRE, RAISED 5/8"		4	50	17

Square Box Extensions & Rings

4" Industrial Covers

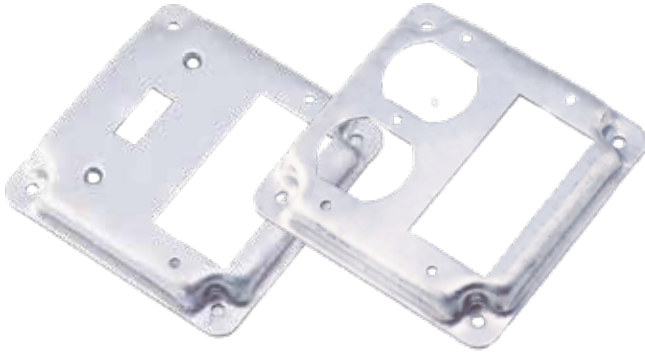

Features & Benefits:

- 4" square raised, exposed work device rings are used with 4" square boxes to mount switches, receptacles and devices in a commercial or industrial application.
- Crushed corners allow for use of standard box cover screws.
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
C2237-50	4" SQ STEEL INDUSTRIAL COVER, (1) GFI (1) DUPLEX RECEPTACLE, RAISED 5/8"		6.6	50	16
C2238-50	4" SQ STEEL INDUSTRIAL COVER, (1) GFI (1) TOGGLE SWITCH, RAISED 5/8"		6.6	50	16
C2239-50	4" SQ STEEL INDUSTRIAL COVER, (1) - GFI, RAISED 5/8"		6.6	50	16
C2240-50	4" SQ STEEL INDUSTRIAL COVER, (2) - GFI, RAISED 5/8"		6.6	50	16
C2242-50	4" SQ STEEL INDUSTRIAL COVER, (1) TOGGLE (1) DUPLEX RECEPTACLE, RAISED 5/8"		6.6	50	17
C2243-50	4" SQ STEEL INDUSTRIAL COVER, (2) - DUPLEX RECEPTACLE, RAISED 5/8"		6.6	50	14
C2244-50	4" SQ STEEL INDUSTRIAL COVER, (1) - 15A 1.406" DIAMETER, RAISED 5/8"		6.6	50	17
C2245-50	4" SQ STEEL INDUSTRIAL COVER, (2) - TOGGLE SWITCH, RAISED 5/8"		6.6	50	19
C2246-50	4" SQ STEEL INDUSTRIAL COVER, (1) - 40A/50A 2.155" DIAMETER, RAISED 5/8"		6.6	50	16
C2247-50	4" SQ STEEL INDUSTRIAL COVER, (1) - DUPLEX (1) - 15A 1.406" DIAMETER, RAISED 5/8"		6.6	50	16
C2249-50	4" SQ STEEL INDUSTRIAL COVER, (1) - TOGGLE SWITCH, RAISED 5/8"		6.6	50	19
C2250-50	4" SQ STEEL INDUSTRIAL COVER, (2) - 15A 1.406" DIAMETER, RAISED 5/8"		6.6	50	18
C2251-50	4" SQ STEEL INDUSTRIAL COVER, (1) - 20A 1.60" DIAMETER, RAISED 5/8"		6.6	50	18
C3451-50	4" SQ STEEL INDUSTRIAL COVER, (1) - DUPLEX RECEPTACLE, RAISED 5/8"		6.6	50	17
C3452-50	4" SQ STEEL INDUSTRIAL COVER, (1) - TOGGLE (1) - DUPLEX FLUSH RECEPTACLE, RAISED 5/8"		6.6	50	18
C3454-50	4" SQ STEEL INDUSTRIAL COVER, (1) - DUPLEX FLUSH RECEPTACLE, RAISED 5/8"		6.6	50	18



MC-75S Connector



C3451-50 4" Industrial Cover

Masonry Boxes

2 1/2" Deep Masonry Boxes



Features & Benefits:

- Masonry boxes are used as a junction box or to secure a wiring device in masonry block construction.
- 2-1/2" deep boxes are used in 4" block walls, 3-1/2" deep boxes are used in 6" or 8" block walls.
- Concentric combination knockouts.
- 6/32 Device Mounting Tab holes
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
MAB71	1 GANG MASONRY BOX, 2 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (6) 1/2" & 3/4" CONCENTRIC BOTTOM: (2) 1/2" & 3/4" CONCENTRIC	13.8	20	13.5
MAB72	2 GANG MASONRY BOX, 2 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & 3/4" CONCENTRIC BOTTOM: (4) 1/2" & 3/4" CONCENTRIC	30	20	12
MAB73	3 GANG MASONRY BOX, 2 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (10) 1/2" & 3/4" CONCENTRIC BOTTOM: (6) 1/2" & 3/4" CONCENTRIC	45	10	8.1
MAB74	4 GANG MASONRY BOX, 2 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (12) 1/2" & 3/4" CONCENTRIC BOTTOM: (8) 1/2" & 3/4" CONCENTRIC	59	5	3.5

3 1/2" Deep Masonry Boxes



Features & Benefits:

- Masonry boxes are used as a junction box or to secure a wiring device in masonry block construction.
- 2-1/2" deep boxes are used in 4" block walls, 3-1/2" deep boxes are used in 6" or 8" block walls.
- Concentric combination knockouts.
- 6/32 Device Mounting Tab holes
- Galvanized steel construction.



CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
MAB91	1 GANG MASONRY BOX, 3 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & 3/4" CONCENTRIC BOTTOM: (2) 1/2" & 3/4" CONCENTRIC	21	20	14
MAB92	2 GANG MASONRY BOX, 3 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (12) 1/2" & 3/4" CONCENTRIC BOTTOM: (4) 1/2" & 3/4" CONCENTRIC	44	10	10
MAB93	3 GANG MASONRY BOX, 3 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (16) 1/2" & 3/4" CONCENTRIC BOTTOM: (6) 1/2" & 3/4" CONCENTRIC	65	10	15
MAB94	4 GANG MASONRY BOX, 3 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (20) 1/2" & 3/4" CONCENTRIC BOTTOM: (8) 1/2" & 3/4" CONCENTRIC	87	5	9

Masonry Boxes

3 1/2" Deep Gangable Masonry Box



Features & Benefits:

- Gangable masonry boxes allow for greater flexibility during installation.
- 3-1/2" deep boxes are used in 6" or 8" block walls.
- Concentric combination knockouts.
- 6/32 Device Mounting Tab holes.
- Galvanized steel construction.




CAT #	DESCRIPTION	KNOCKOUTS	PACKAGE INFORMATION		
			CUBIC INCHES	CASE QTY	CASE WT
MAG91	GANGABLE MASONRY BOX, 3 1/2" DEEP, 1/2" & 3/4" KO	SIDES: (8) 1/2" & 3/4" CONCENTRIC BOTTOM: (2) 1/2" & 3/4" CONCENTRIC	21	20	14

MAB71 / MAB91 Masonry Box



Masonry Boxes

Adjustable Device Rings

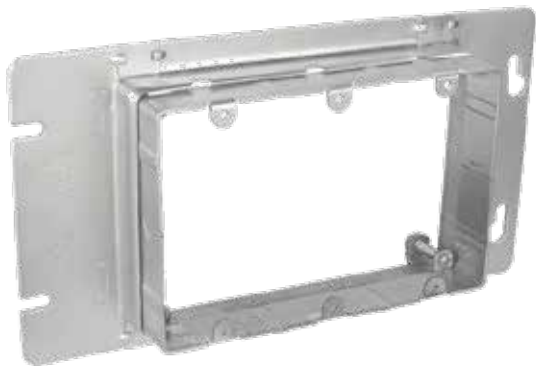

Features & Benefits:

- Adjustable device rings for multi-gang box installations allow for perfectly flush installations with securely fastened and well grounded devices.
- Adjustable 3/4" to 1 1/2"
- Device rings may be used in ceilings, walls and floors when finished surface depths are unknown, or questionable.
- Galvanized steel construction.



CAT #	DESCRIPTION	PACKAGE INFORMATION		
		CUBIC INCHES	CASE QTY	CASE WT
GBADR3	3 GANG ADJUSTABLE DEPTH, DEVICE RING 3/4" - 1 1/2"	16.5	25	22
GBADR4	4 GANG ADJUSTABLE DEPTH, DEVICE RING 3/4" - 1 1/2"	21.7	5	5
GBADR5	5 GANG ADJUSTABLE DEPTH, DEVICE RING 3/4" - 1 1/2"	27.1	5	6

Gang Box Device Rings



Features & Benefits:

- Perfect for exposed work applications, providing an easy method for the installation of electrical devices
- Raised device lip
- Slots allow for easy installation
- Galvanized steel construction.



CAT #	DESCRIPTION	PACKAGE INFORMATION		
		CUBIC INCHES	CASE QTY	CASE WT
GBDC12	2 GANG MULTI DEVICE RING 1/2" RAISED	8	20	10
GBDC13	3 GANG MULTI DEVICE RING 1/2" RAISED	11.5	20	11
GBDC14	4 GANG MULTI DEVICE RING 1/2" RAISED	14.8	10	6
GBDC15	5 GANG MULTI DEVICE RING 1/2" RAISED	17.5	10	7
GBDC16	6 GANG MULTI DEVICE RING 1/2" RAISED	20.3	5	4
GBDC23	3 GANG MULTI DEVICE RING 3/4" RAISED	17	20	11
GBDC24	4 GANG MULTI DEVICE RING 3/4" RAISED	21.5	10	8

FMC Fittings

Squeeze Type Straight Connector



Features & Benefits:

- Squeeze type connector used to connect flexible metal conduit to a box or enclosure.
- Zinc die cast construction.

Certifications: UL-514B



CAT #	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CARTON	MASTER CASE	CASE LBS
SQ-38	3/8"	SQUEEZE TYPE CONNECTOR	50	500	27
SQ-50	1/2"	SQUEEZE TYPE CONNECTOR	50	200	28
SQ-75	3/4"	SQUEEZE TYPE CONNECTOR	25	100	13
SQ-100	1"	SQUEEZE TYPE CONNECTOR	10	100	15
SQ-125	1 1/4"	SQUEEZE TYPE CONNECTOR	10	100	29
SQ-150	1 1/2"	SQUEEZE TYPE CONNECTOR	5	50	20
SQ-200	2"	SQUEEZE TYPE CONNECTOR	10	40	21
SQ-250	2 1/2"	SQUEEZE TYPE CONNECTOR		10	9
SQ-300	3"	SQUEEZE TYPE CONNECTOR		10	17
SQ-350	3 1/2"	SQUEEZE TYPE CONNECTOR		1	2
SQ-400	4"	SQUEEZE TYPE CONNECTOR		1	3

Squeeze Type 90° Connector



Features & Benefits:

- 90° Squeeze type connectors are used to connect flexible metal conduit to a box or enclosure.
- Zinc die cast construction.

Certifications: UL-514B



CAT #	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CARTON	MASTER CASE	CASE LBS
SQ90-38	3/8"	90° SQUEEZE CONNECTOR	50	500	45
SQ90-50	1/2"	90° SQUEEZE CONNECTOR	25	250	35
SQ90-75	3/4"	90° SQUEEZE CONNECTOR	10	100	20
SQ90-100	1"	90° SQUEEZE CONNECTOR	5	50	19
SQ90-125	1 1/4"	90° SQUEEZE CONNECTOR	10	40	8
SQ90-150	1 1/2"	90° SQUEEZE CONNECTOR		5	5
SQ90-200	2"	90° SQUEEZE CONNECTOR		5	6

FMC Fittings

Malleable Iron Squeeze Straight Connector

Features & Benefits:

- Straight squeeze type connectors are used to connect flexible metal conduit to a box or enclosure.
- Zinc plated malleable iron construction.



SQ-38M



SQ-50M~SQ-125M



SQ-150M~SQ-300M



SQ-350M~SQ-400M



Certifications: UL-514B

CAT#	TRADE SIZE	DIMENSIONS(IN)	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
SQ-38M	3/8"	STRAIGHT SQUEEZE CONNECTOR	25	250	30
SQ-50M	1/2"	STRAIGHT SQUEEZE CONNECTOR	20	200	24
SQ-75M	3/4"	STRAIGHT SQUEEZE CONNECTOR	10	100	19
SQ-100M	1"	STRAIGHT SQUEEZE CONNECTOR	5	50	13
SQ-125M	1 1/4"	STRAIGHT SQUEEZE CONNECTOR	5	50	19
SQ-150M	1 1/2"	STRAIGHT SQUEEZE CONNECTOR	2	20	13
SQ-200M	2"	STRAIGHT SQUEEZE CONNECTOR		20	21
SQ-250M	2 1/2"	STRAIGHT SQUEEZE CONNECTOR		10	14
SQ-300M	3"	STRAIGHT SQUEEZE CONNECTOR		2	4
SQ-350M	3 1/2"	STRAIGHT SQUEEZE CONNECTOR		1	5
SQ-400M	4"	STRAIGHT SQUEEZE CONNECTOR		1	7

Malleable Iron Squeeze Type 90° Connector

Features & Benefits:

- 90° Squeeze type connectors are used to connect flexible metal conduit to a box or enclosure.
- Zinc plated malleable iron construction.



SQ90-38M~SQ90-75M



SQ90-100M~SQ90-125M



SQ90-150M~SQ90-200M



SQ90-250M~SQ90-400M



Certifications: UL-514B

CAT#	TRADE SIZE	DIMENSIONS(IN)	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
SQ90-38M	3/8"	90° SQUEEZE CONNECTOR	20	200	32
SQ90-50M	1/2"	90° SQUEEZE CONNECTOR	10	100	16
SQ90-75M	3/4"	90° SQUEEZE CONNECTOR	10	100	30
SQ90-100M	1"	90° SQUEEZE CONNECTOR	2	20	12
SQ90-125M	1 1/4"	90° SQUEEZE CONNECTOR	2	20	38
SQ90-150M	1 1/2"	90° SQUEEZE CONNECTOR		5	5
SQ90-200M	2"	90° SQUEEZE CONNECTOR		5	10
SQ90-250M	2 1/2"	90° SQUEEZE CONNECTOR		1	4
SQ90-300M	3"	90° SQUEEZE CONNECTOR		1	4
SQ90-350M	3 1/2"	90° SQUEEZE CONNECTOR		1	9
SQ90-400M	4"	90° SQUEEZE CONNECTOR		1	11

Top-Bite Saddle Type Connectors

Straight Connectors



UCSI-385~UCSI-100S



UCSI-125M~UCSI-400M

Features & Benefits:

- Used to connect armored or metal clad cable or FMC to a box or an enclosure.
- Insulated throat, 105°C rated.
- Steel, Zinc Plated
- UCSI-125M to UCSI-400M are malleable iron construction.

Certifications: UL-514B



CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
UCSI-385	3/8"	Armored Cable, Steel	14/2-10/2	25	100	16.3
		Armored Cable, Aluminum	14/2-10/2			
		Metal Clad Cable, MCI, Steel	14/2-10/2			
		Metal Clad Cable, MCI, Aluminum	14/2-10/2			
		Metal Clad Cable, MCI-A	14/2-10/3			
		AC HCF, Steel	14/2-10/2			
		AC HCF, Aluminum	14/2-10/2			
		MCI-A HCF	14/2-10/3			
UCSI-50S	1/2"	FMC/RWFMCI/XRWFMC, Steel	3/8"	25	100	16.1
		FMC/RWFMCI/XRWFMC, Aluminum	3/8"			
		Armored Cable, Steel	12/4-6/3			
		Armored Cable, Aluminum	12/4-6/3			
		Metal Clad Cable, MCI, Steel	10/4-8/3			
		Metal Clad Cable, MCI, Aluminum	10/4-8/3			
		Metal Clad Cable, MCI-A	12/4-8/4			
		AC HCF, Steel	12/4-6/3			
UCSI-75S	3/4"	AC HCF, Aluminum	12/4-6/3	10	50	9.7
		MCI-A HCF	12/4-8/4			
		FMC/RWFMCI/XRWFMC, Steel	1/2"			
		FMC/RWFMCI/XRWFMC, Aluminum	1/2"			
		Armored Cable, Steel	6/4-4/3			
		Armored Cable, Aluminum	8/3-4/3			
		Metal Clad Cable, MCI, Steel	8/3-4/3			
		Metal Clad Cable, MCI, Aluminum	6/4, 4/3			
UCSI-100S	1"	Metal Clad Cable, MCI-A	8/4, 6/4	5	25	7.9
		AC HCF, Steel	6/4-4/3			
		AC HCF, Aluminum	8/3-4/3			
		MCI-A HCF	8/4, 6/4			
		FMC/RWFMCI/XRWFMC, Steel	3/4"			
		FMC/RWFMCI/XRWFMC, Aluminum	3/4"			
		Armored Cable, Steel	6/4-1/3			
		Armored Cable, Aluminum	6/4-1/3			
UCSI-125M	1 1/4"	Metal Clad Cable, MCI, Steel	6/4-3/4	5	25	16.5
		Metal Clad Cable, MCI, Aluminum	6/4-3/4			
		Metal Clad Cable, MCI-A	0.880 - 1.110			
		AC HCF, Steel	6/4-1/3			
		AC HCF, Aluminum	6/4-1/3			
		MCI-A HCF	0.880 - 1.110			
		FMC/RWFMCI/XRWFMC, Steel	1"			
		FMC/RWFMCI/XRWFMC, Aluminum	1"			
UCSI-150M	1 1/2"	Armored Cable, Aluminum	1.150 - 1.335	2	10	10.2
		Metal Clad Cable, MCI	1.200 - 1.635			
		AC HCF, Aluminum	1.150 - 1.335			
		FMC/RWFMCI/XRWFMC, Steel	1-1/4"			
UCSI-200M	2"	FMC/RWFMCI/XRWFMC, Aluminum	1-1/4"	5	7.1	7.1
		Metal Clad Cable, MCI	1.490 - 1.820			
		FMC/RWFMCI, Steel	1-1/2"			
UCSI-250M	2 1/2"	FMC/RWFMCI, Aluminum	1-1/2"	4	8.8	8.8
		Metal Clad Cable, MCI	2.270 - 2.950			
		FMC/RWFMCI, Steel	2-1/2"			
UCSI-300M	3"	FMC/RWFMCI, Aluminum	2-1/2"	5	12.1	12.1
		Metal Clad Cable, MCI	3.160 - 3.480			
		FMC/RWFMCI, Steel	3"			
UCSI-350M	3 1/2"	FMC/RWFMCI, Aluminum	3"	1	4.6	4.6
		Metal Clad Cable, MCI	3.620 - 4.060			
		RWFMCI, Steel	3-1/2"			
UCSI-400M	4"	RWFMCI, Aluminum	3-1/2"	1	6.0	6.0
		Metal Clad Cable, MCI	4.120 - 4.560			
		RWFMCI, Steel	4"			
		RWFMCI, Aluminum	4"			

45° Connectors



Features & Benefits:

- Used to connect armored or metal clad cable or FMC to a box or an enclosure.
- Insulated throat, 105°C rated
- Malleable iron construction.

Certifications: UL-514B

CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
UCSI45-38M	3/8"	Armored Cable, Steel	14/2-10/2	50	300	58.4
		Armored Cable, Aluminum	14/2-10/2			
		Metal Clad Cable, MCI, Steel	14/2-10/2			
		Metal Clad Cable, MCI, Aluminum	14/2-10/2			
		Metal Clad Cable, MCI-A	14/2-10/3			
		AC HCF, Steel	14/2-10/2			
		AC HCF, Aluminum	14/2-10/2			
		MCI-A HCF	14/2-10/3			
		FMC/RWFMC/XRWFMC, Steel	3/8"			
		FMC/RWFMC/XRWFMC, Aluminum	3/8"			
UCSI45-50M	1/2"	Armored Cable, Steel	12/4-6/3	25	150	39.7
		Armored Cable, Aluminum	12/4-6/3			
		Metal Clad Cable, MCI, Steel	10/4-8/3			
		Metal Clad Cable, MCI, Aluminum	10/4-8/3			
		Metal Clad Cable, MCI-A	12/4-8/4			
		AC HCF, Steel	12/4-6/3			
		AC HCF, Aluminum	12/4-6/3			
		MCI-A HCF	12/4-8/4			
		FMC/RWFMC/XRWFMC, Steel	1/2"			
		FMC/RWFMC/XRWFMC, Aluminum	1/2"			
UCSI45-75M	3/4"	Armored Cable, Steel	6/4-4/3	20	120	41.2
		Armored Cable, Aluminum	8/3-4/3			
		Metal Clad Cable, MCI, Steel	8/3-4/3			
		Metal Clad Cable, MCI, Aluminum	6/4, 4/3			
		Metal Clad Cable, MCI-A	8/4, 6/4			
		AC HCF, Steel	6/4-4/3			
		AC HCF, Aluminum	8/3-4/3			
		MCI-A HCF	8/4, 6/4			
		FMC/RWFMC/XRWFMC, Steel	3/4"			
		FMC/RWFMC/XRWFMC, Aluminum	3/4"			



90° Connectors



Features & Benefits:

- Used to connect armored or metal clad cable or FMC to a box or an enclosure.
- Insulated throat, 105°C rated
- Malleable iron construction.

Certifications: UL-514B



CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
UCSI90-38M	3/8"	Armored Cable, Steel	14/2-10/2	50	300	65.1
		Armored Cable, Aluminum	14/2-10/2			
		Metal Clad Cable, MCI, Steel	14/2-10/2			
		Metal Clad Cable, MCI, Aluminum	14/2-10/2			
		Metal Clad Cable, MCI-A	14/2-10/3			
		AC HCF, Steel	14/2-10/2			
		AC HCF, Aluminum	14/2-10/2			
		MCI-A HCF	14/2-10/3			
		FMC/RWFMC/XRWFMC, Steel	3/8"			
		FMC/RWFMC/XRWFMC, Aluminum	3/8"			
UCSI90-50M	1/2"	Armored Cable, Steel	12/4-6/3	25	150	45.2
		Armored Cable, Aluminum	12/4-6/3			
		Metal Clad Cable, MCI, Steel	10/4-8/3			
		Metal Clad Cable, MCI, Aluminum	10/4-8/3			
		Metal Clad Cable, MCI-A	12/4-8/4			
		AC HCF, Steel	12/4-6/3			
		AC HCF, Aluminum	12/4-6/3			
		MCI-A HCF	12/4-8/4			
		FMC/RWFMC/XRWFMC, Steel	1/2"			
		FMC/RWFMC/XRWFMC, Aluminum	1/2"			
UCSI90-75M	3/4"	Armored Cable, Steel	6/4-4/3	20	120	46.3
		Armored Cable, Aluminum	8/3-4/3			
		Metal Clad Cable, MCI, Steel	8/3-4/3			
		Metal Clad Cable, MCI, Aluminum	6/4, 4/3			
		Metal Clad Cable, MCI-A	8/4, 6/4			
		AC HCF, Steel	6/4-4/3			
		AC HCF, Aluminum	8/3-4/3			
		MCI-A HCF	8/4, 6/4			
		FMC/RWFMC/XRWFMC, Steel	3/4"			
		FMC/RWFMC/XRWFMC, Aluminum	3/4"			
UCSI90-100M	1"	Armored Cable, Steel	6/4-1/3	5	60	36.6
		Armored Cable, Aluminum	6/4-1/3			
		Metal Clad Cable, MCI, Steel	6/4-3/4			
		Metal Clad Cable, MCI, Aluminum	6/4-3/4			
		Metal Clad Cable, MCI-A	0.880 - 1.110			
		AC HCF, Steel	6/4-1/3			
		AC HCF, Aluminum	6/4-1/3			
		MCI-A HCF	0.880 - 1.110			
		FMC/RWFMC/XRWFMC, Steel	1"			
		FMC/RWFMC/XRWFMC, Aluminum	1"			

FMC Screw-In Connectors




Features & Benefits:

- Used to connect flexible metal conduit to box or enclosure.
- Zinc die cast

Certifications: UL-514B

CAT#	TRADE SIZE	K.O. SIZE	Dimensions (inch)		PACKAGE INFORMATION		
			A	B	INNER CASE	MASTER CASE	WT LBS
FSC-38	3/8"	1/2"	1.24	1.10	50	500	23.6
FSC-50	1/2"	1/2"	1.32	1.10	50	500	25.4
FSC-75	3/4"	3/4"	1.58	1.36	25	250	20.9
FSC-100	1"	1"	1.82	1.69	25	250	32.9
FSC-125	1 1/4"	1 1/4"	2.06	2.12	10	100	24.1
FSC-150	1 1/2"	1 1/2"	2.31	2.37	10	40	12.9
FSC-200	2"	2"	2.52	2.90	10	40	18.4

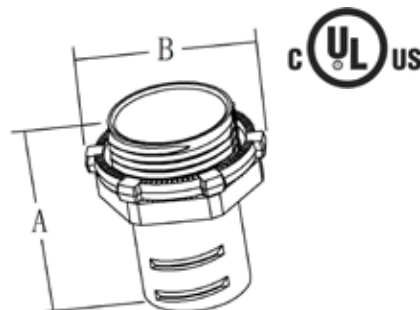

FMC Screw-In Connectors with Insulated Throat




Features & Benefits:

- Used to connect flexible metal conduit to box or enclosure.
- Insulated throat
- Zinc die cast

Certifications: UL-514B

CAT#	TRADE SIZE	K.O. SIZE	Dimensions (inch)		PACKAGE INFORMATION		
			A	B	INNER CASE	MASTER CASE	WT LBS
FSCI-38	3/8"	1/2"	1.24	1.10	50	500	23.6
FSCI-50	1/2"	1/2"	1.32	1.10	50	500	25.4
FSCI-75	3/4"	3/4"	1.58	1.36	25	250	20.9
FSCI-100	1"	1"	1.82	1.69	25	250	32.9
FSCI-125	1 1/4"	1 1/4"	2.06	2.12	10	100	24.1
FSCI-150	1 1/2"	1 1/2"	2.31	2.37	10	40	12.9
FSCI-200	2"	2"	2.52	2.90	10	40	18.4

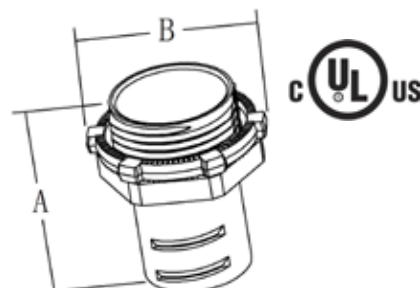

FMC Screw-In Couplings




Features & Benefits:

- Used to join two lengths of flexible metal conduit.
- Zinc die cast

Certifications: UL-514B

CAT#	TRADE SIZE	Dimensions (inch)			PACKAGE INFORMATION		
		A	B	C	INNER CASE	MASTER CASE	WT LBS
FSK-50	1/2"	0.63	1.78	1.00	50	500	21.0
FSK-75	3/4"	0.81	2.06	1.21	25	250	17.4

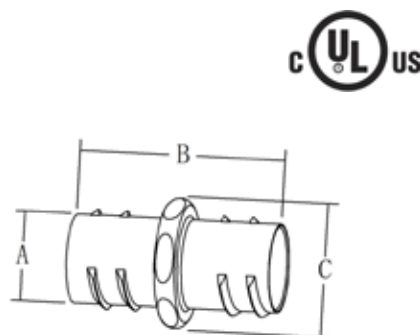

AC & MC Cable Connectors

AC Connectors



Features & Benefits:

- Use to connect armored cable to box or enclosure.
- Set screw installation
- Zinc die cast

Certifications: UL-514b

CAT#	TRADE SIZE	K.O. SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
BX-38	3/8"	1/2"	ARMORED CABLE, STEEL	14/2 – 10/3	100	1000	46.3
			ARMORED CABLE, ALUMINUM	14/2 – 10/3			



Low Profile Saddle Bite Connectors



Features & Benefits:

- Single Screw Saddle type Low-Profile connectors are used to connect armored cable or metal clad cable to a box or enclosure.
- For use in dry locations.
- Zinc Die Cast construction.

Certifications: UL-514B

CAT#	TRADE SIZE	K.O. SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
SG-38	3/8"	1/2"	ARMORED CABLE, STEEL	14/2 - 10/4	25	250	20
			ARMORED CABLE, ALUMINUM	14/2 - 10/4			
			METAL CLAD CABLE, MCI, STEEL	14/2 - 10/4			
			METAL CLAD CABLE, MCI, ALUMINUM	14/2 - 10/4			
			METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 - 10/4			
			METAL CLAD CABLE, MCC ALUMINUM	14/2			
			FMC/RWFMC, STEEL	3/8"			
			FMC/RWFMC ALUMINUM	3/8"			



Low Profile Saddle Bite Duplex Connectors



Features & Benefits:

- Used to connect steel or aluminum flexible metal conduit, AC and MC cables to box or enclosure.
- Zinc die cast

Certifications: UL-514B

CAT#	TRADE SIZE	K.O. SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
SG-3838	3/8"	1/2"	Armored Cable, Steel	14/2 – 10/3	10	100	12.0
			Armored Cable, Aluminum	14/2 – 10/3			
			Metal Clad Cable, MCI, Steel	14/2 – 10/3			
			Metal Clad Cable, MCI, Aluminum	14/2 – 10/3			
			Metal Clad Cable, MCI-A, Aluminum	14/2 – 10/3			
			Metal Clad Cable, MCC Aluminum	14/2			
			FMC/RWFMC, Steel	3/8			
			FMC/RWFMC, Aluminum	3/8			



AC & MC Single Cable Connectors

Saddle Connectors



Features & Benefits:

- Single Screw Saddle type connector used to connect armored cable or metal clad cable to a box or enclosure.
- For use in dry locations.
- Zinc Die Cast construction.

Certifications: UL-514B

CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
MC-SAD-38S	3/8"	ARMORED CABLE, STEEL	14/2 - 8/2	50	500	33
		ARMORED CABLE, ALUMINUM	14/2 - 8/2			
		HCF ARMORED CABLE, STEEL	14/2 - 8/2			
		HCF ARMORED CABLE, ALUMINUM	14/2 - 8/2			
		METAL CLAD CABLE, MCI, STEEL	14/2 - 10/4			
		METAL CLAD CABLE, MCI, ALUMINUM	14/2 - 10/4			
		METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 - 10/4			
		HCF, MCI-A	14/2 - 10/4			
		FMC / RWFC / XRWFC, STEEL	3/8"			
		FMC / RWFC / XRWFC, ALUMINUM	3/8"			
		NM CABLE	14/2 - 12/3			
		MC - PCS	14/2 - 12/3			



Two Screw - Strap Type Multi-Purpose Connector

Features & Benefits:



- Multi-purpose connector is used to connect armored cable metal clad cable, NM, flex cord or FMC to a box or enclosure.
- For use in dry locations.
- Zinc Die Cast construction.

Certifications: UL-514B

CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
MNC-38	1/2"	ARMORED CABLE, STEEL	14/2 - 10/3	100	1000	45
		ARMORED CABLE, ALUMINUM	14/2 - 10/3			
		HCF ARMORED CABLE, STEEL	14/2 - 10/3			
		HCF ARMORED CABLE, ALUMINUM	14/2 - 10/3			
		METAL CLAD CABLE, MCI, STEEL	14/2 - 10/3			
		METAL CLAD CABLE, MCI, ALUMINUM	14/2 - 10/3			
		METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 - 10/3			
		HCF, MCI-A	14/2 - 10/3			
		FMC / RWFC / XRWFC, STEEL	3/8"			
		FMC / RWFC / XRWFC, ALUMINUM	3/8"			
		NM CABLE	14/2 - 10/3			
		SJO, FLEXIBLE CORD	12/2 - 12/3			



Single Screw, Saddle Type Connectors



BL-16

BL-17~BL-19

Features & Benefits:

- Used to connect AC/MC/FMC/MCI-A and NM cable to box or enclosure
- Tighten screw with strap depression between cable convolutions
- Zinc die cast



Certifications: UL-514B

CAT#	TRADE SIZE	K.O. SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
BL-16	3/8"	1/2"	Armored Cable, Steel	14/2 – 10/3	50	500	27.8
			Armored Cable, Aluminum	14/2 – 10/3			
			HCF Armored Cable, Steel	14/2 – 10/3			
			HCF Armored Cable, Aluminum	14/2 – 10/3			
			Metal Clad Cable, MCI, Steel	14/2 – 10/3			
			Metal Clad Cable, MCI, Aluminum	14/2 – 10/3			
			Metal Clad Cable, MCI-A, Aluminum	14/2 – 10/4			
			HCF MCI-A	14/2 – 10/4			
			FMC/RWFMFC, Steel	3/8"			
			FMC/RWFMFC, Aluminum	3/8"			
			NM cable	14/2 – 8/3			
			Flexible Cord, SJO	18/3 – 12/3			
			MC-PCS	12/2 – 10/2			
BL-17	1/2"	1/2"	Armored Cable, Steel	8/3 – 6/3	50	200	23.6
			Armored Cable, Aluminum	8/3 – 6/3			
			HCF Armored Cable, Steel	8/3 – 6/3			
			HCF Armored Cable, Aluminum	8/3 – 6/3			
			Metal Clad Cable, MCI, Steel	8/3 – 6/3			
			Metal Clad Cable, MCI, Aluminum	8/3 – 6/3			
			Metal Clad Cable, MCI-A, Aluminum	8/3 – 6/3			
			HCF MCI-A	8/3 – 6/3			
			FMC/RWFMFC, Steel	1/2"			
			FMC/RWFMFC, Aluminum	1/2"			
			NM cable	8/3 – 6/3			
BL-18	3/4"	3/4"	Armored Cable, Steel	6/3 – 6/4	25	100	19.4
			Armored Cable, Aluminum	6/3 – 6/4			
			HCF Armored Cable, Steel	6/3 – 6/4			
			HCF Armored Cable, Aluminum	6/3 – 6/4			
			Metal Clad Cable, MCI, Steel	6/3 – 4/3			
			Metal Clad Cable, MCI, Aluminum	6/3 – 4/3			
			Metal Clad Cable, MCI-A, Aluminum	6/4			
			HCF MCI-A	6/4			
			FMC/RWFMFC, Steel	3/4"			
			FMC/RWFMFC, Aluminum	3/4"			
BL-19	1"	1"	Armored Cable, Steel	2/4	10	100	27.1
			Armored Cable, Aluminum	2/4			
			HCF Armored Cable, Steel	2/4			
			HCF Armored Cable, Aluminum	2/4			
			Metal Clad Cable, MCI, Steel	1/3 – 1/0-3			
			Metal Clad Cable, MCI, Aluminum	1/3 – 1/0-3			
			Metal Clad Cable, MCI-A, Aluminum	6/4			
			HCF MCI-A	6/4			
			FMC/RWFMFC, Steel	1"			
			FMC/RWFMFC, Aluminum	1"			

AC & MC Single Cable Connectors

Steel Connectors



Features & Benefits:

- Single Cable Connectors are used to connect armored, metal clad cable or flexible metallic conduit to a box or enclosure
- Steel construction..

Certifications: UL-514B

CAT#	K.O. SIZE	DESCRIPTION	CABLE SIZES	INNER CASE	PACKAGE INFORMATION	
					MASTER CASE	WT LBS
MC-38S	1/2"	Armored Cable, Steel	14/2 – 10/3	50	500	39.6
		Armored Cable, Aluminum	14/2 – 10/3			
		HCF Armored Cable, Steel	14/2 – 10/3			
		HCF Armored Cable, Aluminum	14/2 – 10/3			
		Metal Clad Cable, MCI, Steel	14/2 – 10/3			
		Metal Clad Cable, MCI, Aluminum	14/2 – 10/3			
		Metal Clad Cable, MCI-A, Aluminum	14/2 – 10/3			
		HCF MCI-A	14/2 – 10/3			
		MC-PCS	12-2 – 12-3			
		FMC/RWFMC/XRWFMC, steel	3/8			
		FMC/RWFMC/XRWFMC, Aluminum	3/8			
MCA-50S	1/2"	Armored Cable, Steel	10/4 – 6/3	25	250	31.9
		Armored Cable, Aluminum	10/3 – 6/3			
		HCF Armored Cable, Steel	10/4 – 6/3			
		HCF Armored Cable, Aluminum	10/3 – 6/3			
		Metal Clad Cable, MCI, Steel	10/3 – 8/3			
		Metal Clad Cable, MCI, Aluminum	10/3 – 8/3			
		Metal Clad Cable, MCI-A, Aluminum	8/3			
		HCF MCI-A	8/3			
		FMC/RWFMC/XRWFMC, steel	1/2			
		FMC/RWFMC/XRWFMC, Aluminum	1/2			
MC-75S	3/4"	Armored Cable, Steel	10/3 – 6/3	25	250	30.8
		Armored Cable, Aluminum	10/3 – 6/3			
		HCF Armored Cable, Steel	10/3 – 6/3			
		HCF Armored Cable, Aluminum	10/3 – 6/3			
		Metal Clad Cable, Steel	10/3 – 6/3			
		Metal Clad Cable, MCI, Aluminum	10/3 – 6/3			
		Metal Clad Cable, MCI-A, Aluminum	8/3 - 6/3			
		FMC/RWFMC/XRWFMC, steel	1/2"			
		FMC/RWFMC/XRWFMC, Aluminum	1/2"			
		MC-PCS	12/2 - 12/3			



Duplex Connectors

Single Screw BX Connectors



Certifications: UL-514B

Features & Benefits:

- Consistent Quality – East Electrical Connectors are manufactured for long life, durability, and strength.
- For use in dry locations to connect flexible metallic conduit and steel AC cable to a box, load center or enclosure.

Standard Materials:

- Zinc plated steel
- Screw - Zinc Plated Steel



CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
DMC-38S	3/8"	ARMORED CABLE, STEEL	14/2 - 10/3	25	250	30
		ARMORED CABLE, ALUMINUM	14/2 - 12/4			
		HCF ARMORED CABLE, STEEL	14/2 - 10/3			
		HCF ARMORED CABLE, ALUMINUM	14/2 - 12/4			
		METAL CLAD CABLE, MCI STEEL	14/2 - 12/4			
		METAL CLAD CABLE, MCI ALUMINUM	14/2 - 12/4			
		METAL CLAD CABLE, MCI-A, ALUMINUM	12/4 - 10/3			
		FMC / RWFC, STEEL	3/8"			
		FMC / RWFC, ALUMINUM	3/8"			
		MC - PCS	12/2 - 12/3			

Single Screw BX Connectors



Certifications: UL-514B

Features & Benefits:

- Duplex connectors are used to connect armored or metal clad cable or flexible metal conduit to a box or enclosure.
- Zinc Die Cast construction.



CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
DCA-38	3/8"	ARMORED CABLE, STEEL	14/2 - 12/4	25	250	24
		ARMORED CABLE, ALUMINUM	14/2 - 12/4			
		METAL CLAD CABLE, MCI STEEL	14/2 - 12/4			
		METAL CLAD CABLE, MCI ALUMINUM	14/2 - 12/4			
		METAL CLAD CABLE, MCI-A, ALUMINUM	12/4 - 10/3			
		FMC / RWFC, STEEL	3/8"			
		FMC / RWFC, ALUMINUM	3/8"			

2 Screw Clamp Type Duplex Connector



Features & Benefits:

- Duplex connectors are used to connect armored or metal clad cable or flexible metal conduit to a box or enclosure.
- Zinc die cast construction.

Certifications: UL-514B

CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
DC-38	3/8"	Armored Cable, Steel	14/2 – 10/3	25	250	26.4
		Armored Cable, Aluminum	14/2 – 10/3			
		Metal Clad Cable, MCI, Steel	14/2 – 10/3			
		Metal Clad Cable, MCI, Aluminum	14/2 – 10/3			
		Metal Clad Cable, MCI-A, Aluminum	14/2 – 10/3			
		FMC/RWFMCI/XRWFMCI, Steel	3/8			
		FMC/RWFMCI/XRWFMCI, Aluminum	3/8			



90 Degree Duplex Connector




Features & Benefits:

- Duplex connectors are used to connect flexible metal conduit to a box or enclosure.
- 2 screw clamp
- Zinc die cast construction.

Certifications: UL-514B

CAT#	TRADE SIZE	Dimensions (inch)			PACKAGE INFORMATION		
		A	B	C	INNER CASE	MASTER CASE	WT LBS
DC90-38	3/8"	2.02	1.64	1.24	25	250	29.6

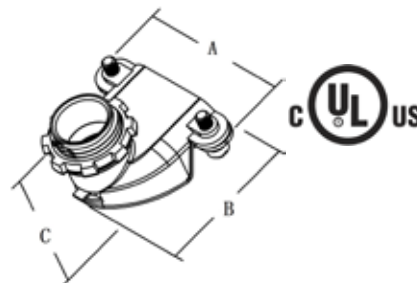

Take-all Connectors



Features & Benefits:

- Used to connect NM/SE or SER cable, flexible metal conduit and AC/MC/MCI-A cable to box or enclosure.
- Zinc die cast

Certifications: UL-514B



CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZES	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
TA-50	1/2"	Armored Cable, Steel	8/2 – 6/3	25	250	22.4
		Armored Cable, Aluminum	8/2 – 6/3			
		Metal Clad Cable, MCI, Steel	8/3 – 6/2			
		Metal Clad Cable, MCI, Aluminum	8/3 – 6/3			
		Metal Clad Cable, MCI-A, Aluminum	8/3 – 6/3			
		FMC/RWFCM, Steel	1/2			
		FMC/RWFCM, Aluminum	1/2			
		NM cable	14/2 – 12/3			
TA-75	3/4"	Service Entrance Cable, SER	8/3	20	200	24.9
		Armored Cable, Steel	6/3 – 4/2			
		Armored Cable, Aluminum	4/3			
		Metal Clad Cable, MCI, Steel	4/3 – 2/3			
		Metal Clad Cable, MCI, Aluminum	4/3 – 2/3			
		FMC/RWFCM, Steel	3/4			
		FMC/RWFCM, Aluminum	3/4			
		NM cable	14/3 – 8/3			
TA-100	1"	Service Entrance Cable, SER	8/3 – 6/3	10	100	16.9
		Metal Clad Cable, MCI, Steel	1/3 – 1/0-3			
		Metal Clad Cable, MCI, Aluminum	1/3 – 1/0-3			
		FMC/RWFCM, Steel	1			
		FMC/RWFCM, Aluminum	1			
		NM cable	10/3 – 6/3			
TA-125	1 1/4"	Service Entrance Cable, SEU	4/3	10	100	23.5
		Metal Clad Cable, MCI, Steel	1/0-4 – 2/0-4			
		FMC/RWFCM, Steel	1-1/4			
		FMC/RWFCM, Aluminum	1-1/4			
TA-150	1 1/2"	NM cable	8/3 – 2/3	5	50	16.7
		Metal Clad Cable, MCI, Steel	4/0-4 – 250-4			
		FMC/RWFCM, Steel	1-1/2			
		FMC/RWFCM, Aluminum	1-1/2			
TA-200	2"	NM cable	2/3	5	50	20.7
		Metal Clad Cable, MCI, Steel	350-4 – 400-4			
		FMC/RWFCM, Steel	2			
		FMC/RWFCM, Aluminum	2			

BX Connectors



Features & Benefits:

- Duplex connectors are used to connect armored or metal clad cable or flexible metal conduit to a box or enclosure.
- Zinc die cast construction.

Certifications: UL-514B

CAT#	TRADE SIZE	DESCRIPTION	CABLE SIZE	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
MC-DX-38	3/8"	ARMORED CABLE, STEEL	14/2 - 10/3	25	250	24
		ARMORED CABLE, ALUMINUM	14/2 - 10/3			
		METAL CLAD CABLE, STEEL	10/3			
		METAL CLAD CABLE, ALUMINUM	10/3			
		METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 - 10/4			
		FMC / RWFC, STEEL	3/8"			
		FMC / RWFC, ALUMINUM	3/8"			
		NM CABLE	14/2 - 12/3			



AC & MC Fittings

BX One Hole Strap




Features & Benefits:

- Used to secure AC or MC cable to wood, masonry or similar surfaces.
- Inverted rib provides extra strength
- Zinc Plated Steel construction

Certifications: UL-2239

CAT #	DESCRIPTION		PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	CASE LBS
OHS-1S	ARMORED CABLE	14/2 - 12/2	100	1000	9
	METAL CLAD CABLE, MCI	14/2 - 12/2			
	FMC / RWFC / XRWFC	5/16"			

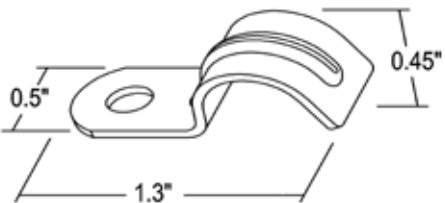

Flexible Conduit

Steel



Features & Benefits:

- Consistent Quality – East Electrical Flexible Steel Conduit is manufactured for long life; durability and strength, and suitable for bending. The conduit is produced to ensure quality standards are strictly met. The product is easy to cut, bend and join on the job.
- Excellent Inner-Diameter Smoothness.
- Lower Life-Cycle Costs – Our Conduit resists cracking, flaking, peeling, impact, and damage from severe bending. Its physical and mechanical properties ensure that the pipe has an extended Life Cycle.



Certifications: UL-1

CAT#	TRADE SIZE	UNIT CTN	OUTSIDE DIAMETER		INSIDE DIAMETER		WT /100 ft LBS	PACKAGE INFORMATION	
			MIN IN	MAX IN	MIN IN	MAX IN		MASTER CASE	WT LBS
RWS-38100	3/8"	COIL	.555	.571	.374	.376	15.9	100'	15.9
RWS-50100	1/2"	COIL	.850	.866	.618	.634	16	100'	16
RWS-50500	1/2"	REEL	.850	.866	.618	.634	16	500'	80
RWS-501000	1/2"	REEL	.850	.866	.618	.634	16	1000'	160
RWS-50100UL	1/2"	COIL	.850	.866	.618	.634	16	100'	16
RWS-75100	3/4"	COIL	1.043	1.063	.827	.846	16	100'	16
RWS-75300	3/4"	REEL	1.043	1.063	.827	.846	16	300'	48
RWS-75500	3/4"	REEL	1.043	1.063	.827	.846	16	500'	80
RWS-75100UL	3/4"	COIL	1.043	1.063	.827	.846	16	100'	16
RWS-751000UL	3/4"	REEL	1.043	1.063	.827	.846	16	1000'	160
RWS-100100	1"	COIL	1.280	1.299	1.039	1.059	50	100'	50
RWS-100200	1"	REEL	1.280	1.299	1.039	1.059	50	200'	100
RWS-100300	1"	REEL	1.280	1.299	1.039	1.059	50	300'	150
RWS-10050UL	1"	COIL	1.280	1.299	1.039	1.059	50	50'	25
RWS-12550	1 1/4"	COIL	1.512	1.535	1.319	1.343	52	50'	26
RWS-125200	1 1/2"	REEL	1.827	1.850	1.496	1.520	63	200'	126
RWS-15050	1 1/2"	COIL	1.827	1.850	1.496	1.520	63	150'	95
RWS-150100	1 1/2"	REEL	1.827	1.850	1.496	1.520	63	50'	32
RWS-20025	2"	COIL	2.335	2.362	2.047	2.075	81	25'	21
RWS-200100	2"	REEL	2.335	2.362	2.047	2.075	81	100'	81
RWS-25025	2 1/2"	COIL						25'	
RWS-30025	3"	COIL						25'	
RWS-35025	3 1/2"	COIL						25'	
RWS-40025	4"	COIL						25'	



Flexible Conduit

Aluminum



Features & Benefits:

- Consistent Quality – East Electrical Flexible Steel Conduit is manufactured for long life; durability and strength, and suitable for bending. The conduit is produced to ensure quality standards are strictly met. The product is easy to cut, bend and join on the job.
- Excellent Inner-Diameter Smoothness.
- Lower Life-Cycle Costs – Our Conduit resists cracking, flaking, peeling, impact, and damage from severe bending. Its physical and mechanical properties ensure that the pipe has an extended Life Cycle.



Certifications: UL-1

CAT#	TRADE SIZE	UNIT CTN	OUTSIDE DIAMETER		INSIDE DIAMETER		WT /100 ft LBS	PACKAGE INFORMATION	
			MIN IN	MAX IN	MIN IN	MAX IN		MASTER CASE	WT LBS
RWA-38100	3/8"	COIL	0.560	0.610	0.375	0.393	7	100'	7
RWA-38250	3/8"	REEL	0.560	0.610	0.375	0.393	7	250'	17.5
RWA-50100	1/2"	COIL	0.860	0.920	0.625	0.645	9.4	100'	9.4
RWA-501000	1/2"	REEL	0.860	0.920	0.625	0.645	9.4	1000'	94
RWA-75100	3/4"	COIL	1.045	1.105	0.812	0.835	12.5	100'	12.5
RWA-75500	3/4"	REEL	1.045	1.105	0.812	0.835	12.5	500'	62.5
RWA-10050	1"	COIL	1.300	1.380	1.000	1.040	19.6	50'	9.8
RWA-100300	1"	REEL	1.300	1.380	1.000	1.040	19.6	300'	58.8
RWA-12550	1 1/4"	COIL	1.550	1.630	1.250	1.300	23.9	50'	11.95
RWA-125200	1 1/2"	REEL	1.850	1.950	1.500	1.575	31.1	200'	62.2
RWA-15025	1 1/2"	COIL	1.850	1.950	1.500	1.575	31.1	25'	7.8
RWA-150100	1 1/2"	REEL	1.850	1.950	1.500	1.575	31.1	100'	31.1
RWA-20025	2"	COIL	2.350	2.450	2.000	1.080	40.2	25'	10
RWA-200100	2"	REEL	2.350	2.450	2.000	1.080	40.2	100'	40.2
RWA-25025	2 1/2"	COIL	2.860	3.060			65.6	25'	16.4
RWA-30025	3"	COIL	3.360	6.560			67.5	25'	16.9
RWA-35025	3 1/2"	COIL	3.860	4.060			76.0	25'	19
RWA-40025	4"	COIL					77.3	25'	19.4



NM Cable Fittings

Two-Screw Strap Type NM & SE Connectors


Features & Benefits:

- For use in connecting NM, SE cable and flexible cord to a box or enclosure..
- Zinc Die Cast construction



Certifications: UL-514B

CAT#	TRADE SIZE	A Width IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
NC-38	3/8"	1.18	0.80	5.00	100	1000	50
NC-75	3/4"	1.67	0.94	1.78	25	250	24
NC-100	1"	1.93	1.10	4.30	10	100	13
NC-125	1 1/4"	2.21	1.22	18.9	10	100	19
NC-150	1 1/2"	2.58	1.41	27.9	10	100	28
NC-200	2"	2.98	1.48	38.8	5	50	19

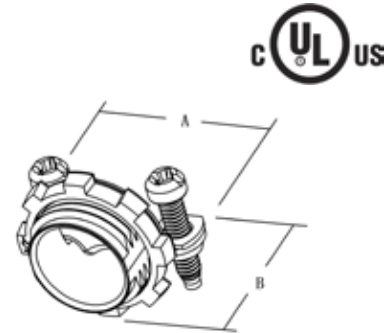

Two-Screw Strap Type NM & SEU Connectors


Features & Benefits:

- For use in connecting NM, and SEU cable to a box or enclosure.
- Zinc Die Cast construction.



Certifications: UL-514B

CAT#	TRADE SIZE	A Width IN	B LENGTH IN	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
RC-125	1 1/4"	2.26	1.29	20.21	10	100	20
RC-150	1 1/2"	2.84	1.30	26.32	10	100	27
RC-200	2"	3.48	1.51	40.85	5	50	21

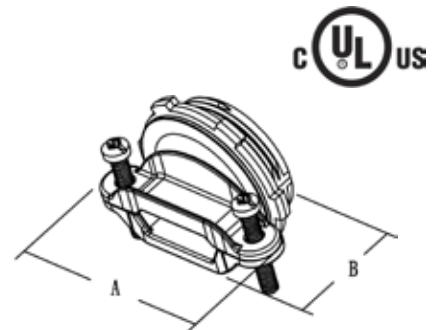

PVC "Snap-In" Type Connectors



Features & Benefits:

- For connecting nonmetallic cable to box or enclosure.
- Locknut not required.
- PVC construction.
- Rated to 105°C.



Certifications: UL-514B

CAT#	TRADE SIZE	SINGLE CABLE	DOUBLE CABLE	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
PBC-50NM	1/2"	14/2 - 10/3	14/2、 12/2、 14/3	100	1000	11
PBC-75NM	3/4"	8/3 - 6/3		50	500	8

Quick-Lock Connectors



Features & Benefits:

- Used to connect non-metallic sheathed cable to steel outlet box or other metal enclosure.
- Polypropylene



Certifications: UL 514B

CAT#	TRADE SIZE	K.O. SIZE	NM Cable Range	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
HLC-38P	3/8"	1/2"	14/2-10/3	100	1000	5.1
HLC-75P	3/4"	3/4"	14/3-6/3	50	500	4.6
DHLC-38P	3/8"	1/2"	2x14/2 or 2x12/2 1x14/2 & 1x12/2 1x14/2 & 1x10/2 1x12/2 & 1x10/2	50	500	7.1

Steel Cord Grips




Features & Benefits:

- Color coded elastomer bushings for cable diameter to fast identification of proper application.
- Male Tapered thread NPT
- Watertight sealing
- Steel, zinc plated

Certifications: UL 514B

CAT#	TRADE SIZE	Grommet Color	Cord Range	Dimensions (inch)		PACKAGE INFORMATION		
				A	B	INNER CASE	MASTER CASE	WT LBS
SRC-50-250S	1/2"	RED	.125-.250	1.11	1.23	25	250	31.2
SRC-50-350S	1/2"	WHITE	.250-.350	1.11	1.23	25	250	30.8
SRC-50-450S	1/2"	BLUE	.350-.450	1.11	1.23	25	250	31.2
SRC-50-560S	1/2"	GREEN	.450-.560	1.11	1.23	25	250	30.8
SRC-50-650S	1/2"	BEIGE	.560-.650	1.11	1.23	25	250	30.8
SRC-75-250S	3/4"	RED	.125-.250	1.33	1.38	25	250	50.3
SRC-75-350S	3/4"	WHITE	.250-.350	1.33	1.38	25	250	52.5
SRC-75-450S	3/4"	BLUE	.350-.450	1.33	1.38	25	250	49.9
SRC-75-560S	3/4"	GREEN	.450-.560	1.33	1.38	25	250	48.7
SRC-75-650S	3/4"	BEIGE	.560-.650	1.33	1.38	25	250	47.3
SRC-75-750S	3/4"	YELLOW	.650-.750	1.33	1.38	25	250	47.5
SRC-75-850S	3/4"	PURPLE	.750-.850	1.33	1.38	25	250	43.1
SRC-100-560S	1"	GREEN	.450-.550	1.63	1.61	10	100	28.9
SRC-100-650S	1"	BEIGE	.550-.650	1.63	1.61	10	100	28.9
SRC-100-750S	1"	YELLOW	.650-.750	1.63	1.61	10	100	28.5
SRC-100-850S	1"	PURPLE	.750-.850	1.63	1.61	10	100	28.0
SRC-100-950S	1"	GRAY	.850-.950	1.63	1.61	10	100	30.1
SRC-100-1050S	1"	BLACK	.950-1.050	1.63	1.61	10	100	30.0



Weatherproof Boxes & Covers

AnyCover™



14-IN-1 Configuration Inserts:

Duplex	GFCI	Toggle	1-3/8" Round	1-9/16"-1-5/8" Round	1-11/16" Round	2-1/8" Round
Duplex Adapter	GFCI Adapter	2-1/8" Adapter 1-9/16"-1-5/8" Ring Toggle Adapter	2-1/8" Adapter 1-9/16"-1-5/8" Ring 1-3/8" Ring	2-1/8" Adapter 1-9/16"-1-5/8" Ring	2-1/8" Adapter 1-11/16" Ring	2-1/8" Adapter

31-IN-1 Configuration Inserts:

2 5/8" Round	2 1/8" Round	1 9/16-1 5/8" Round	1 11/16" Round	1 3/8" Round	Switch
Double Duplex	Duplex GFCI	1 5/8" Round	1 3/8" Round	Duplex Switch	
GFCI Duplex	Double GFCI	1 5/8" Round	1 3/8" Round	GFCI Switch	
1 5/8" Round Duplex	1 5/8" Round GFCI	Double 1 5/8" Round	1 5/8" Round 1 3/8" Round	1 5/8" Round Switch	
1 3/8" Round Duplex	1 3/8" Round GFCI	1 3/8" Round 1 5/8" Round	Double 1 3/8" Round	1 3/8" Round Switch	
Switch Duplex	Switch GFCI	Switch 1 5/8" Round	Switch 1 3/8" Round	Double Switch	

WIU-1P/WIUD-1P



WIUD-2P



Features & Benefits:

- Patented building-block adapter provides flexibility in receptacle configuration.
- Snap-In Templates
- Single-Gang Mounts Horizontally or Vertically.
- Lockable
- Swivel Device Adapter requires no tools to install
- Latching tab secures cover closed
- Extra large cord opening
- Meets 2014 NEC Article 406.9 (B)(1) Extra Duty Specification.
- Sturdy polycarbonate construction for long life

Certifications: UL-514C



CAT #	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CARTON	MASTER CASE	CASE LBS
WIU-1P	1-GANG	14-IN-1, SHALLOW TYPE		24	11.2
WIUD-1P	1-GANG	14-IN-1, DEEP TYPE		24	13.0
WIUD-2P	2-GANG	31-IN-1, DEEP TYPE		10	6.4

Metal While-In-Use Cover

WIUM-1DH



7-IN-1 Configuration Inserts:

Duplex	GFCI	Toggle	1-3/8" Round	1-9/16"-1-5/8" Round	1-11/16" Round	2-1/8" Round
Duplex Adapter	GFCI Adapter	2-1/8" Adapter 1-9/16"-1-5/8" Ring Toggle Adapter	2-1/8" Adapter 1-9/16"-1-5/8" Ring 1-3/8" Ring	2-1/8" Adapter 1-9/16"-1-5/8" Ring	2-1/8" Adapter 1-11/16" Ring	2-1/8" Adapter

WIUM-1DV



31-IN-1 Configuration Inserts:

2 5/8" Round	2 1/8" Round	1 9/16"-1 5/8" Round	1 11/16" Round	1 3/8" Round	Switch
Double Duplex	Duplex GFCI	Duplex 1 5/8" Round	Duplex 1 3/8" Round	Duplex Switch	
GFCI Duplex	Double GFCI	GFCI 1 5/8" Round	GFCI 1 3/8" Round	GFCI Switch	
1 5/8" Round Duplex	1 5/8" Round GFCI	Double 1 5/8" Round	1 5/8" Round 1 3/8" Round	1 5/8" Round Switch	
1 3/8" Round Duplex	1 3/8" Round GFCI	1 3/8" Round 1 5/8" Round	Double 1 3/8" Round	1 3/8" Round Switch	
Switch Duplex	Switch GFCI	Switch 1 5/8" Round	Switch 1 3/8" Round	Double Switch	

WIUM-2SD



Features & Benefits:

- Lockable tab prevents accidental disconnects.
- Meets 2020 NEC Article 406.9 (B) Extra-duty specification
- Heavy duty commercial grade die cast Aluminum construction.
- Extra large cord opening.
- Patented building-block adapter provides flexibility in receptacle configuration
- Unique Expandable by swinging bar to up or down position

Certifications: UL 514D

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
WIUM-1DH	1-GANG	7-IN-1,MULTI-HEIGHT,HORIZONTAL MOUNTING TYPE		10	10.1
WIUM-1DV	1-GANG	7-IN-1,MULTI-HEIGHT,VERTICAL MOUNTING TYPE		10	10.3
WIUM-2SD	2-GANG	31-IN-1,MULTI-HEIGHT,VERTICAL MOUNTING TYPE		6	8.9



Weatherproof Boxes & Covers

Weatherproof Covers



Certifications: UL-514A

Features & Benefits:

- UL Listed for wet locations
- Weather seal gasket included to keep moisture out.
- Copper-free Aluminum construction.



CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	CASE LBS
1-BC	1-GANG	1-GANG WP COVER with GASKET		100	7
2-BC	2-GANG	2-GANG WP COVER with GASKET		100	12
3-BC	3-GANG	3-GANG WP COVER with GASKET		20	3

Flat Device Cover



AC-1



AC-2



AC-3



ACSW-2

Features & Benefits:

- UL listed for wet locations.
- Weather seal gasket included to keep moisture out.
- Heavy-Duty Copper-free die cast Aluminum construction.
- High corrosion resistance.
- Patented building-block adapter provides flexibility in receptacle configuration.
- Spring-loaded lid & standard locking feature



Certifications: UL 514D

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
AC-1	1-GANG	1-GANG UNIVERSAL 10-IN-1 WP COVER with GASKET		20	7.0
AC-2	2-GANG	2-GANG UNIVERSAL 16-IN-1 WP COVER with GASKET		10	4.7
AC-3	3-GANG	3-GANG UNIVERSAL 64-IN-1 WP COVER with GASKET		5	3.4
ACSW-2	2-GANG	2-GANG UNIVERSAL 4-IN-1 WP COVER with GASKET		12	4.8

Flat Device Cover



Features & Benefits:

- Copper-free aluminum die casting
- Epoxy powder coating.



Certifications: UL 514D

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
1C-DH	1-GANG	Horizontal Duplex		50	9.3

Flat Device Cover



Features & Benefits:

- Copper-free aluminum die casting
- Epoxy powder coating.



Certifications: UL 514D

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
1C-SWH	1-GANG	Heavy duty 1-Gang toggle switch cover		25	4.9
2C-SWH	2-GANG	Heavy duty 2-Gang toggle switch cover		12	4.0

Flat Device Cover



Features & Benefits:

- Copper-free aluminum die casting
- Epoxy powder coating.



Certifications: UL 514D

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
1C-PO20	1-GANG	20A power outlet, D = 1.625"		50	13.8
1C-PO40	1-GANG	40A power outlet, D = 2.125"		50	13.3

Flat Device Cover



Features & Benefits:

- Copper-free aluminum die casting
- Epoxy powder coating.



Certifications: UL 514D

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
2CL-PO50	2-GANG	One Dia. 2.125" power outlet. 20-50A, 3 or 4 wires		8	6.0
2CL-PO60	2-GANG	One Dia. 2.641" power outlet. 20-50A, 3 or 4 wires		8	5.6

Lamp Holder Covers



Features & Benefits:

- Copper-free die cast aluminum.
- Epoxy powder coating.
- Grey Finish.



Certifications: UL-1598

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
RC-1	1/2"	1 HOLE, 4" ROUND LAMPHOLDER		50	7.8
RC-3	1/2"	3 HOLES, 4" ROUND LAMPHOLDER		50	8.1

Lamp Holder Covers



Features & Benefits:

- Copper-free die cast aluminum.
- Epoxy powder coating.
- Grey Finish.



Certifications: UL-1598

CAT#	TRADE SIZE	DESCRIPTION	PACKAGE INFORMATION		
			INNER CASE	MASTER CASE	WT LBS
RE-1	1/2"	1 HOLE, RECTANGULAR LAMPHOLDER COVER		50	8.2
RE-3	1/2"	3 HOLES, RECTANGULAR LAMPHOLDER COVER		50	9.0

Single-Gang Shallow Outlet Boxes

3 HOLE



Features & Benefits:

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE KO SIZE	A LENGTH	B WIDTH	C HEIGHT	WT /100pcs	PACKAGE INFORMATION		
	IN	IN	IN	IN	LBS	INNER CASE	MASTER CASE	CASE LBS
FSB50-3	1/2"	4.61	2.83	2.01	51.6		25	12.9
FSB75-3	3/4"	4.61	2.83	2.01	52.4		25	13.1
FSB100-3	1"	4.61	2.83	2.01	60.8		25	15.2



4 HOLE



Features & Benefits:

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
FSB50-4	1/2"	4.61	2.83	2.01	56.0		25	14.0
FSB75-4	3/4"	4.61	2.83	2.01	54.4		25	13.6



5 HOLE



Features & Benefits:

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
FSB50-5	1/2"	4.61	2.83	2.01	56.4		25	14.1
FSB75-5	3/4"	4.61	2.83	2.01	53.6		25	13.4



5 HOLE

**Features & Benefits:**

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
FSB50-5X	1/2"	4.61	2.83	2.01	52.0		25	13.0
FSB75-5X	3/4"	4.61	2.83	2.01	52.0		25	13.0
FSB100-5X	1"	4.61	2.83	2.01	55.2		25	13.8



Double-Gang Shallow Outlet Boxes

3 HOLE

**Features & Benefits:**

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
TGB50-3	1/2"	4.61	4.53	2.01	73.0		10	7.3
TGB75-3	3/4"	4.61	4.53	2.01	71.0		10	7.1
TGB100-3	1"	4.61	4.53	2.01	89.0		10	8.9



4 HOLE

**Features & Benefits:**

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
TGB50-4	1/2"	4.61	4.53	2.01	75.0		10	7.5
TGB75-4	3/4"	4.61	4.53	2.01	76.0		10	7.6
TGB100-4	1"	4.61	4.53	2.01	79.0		10	7.9



5 HOLE



Features & Benefits:

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A



CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
TGB50-5	1/2"	4.61	4.53	2.01	74.0		10	7.4
TGB75-5	3/4"	4.61	4.53	2.01	76.0		10	7.6

5 HOLE



Features & Benefits:

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A



CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
TGB50-5X	1/2"	4.61	4.53	2.01	73.0		10	7.3
TGB75-5X	3/4"	4.61	4.53	2.01	73.0		10	7.3
TGB100-5X	1"	4.61	4.53	2.01	82.0		10	8.2

6 HOLE



Features & Benefits:

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A



CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
TGB50-6X	1/2"	4.61	4.53	2.01	85.0		10	8.5
TGB75-6X	3/4"	4.61	4.53	2.01	84.0		10	8.4

7 HOLE



Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
TGB50-7	1/2"	4.61	4.53	2.01	82.0	INNER CASE	MASTER CASE	WT LBS
TGB75-7	3/4"	4.61	4.53	2.01	82.0		10	8.2

**Features & Benefits:**

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

7 HOLE



Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
TGB50-7X	1/2"	4.61	4.53	2.01	76.0	INNER CASE	MASTER CASE	WT LBS
TGB75-7X	3/4"	4.61	4.53	2.01	82.0		10	8.2

**Features & Benefits:**

- UL Listed for wet locations.
- 2" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Single-Gang Deep Outlet Boxes



Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
1DB50-3	1/2"	4.61	2.83	2.62	66.5	INNER CASE	MASTER CASE	WT LBS
1DB75-3	3/4"	4.61	2.83	2.62	65.0		20	13.0
1DB100-3	1"	4.61	2.83	2.62	77.5		20	15.5

**Features & Benefits:**

- UL Listed for wet locations.
- 2.62" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Single-Gang Deep Outlet Boxes



Features & Benefits:

- UL Listed for wet locations.
- 2.62" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
1DB50-5X	1/2"	4.61	2.83	2.62	62.5		20	12.5
1DB75-5X	3/4"	4.61	2.83	2.62	61.5		20	12.3
1DB100-5X	1"	4.61	2.83	2.62	63.0		20	12.6



Double-Gang Deep Outlet Boxes



Features & Benefits:

- UL Listed for wet locations.
- 2.62" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
DTB-5	1/2"	4.61	4.53	2.62	96.0		10	9.6
DTB-75	3/4"	4.61	4.53	2.62	88.0		10	8.8
DTB-100	1"	4.61	4.53	2.62	90.0		10	9.0



Triple -Gang Deep Outlet Boxes



Features & Benefits:

- UL Listed for wet locations.
- 2.62" depth.
- 2 mounting lugs, 2 closure plugs and 1 grounding screw included.
- Copper-free die cast aluminum construction.
- Epoxy powder coating.
- Grey finish

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
3DB50-7	1/2"	6.37	4.60	2.62	146.0		5	7.3
3DB75-7	3/4"	6.37	4.60	2.62	132.0		5	6.6
3DB100-7	1"	6.37	4.60	2.62	116.0		5	5.8



Extension Rings-Blank



Features & Benefits:

- Expands cubic capacity and enables flush finish.
- Copper-free die cast aluminum.
- Grey Finish.

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
EXR-1	1-GANG	4.61	2.83	1.38	20.4		25	5.1
EXR-2	2-GANG	4.61	4.61	1.38	28.0		25	7.0



Extension Flanges



Features & Benefits:

- 4 holes
- Two flanged holes on each end.
- Copper-free die cast aluminum.
- Grey finish.

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
EXF50-4	1/2"	4.61	2.83	1.38	40.1		25	10.1
EXF75-4	3/4"	4.61	2.83	1.38	38.4		25	9.6



Extension Flanges



Features & Benefits:

- 6 holes
- Two flanged holes on each end and one on each side wall.
- Copper-free die cast aluminum.
- Grey finish.

Certifications: UL-514A

CAT#	TRADE SIZE	LENGTH INCH	WIDTH INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
						INNER CASE	MASTER CASE	WT LBS
EXF50-6	1/2"	5.24	3.46	1.15	45.2		25	11.3
EXF75-6	3/4"	5.24	3.46	1.15	39.6		25	9.9



Round Boxes



Features & Benefits:

- UL Listed for wet locations.
- Includes four (4) closure plugs, and grounding screws.
- Copper-free Aluminum construction.
- Grey Finish

Certifications: UL-514A

CAT#	TRADE SIZE	A	B	WT /100pcs LBS	PACKAGE INFORMATION		
		DIAMETER IN	HEIGHT IN		INNER CASE	MASTER CASE	CASE LBS
BRD-4N	1/2"	4.21	1.61	23.8		24	10
RB-7N	3/4"	4.21	1.61	23.3		24	10



Round Extension Boxes



Features & Benefits:

- 4 threaded holes
- Copper-free die cast aluminum.
- Grey finish.

Certifications: UL-514A

CAT#	TRADE SIZE	DIAMETER INCH	HEIGHT INCH	WT /100pcs LBS	PACKAGE INFORMATION		
					INNER CASE	MASTER CASE	WT LBS
EXR50-4	1/2"	4.25	1.61	39.0		10	3.9
EXR75-4	3/4"	4.25	1.61	36.0		10	3.6



Closure Plugs



Features & Benefits:

- UL listed for wet locations.
- Safely seal off unused hubs in metallic outlet boxes.
- Cast aluminum with powder coat finish or plastic.

Certifications: UL-514B

CAT#	TRADE SIZE	MATERIAL	WT /100pcs LBS	PACKAGE INFORMATION		
				INNER CASE	MASTER CASE	WT LBS
PL-50A	1/2"	CAST ALUMINUM	0.8	100	1000	7.6
PL-75A	3/4"	CAST ALUMINUM	1.2	50	500	5.8
PL-100A	1"	CAST ALUMINUM	2.2	25	250	5.5
PL-50P	1/2"	PLASTIC	0.4	100	1000	4.3
PL-75P	3/4"	PLASTIC	0.7	50	500	3.3
PL-100P	1"	PLASTIC	0.5	25	250	2.7





Clamp on Type



Features & Benefits:

- Die-cast oval service entrance caps are used as a connecting point in an overhead service entrance cable.
- Water Resistant to protect conductors.
- Clamp-on style allows connection to non-threaded mast.
- For use in connecting SEU cable to an overhead service entrance.



Certifications: UL-514B

CAT#	WIRE SIZE	PACKAGE INFORMATION		
		INNER CASE	MASTER CASE	WT LBS
SEC-60	3/8 - 3/1		20	6.4
SEC-62A	1/0 - 4/0		10	11

Service Entrance Caps

Clamp on Type




Features & Benefits:

- Clamp type weather resistant aluminum entrance caps for threaded or non-threaded rigid conduit, IMC or EMT service mast..
- Cooper-free aluminum construction.



Certifications: UL-514B

CAT#	TRADE SIZE	INSIDE HOLE SIZE IN	# HOLES	A B C			PACKAGE INFORMATION		
				DEPTH IN	LENGTH IN	WIDTH IN	INNER CASE	MASTER CASE	WT LBS
CEC-50	1/2"	19/64	4	2.93	2.62	2.00	10	50	15
CEC-75	3/4"	3/8	2	3.25	2.75	2.37	5	50	8
		13/32	3						
CEC-100	1"	7/16	2	3.50	3.25	2.62	5	25	9
		1/2	3						
CEC-125	1 1/4"	27/64	2	4.50	3.25	3.00	5	25	12
		5/8	3						
CEC-150	1 1/2"	19/32	2	5.00	4.75	3.31	3	15	11
		7/16	1						
CEC-200	2"	3/4	2	6.75	6.00	4.62		5	5
		1	3						
CEC-250	2 1/2"	7/8	3	10.5	7.5	6		1	4
		1 5/16	3						
CEC-300N	3"	7/8	3	11.5	9	8		1	5
		1 5/16	3						
CEC-350	3 1/2"	1 1/8	4	12	9	8		1	5
		1 3/4	3						
CEC-400	4"	1 1/8	4	12	9	8		1	6
		1 3/4	3						

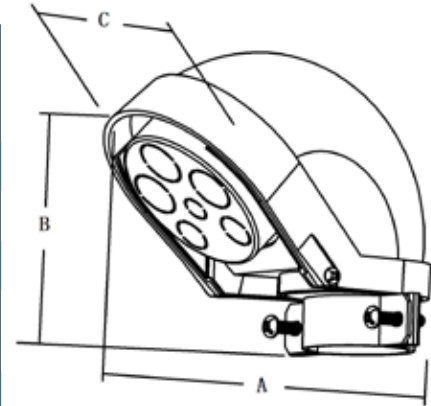


Roof Flashing



Features & Benefits:

- For plastic, Malleable iron or galvanized pipe.
- Fits flats to 40°
- Galvanized steel with neoprene seal.

CAT#	TRADE SIZE	Dimensions (inch)			PACKAGE INFORMATION		
		A	B	C	INNER CASE	MASTER CASE	WT LBS
RF-125S	1 1/4"	8.7	12.52	2.76		25	18.7
RF-150S	1 1/2"	8.7	12.52	2.76		25	18.7
RF-200S	2"	10.75	14.53	3.11		25	29.3
RF-250S	2 1/2"	10.75	14.53	3.11		25	28.8




Wedge Grip Clamps



Features & Benefits:

- For reducing strain and sagging of overhead type ACSR service entrance cables.
- Aluminum body with stainless steel bail

CAT#	ACSR WIRE SIZE	Dimensions (inch)		PACKAGE INFORMATION		
		A	B	INNER CASE	MASTER CASE	WT LBS
WGC-1	6 ACSR-2 ACSR	5.94	0.85		50	7.0
WGC-2	4 ACSR-1/0 ACSR	7.21	1.04		25	6.2
WGC-3	2/0 ACSR-4/0 ACSR	7.21	1.22		25	6.2

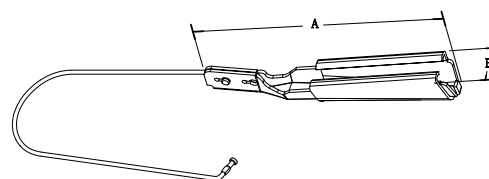

Service Entrance Elbows-SLB




Features & Benefits:

- Provides easy access for service.
- Includes cover and gasket.
- Copper-free die cast aluminum construction.
- Epoxy powder coating finish provides additional corrosion resistance in a good appearance



Certifications: UL-514B

CAT#	TRADE SIZE	Dimensions (inch)			PACKAGE INFORMATION		
		A	B	C	INNER CASE	MASTER CASE	WT LBS
SLB-50	1/2"	3.26	1.37	1.59	10	50	10.2
SLB-75	3/4"	3.65	1.7	1.88	10	50	15.0
SLB-100	1"	4.27	1.92	2.09	5	25	10.5
SLB-125	1 1/4"	5.51	2.39	2.62	2	10	7.3
SLB-150	1 1/2"	6.22	2.55	2.7	1	5	5.0
SLB-200	2"	6.69	3.12	3.06	1	5	6.2

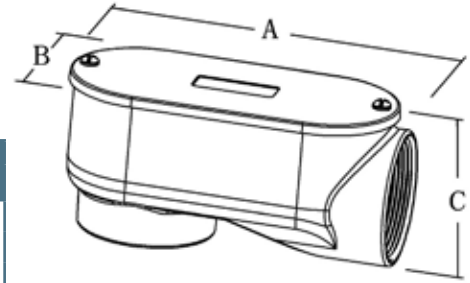

Universal Snap-in Bushing




Features & Benefits:

- Used to protect wires from abrasion when entering or leaving a metal stud.
- Polypropylene



Certifications: UL-514B

CAT#	Dimensions (inch)				PACKAGE INFORMATION		
	A	B	C	D	INNER CASE	MASTER CASE	WT LBS
USB	4.61	0.56	1.35	2.27		1000	17

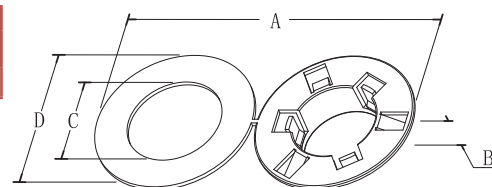

Anti-Short Bushing




Features & Benefits:

- Inserted into the end of AC or FMC to protect the conductors from the sharp edges of the raceway where cut.
- Polyethylene



Certifications: UL-512B

CAT#	TRADE SIZE	Dimensions (inch)		PACKAGE INFORMATION		
		A	B	INNER CASE	MASTER CASE	WT LBS
ASB-0	5/16"	0.568	0.652	25	2500	3.02
ASB-1	3/8"	0.625	0.655	25	2500	3.48
ASB-2	7/16"	0.605	0.84	25	1250	3.57
ASB-3	1/2"	0.675	1.02	25	1250	3.96
ASB-4	3/4"	0.815	1.25	25	1250	3.96

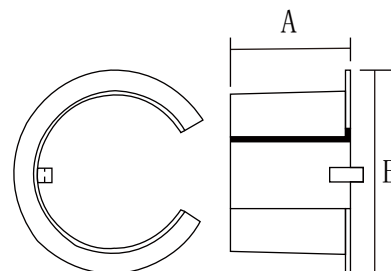

Aluminum lay-in lugs




Features & Benefits:

- Used to bond wires and surfaces in grounding
- Suitable use with aluminum or copper wire conductors
- Body: aluminum
- Screw: steel, zinc plated



Certifications: UL-467

CAT#	WIRE RANGE SIZE	Dimensions (inch)				PACKAGE INFORMATION		
		A	B	C	D	INNER CASE	MASTER CASE	WT LBS
ALI-4A	4-14	0.50	1.07	0.26	0.49	25	250	6.4
ALI-1/0A	1/0-14	0.50	1.16	0.26	0.58		100	6.0
ALI-250A	250 MCM-6	0.62	1.47	0.26	0.83		50	9.4



Aluminum thru-in Lug




Features & Benefits:

- Used to bond wires and surfaces in grounding
- Suitable use with aluminum or copper wire conductors
- Body: aluminum
- Screw: steel, zinc plated



Certifications: UL-467

CAT#	WIRE RANGE SIZE	Dimensions (inch)				PACKAGE INFORMATION		
		A	B	C	D	INNER CASE	MASTER CASE	WT LBS
TL-4A	4-14	0.50	1.07	0.26	0.49	100	1000	14.4
TL-2A	2-14	0.50	1.16	0.26	0.58	100	1000	13.6
TL-1/0A	1/0-14	0.62	1.47	0.26	0.83		50	2.1
TL-2/0A	2/0-14	0.62	1.47	0.26	0.83		50	2.1

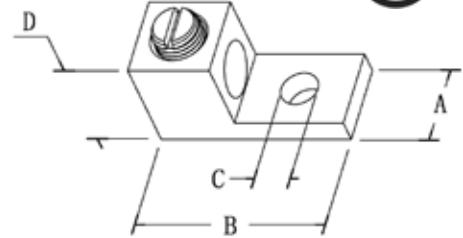

Double Thru-in Lug




Features & Benefits:

- Used to bond wires and surfaces in grounding
- Suitable use with aluminum or copper wire conductors
- Body: aluminum
- Screw: steel, zinc plated



Certifications: UL-467

CAT#	WIRE RANGE SIZE	Dimensions (inch)			PACKAGE INFORMATION		
		A	B	C	INNER CASE	MASTER CASE	WT LBS
DTL-1/0A	1/0-14	1.48	1.13	0.78	10	100	7.4
DTL-2/0A	2/0-14	1.48	1.25	0.78	10	100	7.8
DTL-250A	250MCM-6	2.56	1.63	1.02	10	100	15.7



INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
012CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
012EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
012EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
012EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
012EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
012EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
012GRN150	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN250	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
012RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
012RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
012RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
012RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
012RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
012RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
034CGRN	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	13
034EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
034EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
034EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
034EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
034EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
034GRN150	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN250	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
034RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
034RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
034RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
034RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
034RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
034RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
1-BC	Weatherproof	WEATHERPROOF COVER	THIRTEEN	113
1C-DH	Weatherproof	DEVICE COVER	THIRTEEN	115
1C-PO20	Weatherproof	DEVICE COVER	THIRTEEN	114
1C-PO40	Weatherproof	DEVICE COVER	THIRTEEN	114

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
1C-SWH	Weatherproof	DEVICE COVER	THIRTEEN	114
1DB50-3	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	119
1DB50-5X	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	120
1DB75-3	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	119
1DB75-5X	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	120
1DB100-3	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	119
1DB100-5X	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	120
100CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
100EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
100EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
100EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
100EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
100EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
100GRN200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN250	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
100RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
100RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
100RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
100RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
100RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
100RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
170	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
170G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
1161	Rigid Fittings	REDUCING BUSHING	FOUR	25
1162	Rigid Fittings	REDUCING BUSHING	FOUR	25
1163	Rigid Fittings	REDUCING BUSHING	FOUR	25
1164	Rigid Fittings	REDUCING BUSHING	FOUR	25
1165	Rigid Fittings	REDUCING BUSHING	FOUR	25
1166	Rigid Fittings	REDUCING BUSHING	FOUR	25
1167	Rigid Fittings	REDUCING BUSHING	FOUR	25
1168	Rigid Fittings	REDUCING BUSHING	FOUR	25
1169	Rigid Fittings	REDUCING BUSHING	FOUR	25
1170	Rigid Fittings	REDUCING BUSHING	FOUR	25
1171	Rigid Fittings	REDUCING BUSHING	FOUR	25
1172	Rigid Fittings	REDUCING BUSHING	FOUR	25
1173	Rigid Fittings	REDUCING BUSHING	FOUR	25
1174	Rigid Fittings	REDUCING BUSHING	FOUR	25
1175	Rigid Fittings	REDUCING BUSHING	FOUR	25
125CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
125EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
125EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
125EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
125EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
125EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
125GRN200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN250	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
125RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
125RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
125RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
125RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
125RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
125RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
150CGRN	Elbows, Nipples & Couplings	EMT ELBOW	TWO	13
150EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
150EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
150EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
150EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
150EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
150GRN200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN250	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
150RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
150RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
150RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
150RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
150RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
150RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
2-BC	Weatherproof	WEATHERPROOF COVER	THIRTEEN	113
2C-SWH	Weatherproof	DEVICE COVER	THIRTEEN	114
2CL-PO50	Weatherproof	DEVICE COVER	THIRTEEN	115
2CL-PO60	Weatherproof	DEVICE COVER	THIRTEEN	115
200CGRN	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	13
200EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
200EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
200EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
200EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
200EE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	6
200GRN250	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
200GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN700	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	12
200RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
200RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
200RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
200RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
200RE45X24	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
200RE45X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
200RE45X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
200RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
200RE90X24	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
200RE90X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
200RE90X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
200RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
230S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
231S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
232S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
233S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
234S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
235S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
236S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
237S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
238S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
239S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
240S	Liquidtight	LIQUIDTIGHT FITTING	SIX	59
250CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
250EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
250EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
250EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
250EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
250EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
250GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
250RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
250RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
250RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
250RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
250RE45X24Elbows	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
250RE45X36Elbows	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
250RE45X48Elbows	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
250RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
250RE90X24Elbows	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
250RE90X36Elbows	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
250RE90X48Elbows	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	10
250RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
270	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
270G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
3-BC	Weatherproof	DEVICE COVER	THIRTEEN	113
3DB50-7	Weatherproof	WEATHERPROOF TRIPLE GANG	THIRTEEN	120
3DB75-7	Weatherproof	WEATHERPROOF TRIPLE GANG	THIRTEEN	120
3DB100-7	Weatherproof	WEATHERPROOF TRIPLE GANG	THIRTEEN	120
300CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
300EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
300EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
300EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
300EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
300EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
300GRN300	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN350	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
300RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
300RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
300RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
300RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
300RE45X24	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
300RE45X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
300RE45X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
300RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
300RE90X24	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
300RE90X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
300RE90X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
300RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
331M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
332M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
333M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
334M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
335M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
336M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
337M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
338M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
339M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
340M	Rigid Fittings	GROUNDING BUSHING	FOUR	27
340AM	Rigid Fittings	GROUNDING BUSHING	FOUR	27
340BM	Rigid Fittings	GROUNDING BUSHING	FOUR	27
350CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
350EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
350EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
350EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
350EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
350EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
350GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
350GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
350GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
350GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
350GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
350GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
350RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
350RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
350RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
350RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
350RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
350RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
370	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
370G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
400CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
400EE15	Elbows, Nipples & Couplings	EMT ELBOW	TWO	7
400EE30	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
400EE45	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
400EE90	Elbows, Nipples & Couplings	EMT ELBOW	TWO	5
400EE225	Elbows, Nipples & Couplings	EMT ELBOW	TWO	6
400GRN400	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
400GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
400GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
400GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
400GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
400GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
400RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
400RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
400RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
400RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
400RE45X24	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
400RE45X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
400RE45X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
400RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
400RE90X24	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
400RE90X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
400RE90X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
400RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
470	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
470G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
470S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
471S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
472S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
473S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
474S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
475S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
476S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
477S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
478S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
479S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
480S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	59
490S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
491S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
492S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
493S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
494S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
495S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
496S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
497S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
498S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
499S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
500S	Liquidtight	MALLEABLE IRON CONNECTOR	SIX	60
500CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
500GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
500GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
500GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
500GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
500GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
500RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
500RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
500RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
500RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
500RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
500RE90X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
500RE90X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
500RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
570	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
570G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
600CGRN	Elbows, Nipples & Couplings	CLOSE NIPPLE	TWO	13
600GRN500	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
600GRN600	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
600GRN800	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
600GRN1000	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
600GRN1200	Elbows, Nipples & Couplings	RIGID NIPPLE	TWO	13
600RC	Elbows, Nipples & Couplings	RIGID COUPLING	TWO	14
600RE15	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
600RE30	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
600RE45	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	8
600RE90	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	7
600RE90X36	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
600RE90X48	Elbows, Nipples & Couplings	RIGID SPECIAL RADIUS ELBOW	TWO	11
600RE225	Elbows, Nipples & Couplings	RIGID ELBOW	TWO	9
670	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
670G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
870	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
870G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
970	Conduit Bodies	CONDUIT BODY COVER	FIVE	56

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
970G	Conduit Bodies	CONDUIT BODY COVER	FIVE	56
AC-1	Weatherproof	DEVICE COVER	THIRTEEN	113
AC-2	Weatherproof	DEVICE COVER	THIRTEEN	113
AC-3	Weatherproof	DEVICE COVER	THIRTEEN	113
ACD49	Liquidtight	AC DISCONNECT	SIX	61
ACSW-2	Weatherproof	DEVICE COVER	THIRTEEN	113
ALI-4A	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ALI-1/0A	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ALI-250A	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ASB-0	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ASB-1	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ASB-2	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ASB-3	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
ASB-4	Accessories and Grounding	LAY-IN LUG	FIFTEEN	128
B4450-50	Steel Boxes & Covers	4" SQUARE DRAWN BOX	NINE	83
B4451-50	Steel Boxes & Covers	4" SQUARE DRAWN BOX	NINE	83
B4452-50	Steel Boxes & Covers	4" SQUARE DRAWN BOX	NINE	83
B4453-50	Steel Boxes & Covers	4" SQUARE DRAWN BOX	NINE	83
B4454-50	Steel Boxes & Covers	4" SQUARE DRAWN BOX	NINE	83
B7451-25	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	82
B7452-25	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	82
B8451-20	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	82
B8452-50	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	84
B8453-25	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	82
B8454-25	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	82
B8456-25	Steel Boxes & Covers	4 11/16" SQUARE WELDED BOX	NINE	82
B8544-25	Steel Boxes & Covers	4" SQUARE WELDED BOX	NINE	84
B8545-25	Steel Boxes & Covers	4" SQUARE WELDED BOX	NINE	84
B8546-25	Steel Boxes & Covers	4" SQUARE WELDED BOX	NINE	84
B8548-25	Steel Boxes & Covers	4" SQUARE WELDED BOX	NINE	84
B8549-25	Steel Boxes & Covers	4" SQUARE WELDED BOX	NINE	84
BB-50	Rigid Fittings	BOX SPACER	FOUR	36
BB-75	Rigid Fittings	BOX SPACER	FOUR	36
BC-100M	Hanging & Support	BEAM CLAMPS	EIGHT	72
BC-200M	Hanging & Support	BEAM CLAMPS	EIGHT	72
BC-250M	Hanging & Support	BEAM CLAMPS	EIGHT	72
BL-16	BX, Flex & MC Fittings	SINGLE-SCREW SADDLE CONNECTOR	TEN	100
BL-17	BX, Flex & MC Fittings	SINGLE-SCREW SADDLE CONNECTOR	TEN	100
BL-18	BX, Flex & MC Fittings	SINGLE-SCREW SADDLE CONNECTOR	TEN	100
BL-19	BX, Flex & MC Fittings	SINGLE-SCREW SADDLE CONNECTOR	TEN	100
BLN-50S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-75S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-100S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-125S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-150S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-200S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-250S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-300S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-350S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-400S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BLN-500S	Rigid Fittings	BONDING LOCKNUT	FOUR	36

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
BLN-600S	Rigid Fittings	BONDING LOCKNUT	FOUR	36
BRD-4N	Weatherproof	WEATHERPROOF ROUND BOX	THIRTEEN	122
BX-38	BX, Flex & MC Fittings	BX CONNECTOR	TEN	98
C17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C77	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C87	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C97	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C107	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
C1152-100	Steel Boxes & Covers	RECEPTACLE COVER	NINE	78
C1153-100	Steel Boxes & Covers	RECEPTACLE COVER	NINE	78
C1156-100	Steel Boxes & Covers	RECEPTACLE COVER	NINE	78
C2237-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2238-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2239-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2240-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2242-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2243-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2244-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2245-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2246-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2247-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2249-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2250-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C2251-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C3451-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C3452-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C3454-50	Steel Boxes & Covers	INDUSTRIAL COVERS	NINE	88
C4450-50	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4452-50	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4453-50	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4454-50	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4455-50	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4456-25	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4457-25	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4458-25	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C4459-25	Steel Boxes & Covers	4" SQUARE SINGLE GANG DEVICE COVERS	NINE	86
C6500-50	Steel Boxes & Covers	4" SQUARE TO ROUND DEVICE RING	NINE	87
C6501-50	Steel Boxes & Covers	4" SQUARE TO ROUND DEVICE RING	NINE	87
C7510-50	Steel Boxes & Covers	4 11/16" BOX COVERS	NINE	82
C7511-50	Steel Boxes & Covers	4 11/16" BOX COVERS	NINE	82
C7513-50	Steel Boxes & Covers	4 11/16" BOX COVERS	NINE	82
C7516-50	Steel Boxes & Covers	4" SQUARE BOX COVERS	NINE	85
C7517-50	Steel Boxes & Covers	4" SQUARE BOX COVERS	NINE	85
C8451-50	Steel Boxes & Covers	4" SQUARE BOX COVERS	NINE	80
C8452-50	Steel Boxes & Covers	4" SQUARE BOX COVERS	NINE	80
C-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
C-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
C-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
C-250SC	Conduit Bodies	TYPE C RIGID CONDUIT BODY	FIVE	42
C-300SC	Conduit Bodies	TYPE C RIGID CONDUIT BODY	FIVE	42
C-350SC	Conduit Bodies	TYPE C RIGID CONDUIT BODY	FIVE	42
C-400SC	Conduit Bodies	TYPE C RIGID CONDUIT BODY	FIVE	42
CB-50P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-75P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-100P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-125P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-150P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-200P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-250P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-300P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-350P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CB-400P	Rigid Fittings	RIGID INSULATING PLASTIC BUSHING	FOUR	28
CBI-50	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-75	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-100	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-125	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-150	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-200	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-250	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-300	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-350	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CBI-400	Rigid Fittings	RIGID INSULATING BUSHING	FOUR	28
CC-50RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-50SC	Conduit Bodies	C TYPE COMBO CONDUIT BODY	FIVE	43
CC-75RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-75SC	Conduit Bodies	C TYPE COMBO CONDUIT BODY	FIVE	43
CC-100RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-100SC	Conduit Bodies	C TYPE COMBO CONDUIT BODY	FIVE	43
CC-125RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-125SC	Conduit Bodies	C TYPE COMBO CONDUIT BODY	FIVE	43
CC-150RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-150SC	Conduit Bodies	C TYPE COMBO CONDUIT BODY	FIVE	43
CC-200RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-200SC	Conduit Bodies	C TYPE COMBO CONDUIT BODY	FIVE	43
CC-250RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-300RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-350RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-400RTS1	EMT Fittings	RAINTIGHT COMPRESSION CONNECTOR	THREE	17
CC-50S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-75S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-100S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-125S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-150S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-200S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-250S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-300S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CC-350S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
CC-400S1	EMT Fittings	EMT COMPRESSION CONNECTOR	THREE	16
CCI-50RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-75RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-100RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-125RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-150RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-200RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-250RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-300RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-350RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-400RTS1	EMT Fittings	EMT INS RT COMPRESSION CONNECTOR	THREE	17
CCI-50S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-75S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-100S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-125S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-150S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-200S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-250S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-300S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-350S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CCI-400S1	EMT Fittings	EMT INSULATED COMPRESSION CONN	THREE	16
CEC-50	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-75	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-100	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-125	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-150	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-200	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-250	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-300N	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-350	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CEC-400	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	124
CER-50RTS	Transition Fittings	RAIN-TIGHT COMBINATION COUPLING	SEVEN	67
CER-75RTS	Transition Fittings	RAIN-TIGHT COMBINATION COUPLING	SEVEN	67
CER-100RTS	Transition Fittings	RAIN-TIGHT COMBINATION COUPLING	SEVEN	67
CER-125RTS	Transition Fittings	RAIN-TIGHT COMBINATION COUPLING	SEVEN	67
CER-150RTS	Transition Fittings	RAIN-TIGHT COMBINATION COUPLING	SEVEN	67
CER-200RTS	Transition Fittings	RAIN-TIGHT COMBINATION COUPLING	SEVEN	67
CKF-50	Transition Fittings	EMT COMBINATION COUPLING	SEVEN	63
CKF-75	Transition Fittings	EMT COMBINATION COUPLING	SEVEN	63
CKF-100	Transition Fittings	EMT COMBINATION COUPLING	SEVEN	63
CK-50RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-50S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-75RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-75S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-100RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-100S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-125RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-125S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-150RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-150S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-200RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
CK-200S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-250RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-250S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-300RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-300S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-350RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-350S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CK-400RTS1	EMT Fittings	EMT RT COMPRESSION COUPLING	THREE	15
CK-400S1	EMT Fittings	EMT COMPRESSION COUPLING	THREE	15
CN-50	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-50-L	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-75	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-75-L	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-100	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-100-L	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-125	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-150	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-200	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-250	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-300	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-350	Rigid Fittings	CHASE NIPPLE	FOUR	24
CN-400	Rigid Fittings	CHASE NIPPLE	FOUR	24
CR-125MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
CR-150MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
CR-200MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
CR-250MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
CR-300MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
CR-350MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
CR-400MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
D4451-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	83
D4452-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	83
D4454-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	83
D4455-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	83
D4456-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	83
D6500-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	84
D6541-25	Steel Boxes & Covers	4" SQUARE DRAWN DEEP BOX	NINE	84
DC90-38	BX, Flex & MC Fittings	TWO SCREW DUPLEX BX 90° CONN	TEN	103
DC-38	BX, Flex & MC Fittings	TWO SCREW DUPLEX BX CONN	TEN	103
DCA-38	BX, Flex & MC Fittings	SINGLE SCREW DUPLEX BX CONN	TEN	102
DHLC-38P	NM Cable Fittings	NM CONNECTOR	ELEVEN	109
DMC-38S	BX, Flex & MC Fittings	SINGLE SCREW DUPLEX BX CONN	TEN	102
DTB-5	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	120
DTB-75	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	120
DTB-100	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	120
DTL-1/0A	Accessories and Grounding	DOUBLE THRU-IN LUG	FIFTEEN	128
DTL-2/0A	Accessories and Grounding	DOUBLE THRU-IN LUG	FIFTEEN	128
DTL-250A	Accessories and Grounding	DOUBLE THRU-IN LUG	FIFTEEN	128
E4511-50	Steel Boxes & Covers	4" SQUARE BOX EXTENSION	NINE	86
E4512-50	Steel Boxes & Covers	4" SQUARE BOX EXTENSION	NINE	86
EDG-50M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EDG-75M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
EDG-100M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EDG-125M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EDG-150M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EDG-200M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EDG-250M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EDG-300M-HDG	Hanging & Support	EDGE CLAMP	EIGHT	71
EMT50	Conduit	EMT CONDUIT	ONE	1
EMT75	Conduit	EMT CONDUIT	ONE	1
EMT100	Conduit	EMT CONDUIT	ONE	1
EMT125	Conduit	EMT CONDUIT	ONE	1
EMT150	Conduit	EMT CONDUIT	ONE	1
EMT200	Conduit	EMT CONDUIT	ONE	1
EMT250	Conduit	EMT CONDUIT	ONE	1
EMT300	Conduit	EMT CONDUIT	ONE	1
EMT350	Conduit	EMT CONDUIT	ONE	1
EMT400	Conduit	EMT CONDUIT	ONE	1
EMTLT-50S	Transition Fittings	LIQUID-TIGHT COMBINATION COUPLING	SEVEN	67
EMTLT-75S	Transition Fittings	LIQUID-TIGHT COMBINATION COUPLING	SEVEN	67
EMTLT-100S	Transition Fittings	LIQUID-TIGHT COMBINATION COUPLING	SEVEN	67
EMTLT-125S	Transition Fittings	LIQUID-TIGHT COMBINATION COUPLING	SEVEN	67
EMTLT-150S	Transition Fittings	LIQUID-TIGHT COMBINATION COUPLING	SEVEN	67
EMTLT-200S	Transition Fittings	LIQUID-TIGHT COMBINATION COUPLING	SEVEN	67
EXR-1	Weatherproof	SINGLE GANG EXTENSION RING	THIRTEEN	121
EXR-2	Weatherproof	DOUBLE GANG EXTENSION RING	THIRTEEN	121
EXF50-4	Weatherproof	SINGLE GANG EXTENSION FLANGE	THIRTEEN	121
EXF50-6	Weatherproof	SINGLE GANG EXTENSION FLANGE	THIRTEEN	121
EXF75-4	Weatherproof	SINGLE GANG EXTENSION FLANGE	THIRTEEN	121
EXF75-6	Weatherproof	SINGLE GANG EXTENSION FLANGE	THIRTEEN	121
EXR50-4	Weatherproof	ROUND EXTENSION BOX	THIRTEEN	122
EXR75-4	Weatherproof	ROUND EXTENSION BOX	THIRTEEN	122
FSB50-3	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB50-4	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB50-5	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB50-5X	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	117
FSB75-3	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB75-4	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB75-5	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB75-5X	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	117
FSB100-3	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	116
FSB100-5X	Weatherproof	WEATHERPROOF SINGLE GANG	THIRTEEN	117
FSC-38	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSC-50	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSC-75	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSC-100	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSC-125	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSC-150	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSC-200	BX, Flex & MC Fittings	FMC CONNECTOR	TEN	97
FSCI-38	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97
FSCI-50	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97
FSCI-75	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97
FSCI-100	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
FSCI-125	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97
FSCI-150	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97
FSCI-200	BX, Flex & MC Fittings	FMC INSULATED CONNECTOR	TEN	97
FSK-50	BX, Flex & MC Fittings	FMC COUPLING	TEN	97
FSK-75	BX, Flex & MC Fittings	FMC COUPLING	TEN	97
G2450-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G2451-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G2453-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G3450-25	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G3451-25	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G3452-25	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G3454-25	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G3455-25	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G4451-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G4452-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G4453-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G4454-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G4455-50	Steel Boxes & Covers	4" DRAWN OCTAGON BOX	NINE	79
G4456-25	Steel Boxes & Covers	4" DRAWN DEEP OCTAGON BOX	NINE	80
G4457-25	Steel Boxes & Covers	4" DRAWN DEEP OCTAGON BOX	NINE	80
G4458-25	Steel Boxes & Covers	4" DRAWN DEEP OCTAGON BOX	NINE	80
GB-50	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-75	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-100	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-125-14	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-150-14	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-200-14	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-250	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-300	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-350	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GB-400	Rigid Fittings	GROUNDING BUSHINGS	FOUR	27
GBADR3	Steel Boxes & Covers	MASONRY - ADJUSTABLE DEVICE RING	NINE	91
GBADR4	Steel Boxes & Covers	MASONRY - ADJUSTABLE DEVICE RING	NINE	91
GBADR5	Steel Boxes & Covers	MASONRY - ADJUSTABLE DEVICE RING	NINE	91
GBDC12	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GBDC13	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GBDC14	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GBDC15	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GBDC16	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GBDC23	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GBDC24	Steel Boxes & Covers	MASONRY - DEVICE RINGS	NINE	91
GC-50/100	Hanging & Support	GROUNDING CLAMP	EIGHT	72
GRC50	Conduit	RIGID CONDUIT	ONE	3
GRC75	Conduit	RIGID CONDUIT	ONE	3
GRC100	Conduit	RIGID CONDUIT	ONE	3
GRC125	Conduit	RIGID CONDUIT	ONE	3
GRC150	Conduit	RIGID CONDUIT	ONE	3
GRC200	Conduit	RIGID CONDUIT	ONE	3
GRC250	Conduit	RIGID CONDUIT	ONE	3
GRC300	Conduit	RIGID CONDUIT	ONE	3
GRC350	Conduit	RIGID CONDUIT	ONE	3

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
GRC400	Conduit	RIGID CONDUIT	ONE	3
GRC500	Conduit	RIGID CONDUIT	ONE	3
GRC600	Conduit	RIGID CONDUIT	ONE	3
H4450-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4451-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4452-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4453-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4454-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4456-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4457-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX EXTENSION	NINE	78
H4467-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	78
H4468-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	78
H4470-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
H4471-50	Steel Boxes & Covers	4X2" DRAWN HANDY BOX	NINE	77
HF138	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF112	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF112R	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF134	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF134R	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF11	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF11R	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF114	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF1112	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HF12	Liquidtight	TOP-FLEX 1 NON-METALLIC TUBING	SIX	61
HLC-38P	NM Cable Fittings	NM CONNECTOR	ELEVEN	109
HLC-75P	NM Cable Fittings	NM CONNECTOR	ELEVEN	109
IMC50	Conduit	IMC CONDUIT	ONE	2
IMC75	Conduit	IMC CONDUIT	ONE	2
IMC100	Conduit	IMC CONDUIT	ONE	2
IMC125	Conduit	IMC CONDUIT	ONE	2
IMC150	Conduit	IMC CONDUIT	ONE	2
IMC200	Conduit	IMC CONDUIT	ONE	2
IMC250	Conduit	IMC CONDUIT	ONE	2
IMC300	Conduit	IMC CONDUIT	ONE	2
IMC350	Conduit	IMC CONDUIT	ONE	2
IMC400	Conduit	IMC CONDUIT	ONE	2
KB-50M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-75M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-100M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-125M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-150M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-200M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-250M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-300M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-350M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-400M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-500M	Rigid Fittings	CLAMP BACK	FOUR	40
KB-600M	Rigid Fittings	CLAMP BACK	FOUR	40
KRA-50M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-75M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-100M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
KRA-125M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-150M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-200M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-250M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-300M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-350M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KRA-400M-HDG	Hanging & Support	RIGHT ANGLE CLAMP	EIGHT	70
KS-50S	Hanging & Support	KNOCKOUT SEALS	EIGHT	73
KS-75S	Hanging & Support	KNOCKOUT SEALS	EIGHT	73
KS-100S	Hanging & Support	KNOCKOUT SEALS	EIGHT	73
KS-125S	Hanging & Support	KNOCKOUT SEALS	EIGHT	73
KS-150S	Hanging & Support	KNOCKOUT SEALS	EIGHT	73
KS-200S	Hanging & Support	KNOCKOUT SEALS	EIGHT	73
LB17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB77	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB87	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB97	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB107	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	52
LB-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LB-50SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LB-75SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LB-100SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-125SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-150SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-200SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-250SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-300SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-350SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	41
LB-400SC	Conduit Bodies	LB TYPE CONDUIT BODIES	FIVE	42
LBC-50SC	Conduit Bodies	LB TYPE COMBO CONDUIT BODIES	FIVE	42
LBC-75SC	Conduit Bodies	LB TYPE COMBO CONDUIT BODIES	FIVE	42
LBC-100SC	Conduit Bodies	LB TYPE COMBO CONDUIT BODIES	FIVE	42
LBC-125SC	Conduit Bodies	LB TYPE COMBO CONDUIT BODIES	FIVE	42
LBC-150SC	Conduit Bodies	LB TYPE COMBO CONDUIT BODIES	FIVE	42
LBC-200SC	Conduit Bodies	LB TYPE COMBO CONDUIT BODIES	FIVE	42
LBE-50SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-75SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-100SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-125SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-150SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-200SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-250SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-300SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBE-350SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
LBE-400SC	Conduit Bodies	LB TYPE EMT CONDUIT BODIES	FIVE	41
LBR-125MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LBR-150MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LBR-200MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LBR-250MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LBR-300MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LBR-350MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LBR-400MSSC*	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	48
LL17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL77	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL87	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL97	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL107	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
LL-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-50SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-75SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-100SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-125MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-125SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-150MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-150SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-200MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-200SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-250MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-250SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-300MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-300SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-350MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-350SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LL-400MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LL-400SC	Conduit Bodies	LL TYPE RIGID CONDUIT BODIES	FIVE	43
LLC-50SC	Conduit Bodies	LL TYPE COMBO CONDUIT BODIES	FIVE	44
LLC-75SC	Conduit Bodies	LL TYPE COMBO CONDUIT BODIES	FIVE	44
LLC-100SC	Conduit Bodies	LL TYPE COMBO CONDUIT BODIES	FIVE	44
LLC-125SC	Conduit Bodies	LL TYPE COMBO CONDUIT BODIES	FIVE	44
LLC-150SC	Conduit Bodies	LL TYPE COMBO CONDUIT BODIES	FIVE	44
LLC-200SC	Conduit Bodies	LL TYPE COMBO CONDUIT BODIES	FIVE	44
LN-50S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-50S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-75S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-75S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-100S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-100S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-125S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
LN-125S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-150S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-150S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-200S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-200S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-250S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-250S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-300S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-300S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-350S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-350S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-400S	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-400S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-500S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LN-600S-NUL	Rigid Fittings	RIGID LOCKNUTS	FOUR	37
LR17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR77	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR87	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR97	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR107	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
LR-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-50SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-75SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-100SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-125MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-125SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-150MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-150SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-200MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-200SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-250MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-250SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-300MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-300SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-350MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-350SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LR-400MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	49
LR-400SC	Conduit Bodies	LR TYPE RIGID CONDUIT BODIES	FIVE	44
LRC-50SC	Conduit Bodies	LR TYPE COMBO CONDUIT BODIES	FIVE	45
LRC-75SC	Conduit Bodies	LR TYPE COMBO CONDUIT BODIES	FIVE	45
LRC-100SC	Conduit Bodies	LR TYPE COMBO CONDUIT BODIES	FIVE	45
LRC-125SC	Conduit Bodies	LR TYPE COMBO CONDUIT BODIES	FIVE	45
LRC-150SC	Conduit Bodies	LR TYPE COMBO CONDUIT BODIES	FIVE	45
LRC-200SC	Conduit Bodies	LR TYPE COMBO CONDUIT BODIES	FIVE	45

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
LT90-38	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-50	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-75	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-100	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-125	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-150	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-200	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-250	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-300	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-350	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LT90-400	Liquidtight	METALLIC 90° LIQUIDTIGHT FITTING	SIX	58
LTMC-38100	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-50100	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-501000	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-75100	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-751000	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-100100	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-100200	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-12550	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-125200	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-15050	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-150100R	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-150150R	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-20025	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-20050	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-200100	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-25025	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-30025	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-35025	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LTMC-40025	Liquidtight	METALLIC LIQUIDTIGHT	SIX	62
LT-38	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-50	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-75	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-100	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-125	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-150	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-200	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-250	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-300	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-350	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
LT-400	Liquidtight	METALLIC STR LIQUIDTIGHT FITTING	SIX	58
MAB71	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB72	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB73	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB74	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB91	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB92	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB93	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAB94	Steel Boxes & Covers	MASONRY BOXES	NINE	89
MAG91	Steel Boxes & Covers	MASONRY BOXES - GANGABLE	NINE	90
MC-38S	BX, Flex & MC Fittings	TWO SCREW MULTI-PURPOSE CONNECTOR	TEN	101

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
MC-75S	BX, Flex & MC Fittings	STEEL CONNECTOR	TEN	101
MC-SAD-38S	BX, Flex & MC Fittings	SADDLE CONNECTOR	TEN	99
MCA-50S	BX, Flex & MC Fittings	STEEL CONNECTOR	TEN	101
MNC-38	BX, Flex & MC Fittings	TWO-SCREW STRAP CONNECTOR	TEN	99
MSB13	Steel Boxes & Covers	MULTI-GANG SWITCH BOX	NINE	76
MSB14	Steel Boxes & Covers	MULTI-GANG SWITCH BOX	NINE	76
MSB15	Steel Boxes & Covers	MULTI-GANG SWITCH BOX	NINE	76
MSB33	Steel Boxes & Covers	MULTI-GANG SWITCH BOX	NINE	76
MSB34	Steel Boxes & Covers	MULTI-GANG SWITCH BOX	NINE	76
MSB35	Steel Boxes & Covers	MULTI-GANG SWITCH BOX	NINE	76
NC-38	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
NC-75	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
NC-100	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
NC-125	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
NC-150	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
NC-200	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
NMLT-1038	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-1050	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-1075	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-1100	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-1125	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-1150	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-1200	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9038	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9050	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9075	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9100	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9125	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9150	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
NMLT-9200	Liquidtight	NON-METALLIC LIQUIDTIGHT CONN	SIX	57
OES-50S	EMT Fittings	ONE-HOLE EMT STRAP	THREE	21
OES-75S	EMT Fittings	ONE-HOLE EMT STRAP	THREE	21
OES-100S	EMT Fittings	ONE-HOLE EMT STRAP	THREE	21
OES-125S	EMT Fittings	ONE-HOLE EMT STRAP	THREE	21
OES-150S	EMT Fittings	ONE-HOLE EMT STRAP	THREE	21
OES-200S	EMT Fittings	ONE-HOLE EMT STRAP	THREE	21
ON-50	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-75	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-100	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-125	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-150	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-200	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-250	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-300	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-350	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ON-400	Rigid Fittings	RIGID OFF-SET NIPPLE	FOUR	35
ORS-50M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-50S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-75M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-75S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-100M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
ORS-100S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-125M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-125S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-150M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-150S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-200M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-200S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-250M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-250S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
ORS-250S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-300M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-300S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
ORS-300S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-350M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-350S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-350S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
ORS-400M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-400S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
ORS-400S	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	39
ORS-500M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
ORS-600M	Rigid Fittings	RIGID ONE-HOLE STRAP	FOUR	40
P3452-50	Steel Boxes & Covers	PANCAKE BOX	NINE	81
P4451-50	Steel Boxes & Covers	PANCAKE BOX	NINE	81
PBC-50NM	NM Cable Fittings	PVC SNAP-IN CONNECTOR	ELEVEN	109
PBC-75NM	NM Cable Fittings	PVC SNAP-IN CONNECTOR	ELEVEN	109
PCS-50M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-75M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-100M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-125M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-150M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-200M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-250M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-300M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-350M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PCS-400M-HDG	Hanging & Support	PARALLEL CLAMP	EIGHT	70
PE-50	EMT Fittings	PULL ELBOW	THREE	22
PE-75	EMT Fittings	PULL ELBOW	THREE	22
PE-100	EMT Fittings	PULL ELBOW	THREE	22
PE-125	EMT Fittings	PULL ELBOW	THREE	22
PEB-50	EMT Fittings	PULL ELBOW	THREE	22
PEB-75	EMT Fittings	PULL ELBOW	THREE	22
PEB-100	EMT Fittings	PULL ELBOW	THREE	22
PEB-125	EMT Fittings	PULL ELBOW	THREE	22
PH-50CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-75CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-100CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-105CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-125CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-150CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-200CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-250CB	Hanging & Support	PIPE HANGER	EIGHT	68

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
PH-300CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-350CB	Hanging & Support	PIPE HANGER	EIGHT	68
PH-400CB	Hanging & Support	PIPE HANGER	EIGHT	68
PL-50A	Weatherproof	CLOUSURE PLUG	THIRTEEN	122
PL-50P	Weatherproof	CLOUSURE PLUG	THIRTEEN	122
PL-75A	Weatherproof	CLOUSURE PLUG	THIRTEEN	122
PL-75P	Weatherproof	CLOUSURE PLUG	THIRTEEN	122
PL-100A	Weatherproof	CLOUSURE PLUG	THIRTEEN	122
PL-100P	Weatherproof	CLOUSURE PLUG	THIRTEEN	122
PS-50NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-75NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-100NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-125NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-150NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-200NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-250NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-300NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-350NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
PS-400NS	Hanging & Support	UNIVERSAL CONDUIT CLAMP	EIGHT	69
R2242-50	Steel Boxes & Covers	4" DOUBLE GANG DEVICE RING	NINE	87
R2243-50	Steel Boxes & Covers	4" DOUBLE GANG DEVICE RING	NINE	87
R2244-50	Steel Boxes & Covers	4" DOUBLE GANG DEVICE RING	NINE	87
R2245-25	Steel Boxes & Covers	4" DOUBLE GANG DEVICE RING	NINE	87
R2246-25	Steel Boxes & Covers	4" DOUBLE GANG DEVICE RING	NINE	87
R3K-50M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-75M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-100M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-125M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-150M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-200M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-250M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-300M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-350M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-400M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-500M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
R3K-600M	Rigid Fittings	THREE PIECE COUPLING	FOUR	24
RB-7N	Weatherproof	WEATHERPROOF ROUND BOX	THIRTEEN	122
RB-250100M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-250125M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-250150M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-250200M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-300100M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-300125M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-300150M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-300200M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-300250M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-350150M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-350200M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-350250M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-350300M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-400200M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
RB-400250M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-400300M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RB-400350M	Rigid Fittings	RIGID REDUCING BUSHING	FOUR	25
RC141-50	Steel Boxes & Covers	4" ROUND COVER	NINE	81
RC142-50	Steel Boxes & Covers	4" ROUND COVER	NINE	81
RC400	Steel Boxes & Covers	4" OCTAGON BOX COVER	NINE	80
RC401	Steel Boxes & Covers	4" OCTAGON BOX COVER	NINE	80
RC-1	Weatherproof	ROUND LAMP HOLDER COVER	THIRTEEN	115
RC-3	Weatherproof	ROUND LAMP HOLDER COVER	THIRTEEN	115
RC-125	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
RC-150	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
RC-200	NM Cable Fittings	TWO-SCREW STRAP TYPE CONNECTOR	ELEVEN	108
RCC40	Steel Boxes & Covers	4" DOUBLE GANG DEVICE RING	NINE	87
RCC-50M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-50S	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-75M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-75S	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-100M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-100S	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-125M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-125S	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-150M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-150S	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-200M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-200S	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-250M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-300M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-350M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-400M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-500M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCC-600M	Rigid Fittings	RIGID COMPRESSION CONN	FOUR	31
RCCI-50M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-50RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-50S	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-75M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-75RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-75S	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-100M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-100RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-100S	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-125M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-125RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-125S	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-150M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-150RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-150S	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-200M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-200RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-200S	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-250M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-250RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
RCCI-300M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-300RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-350M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-350RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-400M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-400RTM	Rigid Fittings	RAINTIGHT INSULATED COMPRESSION CONN	FOUR	33
RCCI-500M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCCI-600M	Rigid Fittings	RIGID INSULATED COMPRESSION CONN	FOUR	32
RCK-50M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-50RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-50S	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-75M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-75RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-75S	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-100M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-100RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-100S	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-125M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-125RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-125S	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-150M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-150RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-150S	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-200M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-200RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-200S	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-250M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-250RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-300M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-300RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-350M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-350RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-400M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-400RTM	Raintight Compression Couplings	RAINTIGHT COMPRESSION COUPLING	FOUR	33
RCK-500M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RCK-600M	Raintight Compression Couplings	RIGID COMPRESSION COUPLING	FOUR	34
RE-1	Weatherproof	LAMP HOLDER COVER	THIRTEEN	115
RE-3	Weatherproof	LAMP HOLDER COVER	THIRTEEN	115
RME-150200S	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RF-125S	Service Entrance	ROOF FLASHING	FOURTEEN	125
RF-150S	Service Entrance	ROOF FLASHING	FOURTEEN	125
RF-200S	Service Entrance	ROOF FLASHING	FOURTEEN	125
RF-250S	Service Entrance	ROOF FLASHING	FOURTEEN	125
RLT-38S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RLT-50S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RLT-75S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RLT-100S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RLT-125S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RLT-150S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RLT-200S	Transition Fittings	LIQUIDTIGHT COMBINATION COUPLING	SEVEN	66
RME-5075M	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
RME-5075S	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RME-75100M	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RME-75100S	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RME-100125M	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RME-100125S	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RME-125150M	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RME-125150S	Rigid Fittings	RIGID AND IMC ENLARGER	FOUR	26
RW75-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW100-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW100-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW125-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW125-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW125-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW150-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW150-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW150-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW150-125	Rigid Fittings	REDUCING WASHER	FOUR	38
RW200-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW200-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW200-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW200-125	Rigid Fittings	REDUCING WASHER	FOUR	38
RW200-150	Rigid Fittings	REDUCING WASHER	FOUR	38
RW250-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW250-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW250-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW250-125	Rigid Fittings	REDUCING WASHER	FOUR	38
RW250-150	Rigid Fittings	REDUCING WASHER	FOUR	38
RW250-200	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-125	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-150	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-200	Rigid Fittings	REDUCING WASHER	FOUR	38
RW300-250	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-125	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-150	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-200	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-250	Rigid Fittings	REDUCING WASHER	FOUR	38
RW350-300	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-50	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-75	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-100	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-125	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-150	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-200	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-250	Rigid Fittings	REDUCING WASHER	FOUR	38
RW400-300	Rigid Fittings	REDUCING WASHER	FOUR	38

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
RW400-350	Rigid Fittings	REDUCING WASHER	FOUR	38
RWA-38100	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-38250	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-50100	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-501000	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-75100	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-75500	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-10050	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-100300	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-12550	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-125200	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-15025	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-150100	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-20025	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-200100	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-25025	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-30025	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-35025	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWA-40025	Conduit	REDUCED WALL ALUMINUM FLEX	ONE/TEN	4/107
RWS-38100	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-50100	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-50500	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-501000	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-50100UL	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-75100	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-75300	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-75500	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-75100UL	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-751000UL	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-100100	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-100200	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-100300	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-10050UL	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-12550	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-125200	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-15050	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-150100	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-20025	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-200100	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-25025	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-30025	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-35025	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
RWS-40025	Conduit	REDUCED WALL STEEL FLEX	ONE/TEN	4/106
SBG410-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG420-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG440-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG445-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG500-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG503-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG518-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG519-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
SBG523-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG524-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	74
SBG565-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG567-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG570-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG574-50	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG591-25	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG600-25	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG601-25	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG604-25	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBG605-25	Steel Boxes & Covers	3X2 GANGABLE SWITCH BOX	NINE	75
SBS	Hanging & Support	SWITCH BOX SUPPORT BRACKET	EIGHT	73
SC-50S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-75S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-100S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-125S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-150S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-200S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-250S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-300S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-350S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SC-400S1	EMT Fittings	SET-SCREW CONNECTOR	THREE	18
SCI-50S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-75S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-100S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-125S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-150S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-200S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-250S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-300S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-350S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCI-400S1	EMT Fittings	SET-SCREW INSULATED CONNECTOR	THREE	19
SCR-50/75	Steel Boxes & Covers	4" SWIVEL COVER	NINE	81
SCS-50/75	Steel Boxes & Covers	4" SWIVEL COVER	NINE	81
SEC-60	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	123
SEC-62A	Service Entrance	SERVICE ENTRANCE CAP	FOURTEEN	123
SER-50S	Transition Fittings	SET SCREW COMBINATION COUPLING	SEVEN	66
SER-75S	Transition Fittings	SET SCREW COMBINATION COUPLING	SEVEN	66
SER-100S	Transition Fittings	SET SCREW COMBINATION COUPLING	SEVEN	66
SG-38	BX, Flex & MC Fittings	SADDLE CONNECTOR	TEN	98
SG-3838	BX, Flex & MC Fittings	DUPLEX SADDLE CONNECTOR	TEN	98
SKFC-38	Transition Fittings	EMT/FMC COMBINATION COUPLING	SEVEN	63
SKFC-50	Transition Fittings	EMT/FMC COMBINATION COUPLING	SEVEN	63
SKFC-75	Transition Fittings	EMT/FMC COMBINATION COUPLING	SEVEN	63
SKFC-100	Transition Fittings	EMT/FMC COMBINATION COUPLING	SEVEN	63
SKSQ-50	Transition Fittings	SQUEEZE COMBINATION COUPLING	SEVEN	63
SKSQ-75	Transition Fittings	SQUEEZE COMBINATION COUPLING	SEVEN	63
SKSQ-100	Transition Fittings	SQUEEZE COMBINATION COUPLING	SEVEN	63
SKSQ-125	Transition Fittings	SQUEEZE COMBINATION COUPLING	SEVEN	63
SKSQ-150	Transition Fittings	SQUEEZE COMBINATION COUPLING	SEVEN	63
SKSQ-200	Transition Fittings	SQUEEZE COMBINATION COUPLING	SEVEN	63

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
SK-50S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-75S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-100S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-125S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-150S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-200S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-250S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-300S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-350S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SK-400S1	EMT Fittings	SET SCREW COUPLING	THREE	18
SLB-50	Service Entrance	SERVICE ENTRANCE ELBOW	FOURTEEN	126
SLB-75	Service Entrance	SERVICE ENTRANCE ELBOW	FOURTEEN	126
SLB-100	Service Entrance	SERVICE ENTRANCE ELBOW	FOURTEEN	126
SLB-125	Service Entrance	SERVICE ENTRANCE ELBOW	FOURTEEN	126
SLB-150	Service Entrance	SERVICE ENTRANCE ELBOW	FOURTEEN	126
SLB-200	Service Entrance	SERVICE ENTRANCE ELBOW	FOURTEEN	126
SLPK-50S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-75S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-100S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-125S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-150S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-200S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-250S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-300S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-350S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SLPK-400S	EMT Fittings	EMT SLIP COUPLING	THREE	20
SQ90-38	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-38M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-50	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-50M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-75	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-75M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-100	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-100M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-125	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-125M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-150	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-150M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-200	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	92
SQ90-200M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-250M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-300M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-350M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ90-400M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE 90° CONNECTOR	TEN	93
SQ-38	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-38M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-50	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-50M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-75	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-75M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-100	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
SQ-100M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-125	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-125M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-150	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-150M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-200	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-200M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-250	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-250M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-300	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-300M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-350	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-350M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SQ-400	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	92
SQ-400M	BX, Flex & MC Fittings	FMC SQUEEZE TYPE CONNECTOR	TEN	93
SR-50	Liquidtight	SEALING RING	SIX	60
SR-75	Liquidtight	SEALING RING	SIX	60
SR-100	Liquidtight	SEALING RING	SIX	60
SR-125	Liquidtight	SEALING RING	SIX	60
SR-150	Liquidtight	SEALING RING	SIX	60
SR-200	Liquidtight	SEALING RING	SIX	60
SR-250	Liquidtight	SEALING RING	SIX	60
SR-300	Liquidtight	SEALING RING	SIX	60
SR-350	Liquidtight	SEALING RING	SIX	60
SR-400	Liquidtight	SEALING RING	SIX	60
SR-500	Liquidtight	SEALING RING	SIX	60
SR-600	Liquidtight	SEALING RING	SIX	60
SRC-50-250S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-50-350S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-50-450S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-50-560S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-50-650S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-250S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-350S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-450S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-560S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-650S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-750S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-75-850S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-100-560S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-100-650S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-100-750S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-100-850S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-100-950S	Cord Grip	STEEL CORD GRIP	TWELVE	110
SRC-100-1050S	Cord Grip	STEEL CORD GRIP	TWELVE	110
T17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
T77	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T87	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T97	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T107	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	53
T-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-50SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-75SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-100SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-125MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-125SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-150MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-150SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-200MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-200SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-250MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-250SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-300MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-300SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-350MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-350SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
T-400MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
T-400SC	Conduit Bodies	T TYPE RIGID CONDUIT BODY	FIVE	46
TA-50	BX, Flex & MC Fittings	TAKE-ALL CONNECTOR	TEN	104
TA-75	BX, Flex & MC Fittings	TAKE-ALL CONNECTOR	TEN	104
TA-100	BX, Flex & MC Fittings	TAKE-ALL CONNECTOR	TEN	104
TA-125	BX, Flex & MC Fittings	TAKE-ALL CONNECTOR	TEN	104
TA-150	BX, Flex & MC Fittings	TAKE-ALL CONNECTOR	TEN	104
TA-200	BX, Flex & MC Fittings	TAKE-ALL CONNECTOR	TEN	104
TB17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
TB27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
TB37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
TB47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
TB57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
TB67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	54
TGB50-3	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	117
TGB75-3	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	117
TGB100-3	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	117
TGB50-4	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	117
TGB50-5	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TGB50-5X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TGB50-6X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TGB50-7	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	119
TGB50-7X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	119
TGB75-4	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	117
TGB75-5	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TGB75-5X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TGB75-6X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TGB75-7	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	119
TGB75-7X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	119

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
TGB100-4	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	117
TGB100-5X	Weatherproof	WEATHERPROOF DOUBLE GANG	THIRTEEN	118
TB-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	51
TB-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	51
TB-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	51
TB-125MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	51
TB-150MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	51
TB-200MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	51
TBC-50SC	Conduit Bodies	TB TYPE COMBINATION CONDUIT BODY	FIVE	47
TBC-75SC	Conduit Bodies	TB TYPE COMBINATION CONDUIT BODY	FIVE	47
TBC-100SC	Conduit Bodies	TB TYPE COMBINATION CONDUIT BODY	FIVE	47
TBC-125SC	Conduit Bodies	TB TYPE COMBINATION CONDUIT BODY	FIVE	47
TBC-150SC	Conduit Bodies	TB TYPE COMBINATION CONDUIT BODY	FIVE	47
TBC-200SC	Conduit Bodies	TB TYPE COMBINATION CONDUIT BODY	FIVE	47
TC-50SC	Conduit Bodies	T TYPE COMBINATION CONDUIT BODY	FIVE	46
TC-75SC	Conduit Bodies	T TYPE COMBINATION CONDUIT BODY	FIVE	46
TC-100SC	Conduit Bodies	T TYPE COMBINATION CONDUIT BODY	FIVE	46
TC-125SC	Conduit Bodies	T TYPE COMBINATION CONDUIT BODY	FIVE	46
TC-150SC	Conduit Bodies	T TYPE COMBINATION CONDUIT BODY	FIVE	46
TC-200SC	Conduit Bodies	T TYPE COMBINATION CONDUIT BODY	FIVE	46
TES-50S	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TES-75S	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TES-100S	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TES-125S	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TES-150S	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TES-200S	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TH-050	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-50A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-075	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-75A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-100	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-100A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-125	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-125A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-150	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-150A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-200	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-200A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-250	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-250A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-300	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-300A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-350	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-350A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-400	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
TH-400A	Rigid Fittings	RIGID WATERTIGHT HUB	FOUR	29
THG-50	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-50M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-75	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-75M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-100	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
THG-100M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-125	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-125M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-150	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-150M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-200	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-200M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-250	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-250M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-300	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-300M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-350	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-350M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-400	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-400M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-500M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
THG-600M	Rigid Fittings	GROUNDING WATERTIGHT HUB	FOUR	30
TL-4A	Accessories and Grounding	THRU-IN LUG	FIFTEEN	128
TL-2A	Accessories and Grounding	THRU-IN LUG	FIFTEEN	128
TL-1/0A	Accessories and Grounding	THRU-IN LUG	FIFTEEN	128
TL-2/0A	Accessories and Grounding	THRU-IN LUG	FIFTEEN	128
TRS-50S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-75S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-100S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-125S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-150S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-200S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-250S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-250S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TRS-300S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-300S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TRS-350S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-350S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
TRS-400S	Rigid Fittings	TWO-HOLE RIGID STRAP	FOUR	39
TRS-400S*	EMT Fittings	TWO-HOLE EMT CONDUIT STRAP	THREE	21
UB-50S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-75S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-100S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-125S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-150S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-200S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-250S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-300S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-350S-HDG	Hanging & Support	U BOLT	EIGHT	71
UB-400S-HDG	Hanging & Support	U BOLT	EIGHT	71
UCSCK-38S	Transition Fittings	STRAP AND COMPRESSION COUPLING	SEVEN	64
UCSCK-50S	Transition Fittings	STRAP AND COMPRESSION COUPLING	SEVEN	64
UCSCK-75S	Transition Fittings	STRAP AND COMPRESSION COUPLING	SEVEN	64
UCSSK-38S	Transition Fittings	STRAP AND SET SCREW COUPLING	SEVEN	65
UCSSK-50S	Transition Fittings	STRAP AND SET SCREW COUPLING	SEVEN	65
UCSSK-75S	Transition Fittings	STRAP AND SET SCREW COUPLING	SEVEN	65

INDEX

PART#	SECTION NAME	PRODUCT DESCRIPTION	SECTION	PAGE
UCSSK-3875S	Transition Fittings	STRAP AND SET SCREW COUPLING	SEVEN	65
UCSSK-5075S	Transition Fittings	STRAP AND SET SCREW COUPLING	SEVEN	65
UCSI45-38M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 45° CONNECTOR	TEN	95
UCSI45-50M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 45° CONNECTOR	TEN	95
UCSI45-75M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 45° CONNECTOR	TEN	95
UCSI90-38M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 90° CONNECTOR	TEN	96
UCSI90-50M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 90° CONNECTOR	TEN	96
UCSI90-75M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 90° CONNECTOR	TEN	96
UCSI90-100M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE 90° CONNECTOR	TEN	96
UCSI-38S	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-50S	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-75S	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-100S	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-125M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-150M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-200M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-250M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-300M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-350M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
UCSI-400M	BX, Flex & MC Fittings	TOP-BITE SADDLE TYPE CONNECTOR	TEN	94
USB	Accessories and Grounding	UNIVERSAL SNAP-IN BUSHING	FIFTEEN	127
WGC-1	Service Entrance	WEDGE GRIP CJAMP	FOURTEEN	125
WGC-2	Service Entrance	WEDGE GRIP CJAMP	FOURTEEN	125
WGC-3	Service Entrance	WEDGE GRIP CJAMP	FOURTEEN	125
WIU-1P	Weatherproof	ANYCOVER™	THIRTEEN	111
WIUD-1P	Weatherproof	ANYCOVER™	THIRTEEN	111
WIUD-2P	Weatherproof	ANYCOVER™	THIRTEEN	111
WIUM-1DH	Weatherproof	ANYCOVER™	THIRTEEN	112
WIUM-1DV	Weatherproof	ANYCOVER™	THIRTEEN	112
WIUM-2SD	Weatherproof	ANYCOVER™	THIRTEEN	112
X17	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	55
X27	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	55
X37	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	55
X47	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	55
X57	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	55
X67	Conduit Bodies	GRAY IRON CONDUIT BODY	FIVE	55
X-50MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
X-75MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
X-100MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
X-125MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
X-150MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
X-200MSSC	Conduit Bodies	MALLEABLE IRON CONDUIT BODY	FIVE	50
XC-50SC	Conduit Bodies	X TYPE COMBINATION CONDUIT BODY	FIVE	47
XC-75SC	Conduit Bodies	X TYPE COMBINATION CONDUIT BODY	FIVE	47
XC-100SC	Conduit Bodies	X TYPE COMBINATION CONDUIT BODY	FIVE	47
XC-125SC	Conduit Bodies	X TYPE COMBINATION CONDUIT BODY	FIVE	47
XC-150SC	Conduit Bodies	X TYPE COMBINATION CONDUIT BODY	FIVE	47
XC-200SC	Conduit Bodies	X TYPE COMBINATION CONDUIT BODY	FIVE	47

NORTH AMERICAN DISTRIBUTION



**EAST
ELECTRICAL
SUPPLY INC**

***C-7429 Ninth Line.
Mississauga, ON L5N 0C1***

1-855-785-8275

www.EastElectricalSupply.com